



OUTDOOR STORAGE

MODEL N° 6446

OWNER'S MANUAL

COPY

Keep this Identification Number in case you must contact our Customer Service Department.

IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

Dear Valued Customer,

We would like to congratulate you on your purchase of a Lifetime® Outdoor Storage Shed! We are confident that you have made the perfect choice and you will be very pleased with your new storage solution.

Lifetime® Outdoor Storage is part of the family of products created and manufactured by Lifetime® Products, Inc. Like all of our products, you can be assured that the quality of your Lifetime Outdoor Storage Shed is the best in the world! And, we back that quality up by offering the best warranty in the business – A 10-year warranty that fully covers the Shed!

All of our Sheds are built with the highest-quality steel and high-density polyethylene (HDPE) parts. The design and construction of our steel-reinforced double-Wall Panels is second to none. All of our exposed steel parts and gables are powder coated and we use high-density polyethylene plastic. What makes polyethylene so special? It has superior strength and durability, and, it won't crack or degrade outdoors.

So now that you know the quality you are getting in a Lifetime Outdoor Storage Shed, please take the time to **READ THIS INSTRUCTION MANUAL!**

We have taken great care in providing the best possible form of instructions to help you put your new Outdoor Storage Shed together. Before you get started, **PLEASE** read the following preparation tips to help you get started!

We can assure you, your construction experience will be a lot more enjoyable if you do!

PREPARATION TIPS:

- The first step is simple... **RELAX!** You have made a great purchase, but Rome was not built in a day. Plan to spend a good part of your weekend putting together your fine Outdoor Storage Shed. Our philosophy is, if it comes together quickly and easily, it surely will come apart quickly and easily! Your Lifetime® Outdoor Storage Shed will surely last a long, long time, if you are patient, and take all the time necessary to put it together as we have instructed.
- Grab a friend to join in on the fun! This is not a one-person endeavor. We have found that not only will things go smoother if you have two or more people participating in the construction of the Shed, but it will go quicker as well. So, the more the merrier!
- Make sure you have all the tools necessary for constructing your new Shed. There is a "Tools Required For This Assembly" list on page five of this Owner's Manual.
- The plastic pieces of your Shed may become damaged by over tightening the screws. To avoid this damage, we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low-torque setting. If neither is available, use a hand screwdriver. If a hand screwdriver is all you have, take several breaks... your wrist will need it!
- You will also need two small ladders (when it comes time to do the roof!).

IMPORTANT! PLEASE READ BEFORE BEGINNING ASSEMBLY

- Before beginning assembly, remove the Parts List from the center of this Owner's Manual and take an inventory of the parts included with your Outdoor Storage Shed. Also, read through the entire instruction manual. It's always a great practice to get a feel for the flow of the process and to familiarize yourself with the parts involved. But, try not to get ahead of yourself and start the process out of order.
- **FOLLOW THE INSTRUCTIONS IN ORDER!** Everything goes together in a certain order, and we have learned what that correct order should be. In our state-of-the-art research and testing facility, we have painstakingly created these instructions. The order of construction is there for a reason, and some parts simply will not fit if built out of order. Just follow along with the order in the instructions and everything will fit together and things will go very smooth.
- **YOUR SHED MUST BE BUILT ON A LEVEL SURFACE!** If the spot you have chosen to place your wonderful new Outdoor Storage Shed is not level, the Shed will not assemble correctly! We recommend a concrete patio, a wood platform or creating a pad with pea gravel. Your Shed is meant to last a lifetime, so provide the proper foundation for it before you start to build.
- Before you build it, make sure you are allowed to build it! Consult all building codes, as well as city and county ordinances, to ensure that you do not require a building permit to construct your Outdoor Storage Shed. Proper building permit documentation may be required in your neighborhood, and it would be quite unfortunate to learn this after your Outdoor Storage Shed is already built!

Now that you're ready to begin the construction of your wonderful new Outdoor Storage Shed, step back, take a deep breath, get yourself a large cold beverage and enjoy yourself. We guarantee that after spending the right amount of time in building your Shed, you will be able to enjoy it for years to come.

Thanks for choosing Lifetime®, and have fun!

ABOUT LIFETIME PRODUCTS, INC.

Lifetime Products, Inc., has applied innovation and cutting-edge technology in plastics and metals to create a family of affordable lifestyle products that feature superior strength and durability. The world's leading manufacturer of folding tables and chairs, Lifetime was founded in 1986 as the maker of portable basketball systems that revolutionized the industry with patented technology. With diverse offerings such as outdoor storage sheds and steel utility trailers, Lifetime continues to develop innovative products that outfit the way you live.

Lifetime makes the things you need for the lifestyle you want. By innovating products in and around the home, Lifetime simplifies your everyday life and enables you to get the most out of your free time.



REGISTER YOUR LIFETIME PRODUCT TODAY!

There are benefits to registering your Lifetime product. With our new online product registration form, it's fast and easy! Register with us at www.lifetime.com and enjoy these great benefits:

- Receive exclusive money-saving offers from BuyLifetime.com, our online store, as well as NEW product notifications and special closeout promotions!
- In the unlikely event of a product recall or safety modification, we will notify you.
- Registering your product guarantees you warranty service. If you do not register your product, your warranty rights will not be diminished. But you will need to provide a sales receipt to verify your product purchase date before warranty service will be provided.

LIFETIME'S PROMISE TO YOU:

Maintaining your privacy is our long-standing policy at Lifetime. And you can rest assured that Lifetime will not sell or provide your personal data to other third parties, or allow them to use your personal data for their own purposes.

We invite you to read our privacy policy at www.lifetime.com

REGISTER today!

****U.S. and Canada customers ONLY****

IF ASSISTANCE IS NEEDED,

DO NOT CONTACT THE STORE!

CALL OUR CUSTOMER SERVICE DEPARTMENT at 1 (800) 225-3865

HOURS: 7:00 a.m. to 5:00 p.m. Monday through Friday (Mountain Standard Time)

Call, or visit our Web site for Saturday hours

For customers outside the U.S. or Canada, please contact the store for assistance.



SAFETY INSTRUCTIONS



FAILURE TO FOLLOW THESE WARNINGS MAY RESULT IN SERIOUS INJURY OR PROPERTY DAMAGE AND WILL VOID WARRANTY.

To ensure safety, do not attempt to assemble this product without following the instructions carefully. Check entire box and inside all packing material for parts and/or additional instruction material. Before beginning assembly, read the instructions and identify parts using the hardware identifier and parts list in this document. Proper and complete assembly, use and supervision are essential to reduce the risk of accident or injury.

- Do not use or store hot objects such as grills, blowtorches, welding equipment, etc. near the product.
- If using a ladder during assembly, use extreme caution.
- Two capable adults are required for assembly. (It is also recommended that a third adult function as an instruction reader.)

Most injuries are caused by misuse and/or not following instructions. Use caution when using this product.


BEFORE BEGINNING ASSEMBLY



Keep the hardware bags and their contents separate. If any parts are missing, call our Customer Service Department.



Read the "Congratulations" letter on page 2-3. Identify and inventory all parts and hardware using the parts and hardware lists and identifiers in this document.

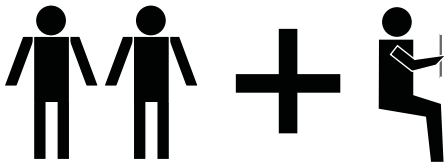

****Two adults required to complete assembly****
(+ one adult suggested as an instruction reader)

Only adults should set up the product. Do not allow children in the set-up area until assembly is complete.



TOOLS REQUIRED FOR THIS ASSEMBLY

7/16"




(2)

3/8"




(1)

Adjustable



(1)

Rubber Mallet



(1)

Box Knife



(1)

Phillips Screwdriver



(1)

Plain Screwdriver



(1)

3/8" Masonry Bit



(1)

2" x 4" x 8' Leveling Board




(1)

6' Ladder




(2)

Power Drill*



(1)

Work Light



(1)

Pliers




(1)

Flashlight



(1)

Hammer Drill*



(1)

Safety Glasses



(1 for each person)

Tape Measure



(1)

*See "Screwdriver Notice" on page 7.

ASSEMBLY GUIDES

Refer to the following areas throughout the instructions to assist in the assembly process:

This area is located at the top, left-hand corner of the page and indicates which tools and hardware are needed to complete the assembly steps on a page.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



This area is located at the top, right-hand corner of the page and shows an image of the product with shaded parts indicating which section is being assembled.

SEC #

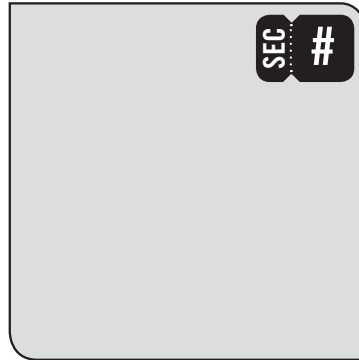

This area is usually located in the bottom, left-hand corner of a step and indicates that special attention is needed to perform a particular part of a step.



Note:



These areas are usually located in the bottom, right-hand corner of a step and indicate that damage to the product or serious injury may occur if the caution or warning is not heeded.



CAUTION



WARNING

IMPORTANT NOTICES

Level Surface Notice:

Surface must be leveled before installation. We recommend building a level work space with a concrete or patio style surface. If the surface is not properly leveled, the Outdoor Shed will not assemble correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.

Building Code Notice:

Consult all local building codes, as well as city and county ordinances, to ensure that the construction of the Outdoor Shed does not require a building permit. Proper building permit documentation may be required in your neighborhood, and it would be unfortunate to learn this after constructing the Shed.

Screwdriver Notice:

You may use a #2 Phillips head screwdriver bit and a power screwdriver or drill, instead of a hand screwdriver. However, be aware that the plastic pieces of your Shed can be damaged by overtightening of screws. To avoid damage we strongly recommend the use of a low-powered power screwdriver or a drill that has an adjustable clutch that is set on a low torque setting. If neither is available, use a hand screwdriver. In any case use caution to avoid overtightening the screws.

Floor Puncture Notice:

Sharp objects may damage your floor. If resting sharp, heavy objects on your Shed floor, place a block of wood between the sharp object and floor.



CAUTION:

If more than six (6) inches of snow accumulate on the roof of the shed, carefully remove the snow to avoid possible roof collapse. While standing on the ground, remove the snow from the roof with a broom or snow shovel. Do not stand on the roof to remove snow.

PARTS & HARDWARE LIST

BOX 1

ID	Description	Qty
BDJ	Left Shed Door	1
BDK	Right Shed Door	1
BDU	Upper Right, Front Gable Roof Panel	1
BDT	Upper Left, Front Gable Roof Panel	1
BDS	Lower Right, Front Gable Roof Panel	1
BDR	Lower Left, Front Gable Roof Panel	1
AGQ	Roof Panel	6
AGR	Outer Floor Panel	2
AFX	Center Floor Panel	2
BDW	Entry Gable Roof Cap	1
AHC	Skylight	4
AGG	Left End Roof Cap	1
AFW	Right End Roof Cap	1
AFY	Center Roof Cap	3
AGH	Side Gable 1	2
AGI	Side Gable 2	2
AVF	90" Shelf	2
BDC	Entry Gable	1
AFZ	Corner Shelf	4

CKP METAL PARTS KIT 1

AFH	Truss Gutter Channel	3
AFG	Roof Truss Brace	3
AFM	Wall/Shelf Support Channel	6
AFC	Door End Channel	2
BDD	Entry Gable Header	1

CKQ METAL PARTS KIT 2

BDQ	Center Truss Channel	1
BDP	Right Truss Channel	1
BDO	Left Truss Channel	1

BOX 2

AHH	Window Wall Panel	2
AGW	Corner Wall Panel 106	2
AGL	Corner Wall Panel 107	2
AHD	Wall Panel	5
AHE	Window	2
CKN	Right Half-Wall Panel	1
CKL	Left Half-Wall Panel	1
AYI	Shutter	4
AFL	Roof Support Strip	6
AQX	Truss Connector	3

CKO SMALL PARTS BOX

AIW	Wood Block	1
AIX	Wood Shim	4
AFU	Pegboard Strip	2

BDZ TOOL HARDWARE

ADC	#2 Phillips Bit	1
-----	-----------------	---

BQH FLOOR ASSEMBLY HARDWARE

BQC	#8 x 1/2" Pan-Head Screw	20
-----	--------------------------	----

CKS TRUSS ASSEMBLY HARDWARE

ADJ	1/4" Cap Nut	30
ADY	#10 x 3/8" Pan-Head Screw	20
ADK	#10 Cap Nut	20
AQY	1/4" x 2" Phillips Truss Screw	20
ADH	1/4" Threaded Rod	5

CFL WALL PANEL INSTALLATION HARDWARE

ADZ	1/4" x 5/8" Pan-Head Screw	100
-----	----------------------------	-----

BEE ENTRY GABLE ASSEMBLY HARDWARE

ADV	1/4" x 1 1/8" Pan Head Screw	4
AHS	End Plug	2

BHV SIDE GABLE ASSEMBLY HARDWARE (x2)


AGP	Louvered Vent	1
AIQ	Vent Screen	1
ADW	#10 x 3/4" Pan-Head Screw	5
AEE	#10 x 1/2" Flat Washer	5
ADZ	1/4" x 5/8" Pan-Head Screw	4
AHS	End Plug	2
ACB	#10 x 1 1/4" Pan-Head Screw	1
ADV	1/4" x 1 1/8" Pan-Head Screw	6

ID	Description	Qty
BEF	LEFT DOOR ASSEMBLY HARDWARE	
AHZ	Left Door Handle	1
AHM	Deadbolt Latch	2
ABU	1/4" x 1 1/2" Carriage Bolt	2
ADW	#10 x 3/4" Pan-Head Screw	3
AEE	#10 x 1/2" Flat Washer	3
ADJ	1/4" Cap Nut	2
AIA	Left Door Lock Bracket	1
AIB	Left Door Strike Plate	1
BEG	RIGHT DOOR ASSEMBLY HARDWARE	
AIK	Right Door Handle	1
ABV	1/4" x 2" Carriage Bolt	2
ADB	3/8" x 1/2" Steel Spacer	2
AAB	1/4" Centerlock Nut	2
AHY	Latch Spring	1
AHW	Latch Block	1
AIO	Thumb Lever	1
ADW	#10 x 3/4" Pan-Head Screw	4
AHX	Latch Cover Plate	1
AHV	Door Latch	1
AIL	Right Door Lock Bracket	1
AEB	1/4" Flat Washer	2
AEE	#10 x 1/2" Flat Washer	5
CKR	GABLE, TRUSS, DOOR & ROOF INSTALLATION HARDWARE	
ADZ	1/4" x 5/8" Pan-Head Screw	215
AED	#10 x 1" Fender Washer	36
AQZ	Entry Gable Bracket	2
ADX	#10 x 1/2" Pan-Head Screw	40
ARA	1/8" Drill Bit	1
AXX	Truss Hole Insert	4
AHO	Door Hinge Bushing	2
AHP	Cotter Pin	2
AQY	1/4" x 2" Phillips Truss Screw	4
ADJ	1/4" Cap Nut	4
AJA	1/2" Foam Cube	2
	SHELVING INSTALLATION HARDWARE	
BHH	90" SHELF INSTALLATION HARDWARE (x2)	
ADZ	1/4" x 5/8" Pan-Head Screw	14
AIY	Shelf Support Bracket	2
BHI	CORNER SHELF INSTALLATION HARDWARE (x4)	
ADZ	1/4" x 5/8" Pan-Head Screw	4
BEJ	WINDOW INSTALLATION HARDWARE (x2)	
ADZ	1/4" x 5/8" Pan-Head Screw	4
AIS	Window Latch Bracket	2
ADY	#10 x 3/8" Pan-Head Screw	1
BHC	PEGBOARD STRIP INSTALLATION HARDWARE	
ADW	#10 x 3/4" Pan-Head Screws	10
BHD	Tool Clip Assortment Hardware	
AIF	2" Double-Arm Hook	1
AIG	4" Double-Arm Hook	1
AIH	"J" Hook	3
AIL	"L" Hook	3
AIJ	Toolholder	2
BJI	SHUTTER INSTALLATION HARDWARE (x2)	
ADS	1/4" x 3/4" Pan-Head Screw	8
BOX 3		
AHD	Wall Panel	2
AFX	Center Floor Panel	1
AGQ	Roof Panel	2
AFY	Center Roof Cap	1
AHC	Skylight	1
AFG	Roof Truss Brace	1
AFH	Truss Gutter Channel	2
AFL	Roof Support Strip	2
AQX	Truss Connector	1
BOX 4		
AHD	Wall Panel	2
AFX	Center Floor Panel	1
AGQ	Roof Panel	2
AFY	Center Roof Cap	1
AHC	Skylight	1
AFG	Roof Truss Brace	1
AFH	Truss Gutter Channel	2
AFL	Roof Support Strip	2
AQX	Truss Connector	1


PARTS IDENTIFIER

BOX 1


Parts shown at 4% of actual size

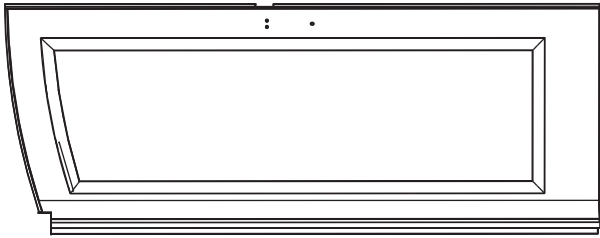


BDJ (x1)
Left Shed Door

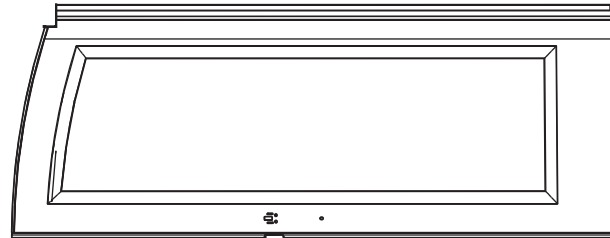

BDK (x1)
Right Shed Door

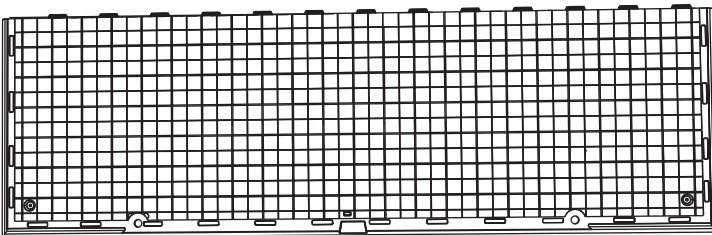


AGR (x2)
Outer Floor Panel

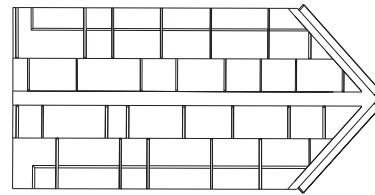


BDW (x1)
Entry Gable Roof Cap




AFZ (x2)
Corner Shelf

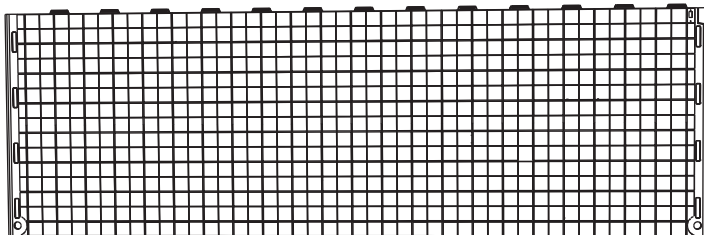


AFX (x2)
Center Floor Panel




AGQ (x6)
Roof Panel




AFY (x3)
Center Roof Cap



BDU (x1)
Upper Right, Front Gable Roof Panel




BDT (x1)
Upper Left, Front Gable Roof Panel




AGG (x1)
Left End Roof Cap



AHC (x4)
Skylight



BDR (x1)
Lower Left, Front Gable Roof Panel



BDS (x1)
Lower Right, Front Gable Roof Panel




AFW (x1)
Right End Roof Cap

PARTS IDENTIFIER


BOX 1 (CONT.)

Parts shown at 4% of actual size

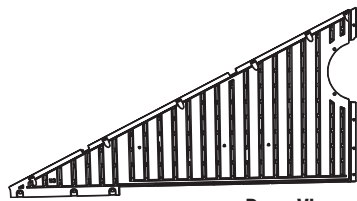


AGH (x2)
Side Gable 1

Rear View

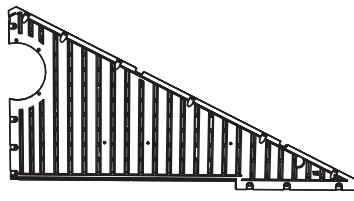

AGI (x2)
Side Gable 2

Rear View

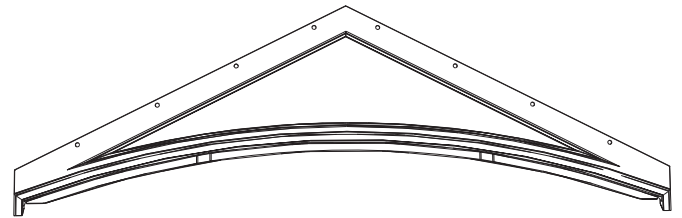

BDC (x1)
Entry Gable


Rear View





AVF (x2)
90" Shelf

METAL PARTS KIT 1 [CKP]


Parts shown at 8% of actual size




***AFC (x2)**
Door End Channel





***AFH (x3)**
Truss Gutter Channel




***BDD (x1)**
Entry Gable Header



***AFG (x3)**
Roof Truss Brace



***AFM (x6)**
Wall/Shelf Support Channel




PARTS IDENTIFIER

BOX 1 (CONT.)


METAL PARTS KIT 2 [CKQ]

Parts shown at 8% of actual size

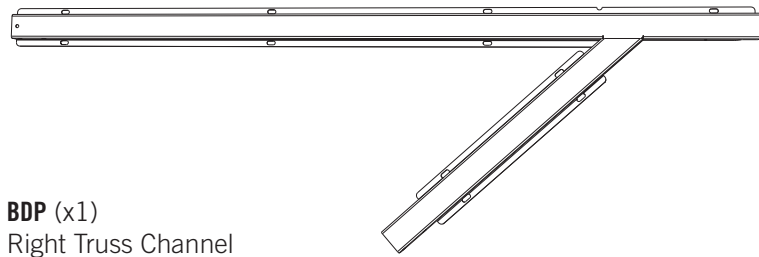

BDP (x1)
Right Truss Channel


BDO (x1)
Left Truss Channel

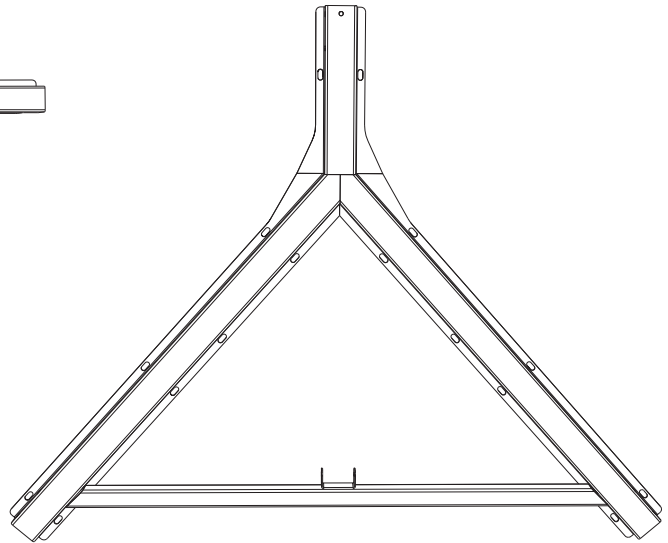


BDQ (x1)
Center Truss Channel

BOX 2


Parts are shown 4% of actual size (*Unless noted otherwise)

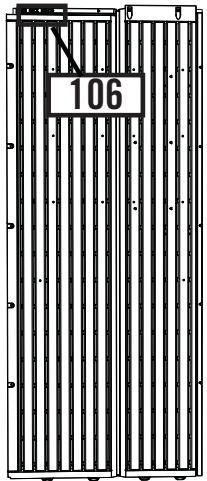

AGW (x2)
Corner Wall Panel 106

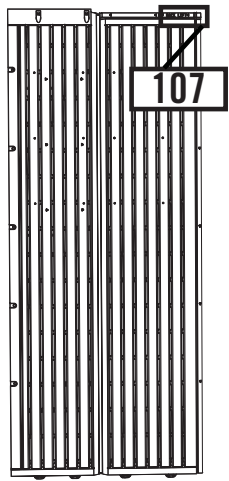


AGL (x2)
Corner Wall Panel 107

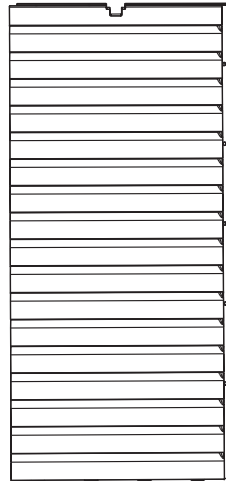


AHD (x5)
Wall Panel




AHH (x2)
Window Wall Panel



AHE (x2)
Window




CKN (x1)
Right Half-Wall Panel



AYI (x4)
Shutter



CKL (x1)
Left Half-Wall Panel



***AQX** (x3)
Truss Connector

Part are shown 8% of actual size



AFL (x6)
Roof Support Strip

PARTS & HARDWARE IDENTIFIER

BOX 2 (CONT.)

SMALL PARTS BOX [CK0]

Parts are shown 4% of actual size




AIW (x1)
Wood Block



AIX (x4)
Wood Shim

Parts shown at 15% of actual size



AFU (x2)
Pegboard Strip

[BDZ] TOOL BAG


Tools shown at actual size



ADC (x1)
#2 Phillips Bit

[BQH] FLOOR ASSEMBLY HARDWARE

Hardware shown at actual size



BQC (x20)
#8 x 1/2" Pan-Head Screw (Only 12 used)

[CKS] TRUSS FRAME ASSEMBLY HARDWARE


Hardware shown at actual size (*unless otherwise noted)




ADJ (x30)
1/4" Cap Nut




ADK (x20)
#10 Cap Nut



ADY (x20)
#10 Flat-Head Screw




AQY (x20)
1/4" x 2" Phillips Truss Screw



***ADH** (x5) 1/4" Threaded Rod

[CFL] WALL PANEL INSTALLATION HARDWARE


Hardware shown at actual size



ADZ (x100)
1/4" x 5/8" Pan-Head Screw

[BEE] ENTRY GABLE ASSEMBLY HARDWARE

Hardware shown at actual size (*unless otherwise noted)



ADV (x4)
1/4" x 1 1/8" Pan-Head Screw




AHS (x2)
End Plug

PARTS & HARDWARE IDENTIFIER


BOX 2 (CONT.)

[BHV] SIDE GABLE ASSEMBLY HARDWARE (x2)


Hardware shown at actual size (*unless otherwise noted)




***AGP** (x1)
Louvered Vent




ADZ (x4)
1/4" x 5/8" Pan-Head Screw




AEE (x5)
#10 x 1/2" Flat Washer




AHS (x2)
End Plug




ACB (x1)
#10 x 1 1/4" Pan-Head Screw



***AIQ** (x1)
Vent Screen




ADV (x6)
1/4" x 1 1/8" Pan-Head Screw




ADW (x5)
#10 x 3/4" Pan-Head Screw

[BEF] LEFT DOOR ASSEMBLY HARDWARE


Hardware shown at actual size (*unless otherwise noted)



***AHZ** (x1)
Left Door Handle




***AHM** (x2)
Deadbolt Latch



ABU (x2)
1/4" x 1 1/2" Carriage Bolt



ADW (x3)
#10 x 3/4" Pan-Head Screw




AEE (x3)
#10 x 1/2" Flat Washer



ADJ (x2)
1/4" Cap Nut



***AIA** (x1)
Left Door Lock Bracket




***AIB** (x1)
Left Door Strike Plate

SHELF INSTALLATION HARDWARE

Hardware shown at actual size (*unless otherwise noted)

[BHH] 90" Shelf Installation Hardware (x2)




ADZ (x14)
1/4" x 5/8" Pan-Head Screw



***AIY** (x2)
10" Shelf Bracket

[BHI] Corner Shelf Installation Hardware (x4)




ADZ (x4)
1/4" x 5/8" Pan-Head Screw

PARTS & HARDWARE IDENTIFIER


BOX 2 (CONT.)

[BEG] RIGHT DOOR ASSEMBLY HARDWARE


Hardware shown at actual size (*unless otherwise noted)




***AIK (x1)**
Right Door Handle




ABV (x2)
1/4" x 2" Carriage Bolt




AEE (x5)
#10 x 1/2" Flat Washer




ADB (x2)
3/8" x 1/2" Steel Spacer




AAB (x2)
1/4" Centerlock Nut




AHY (x1)
Latch Spring




***AHW (x1)**
Latch Block



***AIO (x1)**
Thumb Lever




ADW (x4)
#10 x 3/4" Pan-Head Screw




AEB (x2)
1/4" Flat Washer



***AHX (x1)**
Latch Cover Plate




***AHV (x1)**
Door Latch




***AIL (x1)**
Right Door Lock Bracket

[CKR] GABLE, TRUSS, DOOR, & ROOF INSTALLATION HARDWARE


Hardware shown at actual size (*unless otherwise noted)




ADZ (x215)
1/4" x 5/8" Pan-Head Screw



AED (x36)
#10 x 1" Fender Washer



***AXX (x4)**
Truss Hole Insert




ADX (x40)
#10 x 1/2" Pan-Head Screw




AHP (x2)
Cotter Pin




ARA (x1)
1/8" Drill Bit

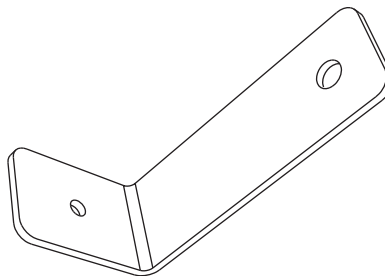


***AQZ (x2)**
Entry Gable Bracket



AJA (x2)
Foam Cube



AHO (x2)
Door Hinge Bushing




AQY (x4)
1/4" x 2" Phillips Truss Screw



ADJ (x4)
1/4" Cap Nut

[BJI] SHUTTER INSTALLATION HARDWARE (x2)

Hardware shown at actual size




ADS (x8)
1/4" x 3/4" Phillips Pan-Head Screw

PARTS & HARDWARE IDENTIFIER


BOX 2 (CONT.)

[BEJ] WINDOW INSTALLATION HARDWARE (x2)


Hardware shown at actual size (*unless otherwise noted)



ADZ (x4)
1/4" x 5/8" Pan-Head Screw




ADY (x1)
#10 x 3/8" Pan-Head Screw



***AIS** (x2)
Window Latch Bracket


[BHC] PEGBOARD INSTALLATION HARDWARE

Hardware shown at actual size




ADW (x10)
#10" x 3/4" Pan-Head Screw


Hardware shown at 50% of actual size

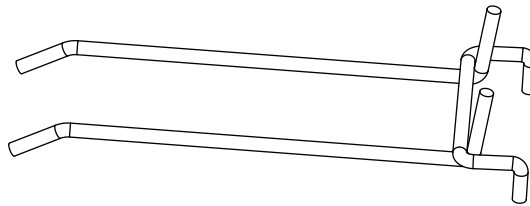


AIG (x1)
4" Double-Arm Hook




AIJ (x2)
Toolholder

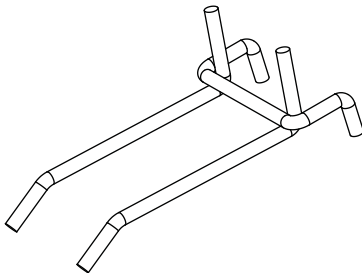

AIF (x1)
2" Double-Arm Hook



AIH (x3)
J-Hook




AII (x3)
L-Hook


PARTS IDENTIFIER

BOX 3


Part are shown 4% of actual size

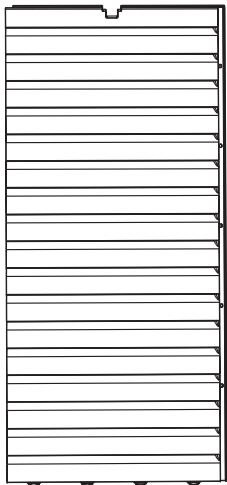

AHD (x2)
Wall Panel

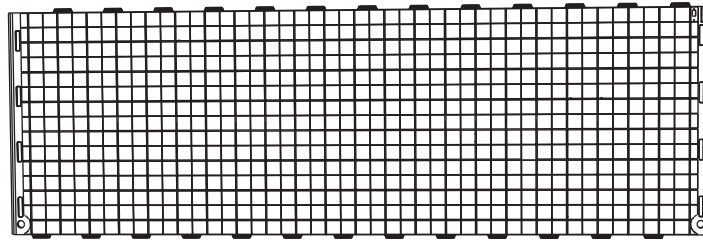


AFX (x1)
Center Floor Panel



AFY (x1)
Center Roof Cap



AHC (x1)
Skylight




AGQ (x2)
Roof Panel



Part are shown 8% of actual size (*unless otherwise noted)



AFL (x6)
Roof Support Strip




AFH (x3)
Truss Gutter Channel



***AQX (x1)**
Truss Connector




AFG (x3)
Roof Truss Brace




PARTS IDENTIFIER

BOX 4


Part are shown 4% of actual size

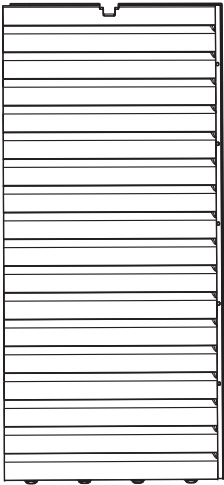

AHD (x2)
Wall Panel

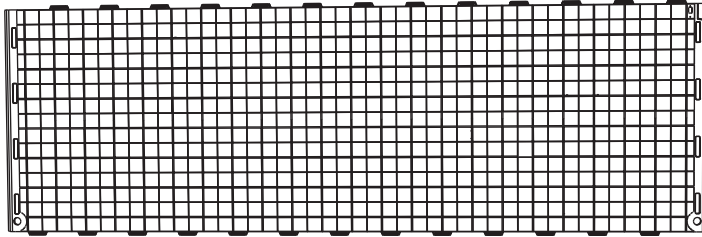


AFX (x1)
Center Floor Panel



AFY (x1)
Center Roof Cap



AHC (x1)
Skylight




AGQ (x2)
Roof Panel

Part are shown 8% of actual size (*unless otherwise noted)





AFL (x6)
Roof Support Strip




AFH (x3)
Truss Gutter Channel



AFG (x3)
Roof Truss Brace



***AQX** (x1)
Truss Connector






TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 1



Concrete (2 cu. yd.)

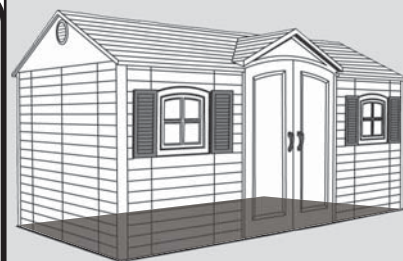


SEC

1.1

SITE PREPARATION - CONCRETE PLATFORM PREPARATION

The actual dimensions of your shed (at its widest and longest points) are 15' x 8'. Ensure you select a site that will accommodate these measurements. The base of the shed is slightly smaller than this, so you will need to create a level surface that is at least 178" x 93 1/2". We recommend using a level cement or patio style surface. This will provide the best long-term performance for your shed.

! *Note: Shed Extension Kits are available for this shed. Please consider possible shed expansion when planning the site for your shed. See back cover of this manual for information on ordering accessories.*

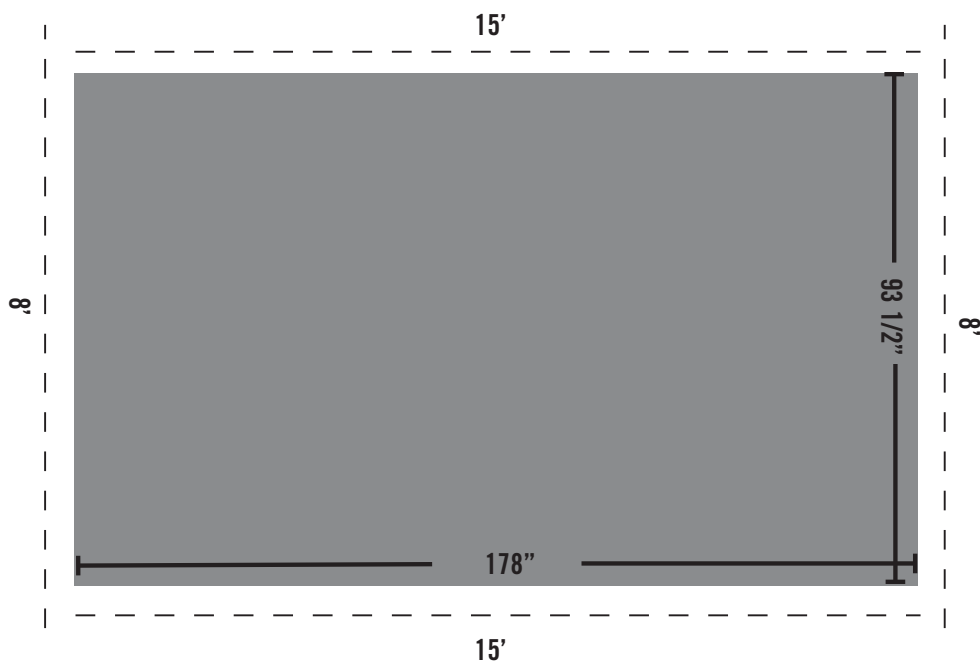

! *Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.*

! *Note: Any platform or similar structure should be built above ground in order to avoid water pooling inside the Shed.*




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



2" x 4" x 90 1/2" (x13) (Not included)




2" x 4" x 178" (x2) (Not included)



16d 3" Common Nail (x64) (Not included)

SEC 1

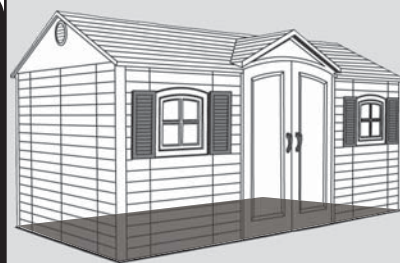

SEC


1.2

ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY


Ensure all lumber used is treated and approved for outdoor use. Build outside frame to 178" x 93 1/2" outside dimensions:



Note: Whenever possible, you should use the surfaces described on Page 7. When this is not possible, we recommend you use a wood platform or a filled wood frame.

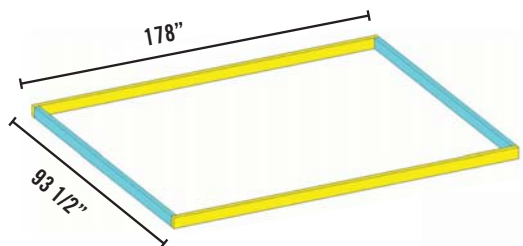


To ensure studs are in the correct location for nailing plywood in the next step, start measuring from the corner 16", and then measure from center to center.

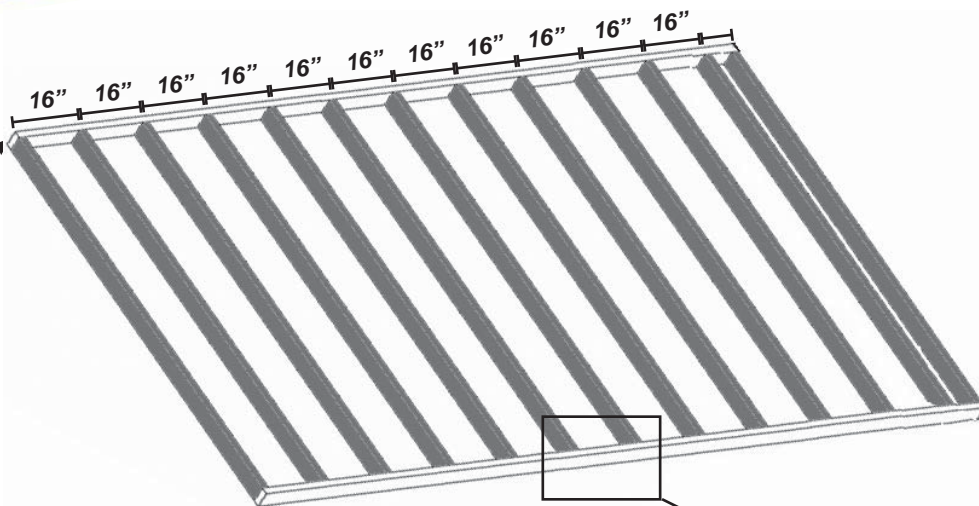

Note: All lumber must be rated for outdoor use.



Note: Surface must be leveled before installation. If the surface is not properly leveled, the Outdoor Shed will not assemble or function correctly. Proper surface leveling will save you time in the long run, so please do not ignore this step.




Place the 2" x 4" x 90 1/2" boards on the inside of the frame. Nail each board in place with the 16d nails.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC 1

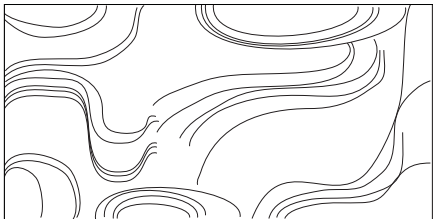


48" x 93 1/2" x 3/4" Treated Plywood (x3)
(Not included)



34" x 93 1/2" x 3/4" Treated Plywood (x1)
(Not included)



8d 1 1/2" Common Nail (x68)
(Not included)

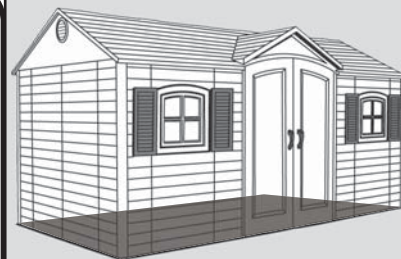


SEC

1.3

ALTERNATIVE SITE PREPARATION: OPTION 1 - WOOD PLATFORM ASSEMBLY (CONT)

Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B.

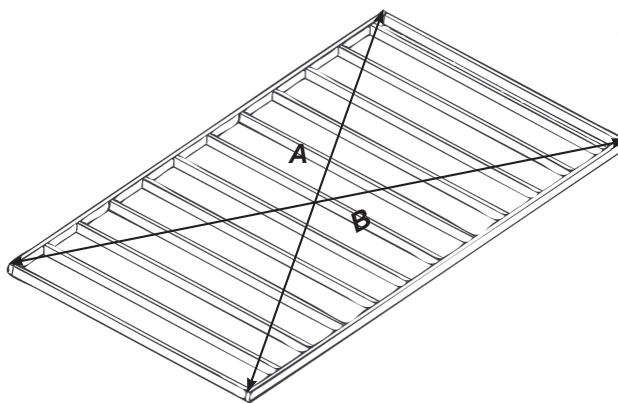

Note: All lumber must be rated for outdoor use.

SEC

1.4

Cut Plywood into sizes called for on previous page. Arrange the Plywood according to the diagram and nail into place with 8d x 1 1/2" nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt until platform is stable. Drill three evenly spaced 1/2" drain holes in plywood between each 2" x 4" joist.

48" x 93 1/2"	48" x 93 1/2"	48" x 93 1/2"	34" x 93 1/2"
---------------	---------------	---------------	---------------




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 1

2" x 4" x 178" (x2) (Not included)



2" x 6" x 86 1/2" (x2) (Not included)




8d 1 1/2" Common Nail (x16)
(Not included)



Pea Gravel (15 Cubic Feet)
(Not included)

L-Bracket (x4)
(Not included)

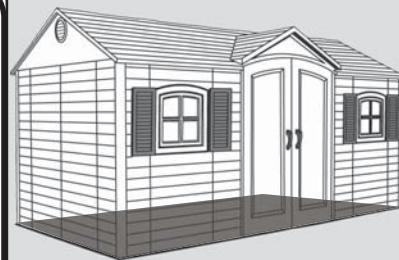

SEC

1.5

ALTERNATIVE SITE PREPARATION: OPTION 2 - FILLED WOOD FRAME ASSEMBLY



Cut outside frame to 178" x 93 1/2" **outside dimensions**. Lay boards flat so widest parts face up. Ensure frame is level. Square up the frame by measuring from corner to corner. Measurement A should equal Measurement B. Nail an L-Bracket on each corner of the frame with 8d nails. Place platform in the desired location. If platform does not rest level on the ground, build up low points with loose dirt or "Pea" gravel, until platform is stable.



Note: Whenever possible you should use the surfaces described on Page 7.




Note: All lumber must be rated for outdoor use.

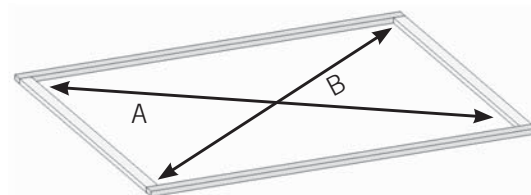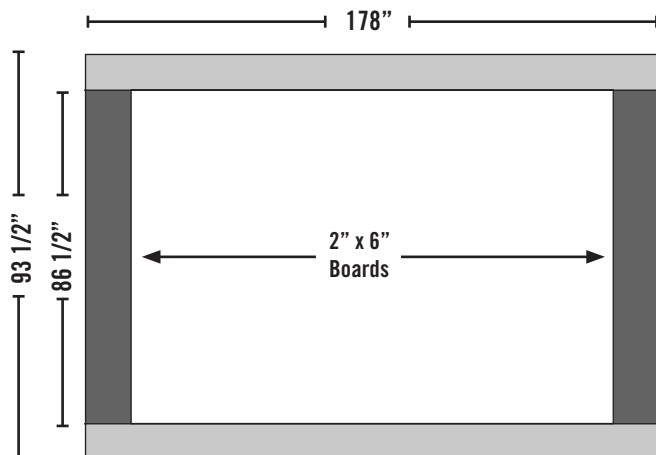

SEC

1.6


Once all boards are level and do not wobble, pack "Pea" gravel around the outside of the frame, and slope away from frame.

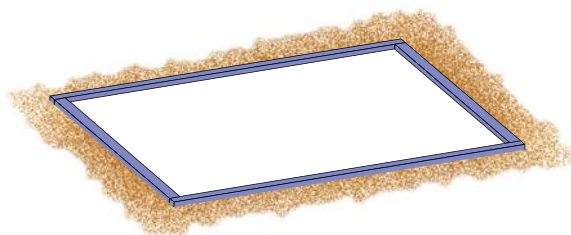

SEC

1.7

Now fill the inside of the frame with "Pea" gravel. Use a leveling board to scrape off extra fill material and to level the surface.

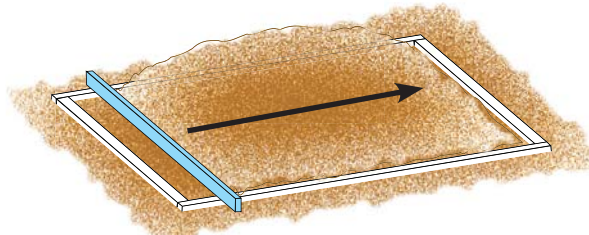


2" x 4" x 8' Leveling Board (x1)


SEC 2 FLOOR ASSEMBLY

HARDWARE REQUIRED

Part shown at actual size



BQC (x20)
#8 x 1/2" Pan-Head Screw



AHO (x2)
Door Hinge Bushing


Remove the two (2) Door Hinge Bushings from Gable, Truss, Door, & Roof Installation Hardware Bag.

METAL PARTS REQUIRED


NO METAL PARTS REQUIRED FOR THIS SECTION

PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

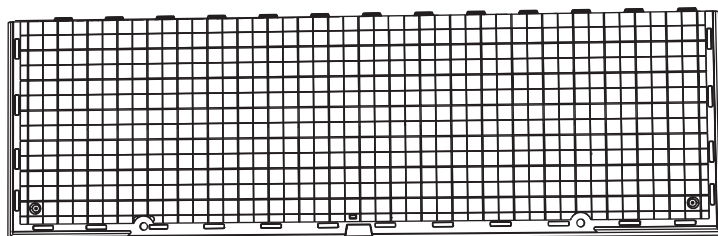


AGR (x2)
Outer Floor Panel

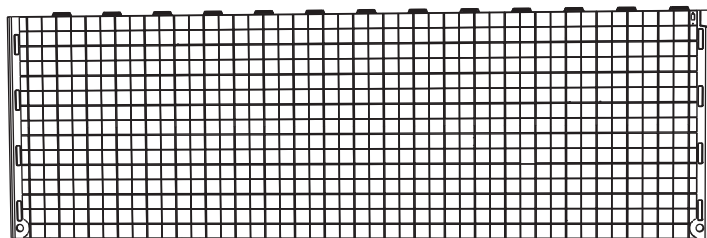


AFX (x4)
Center Floor Panel

TOOLS REQUIRED



Phillips Screwdriver




Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC 2

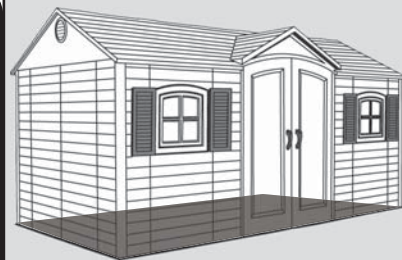


NO HARDWARE REQUIRED FOR THIS STEP

SEC

2.1

FLOOR ASSEMBLY


Lay an **Outer Floor Panel (AGR)** flat on the ground. Hold a **Center Floor Panel (AFX)** at an angle as shown and fit tabs into slots. Lay Center Floor Panel flat.

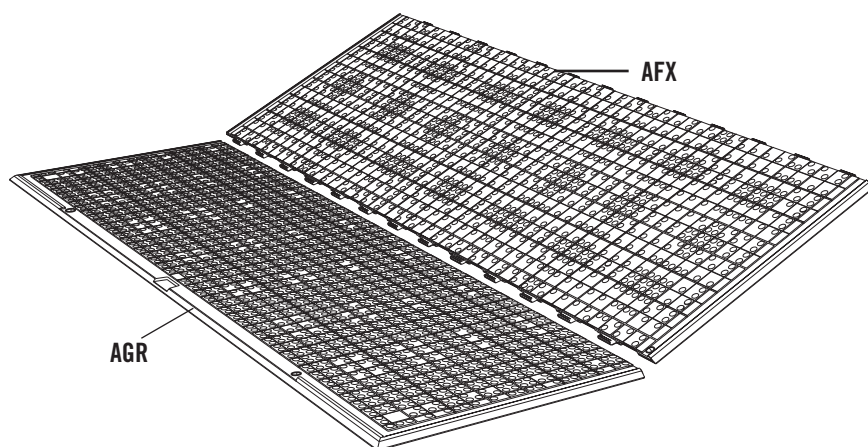

SEC

2.2

Hold the second **Center Floor Panel (AFX)** at an angle as shown and fit tabs into slots. Lay Center Floor Panel flat.

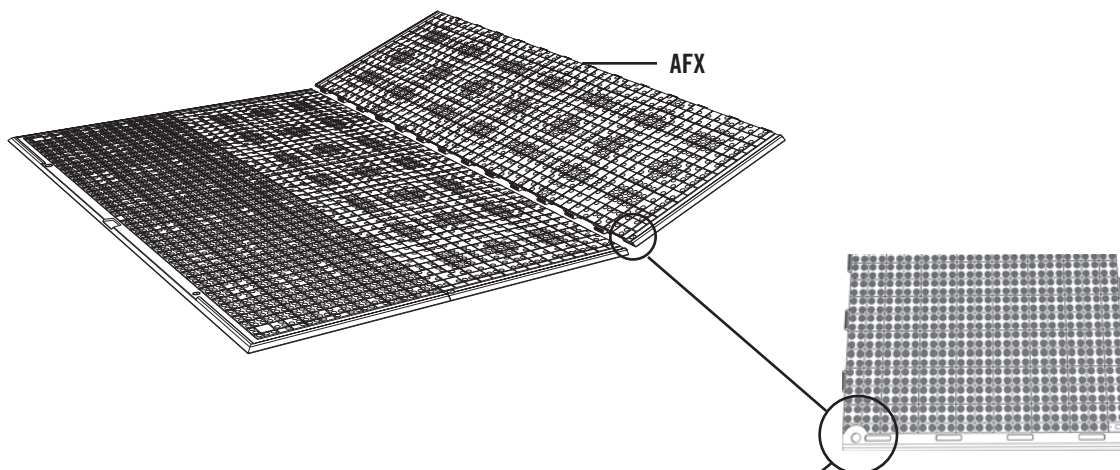

Note: Ensure you insert the Inner Floor Panel (AFX) with the Door Hinge Bushing Holes toward the outside. You'll place the Doors here later.



CAUTION

Sharp objects may damage your floor. If resting sharp, heavy objects on your shed floor, place a block of wood between the sharp object and floor.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS STEP


SEC 2

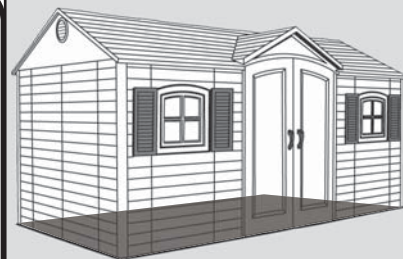

SEC

2.3

Lay another **Center Floor Panel (AFX)** down and connect it to the previous Center Floor Panel.

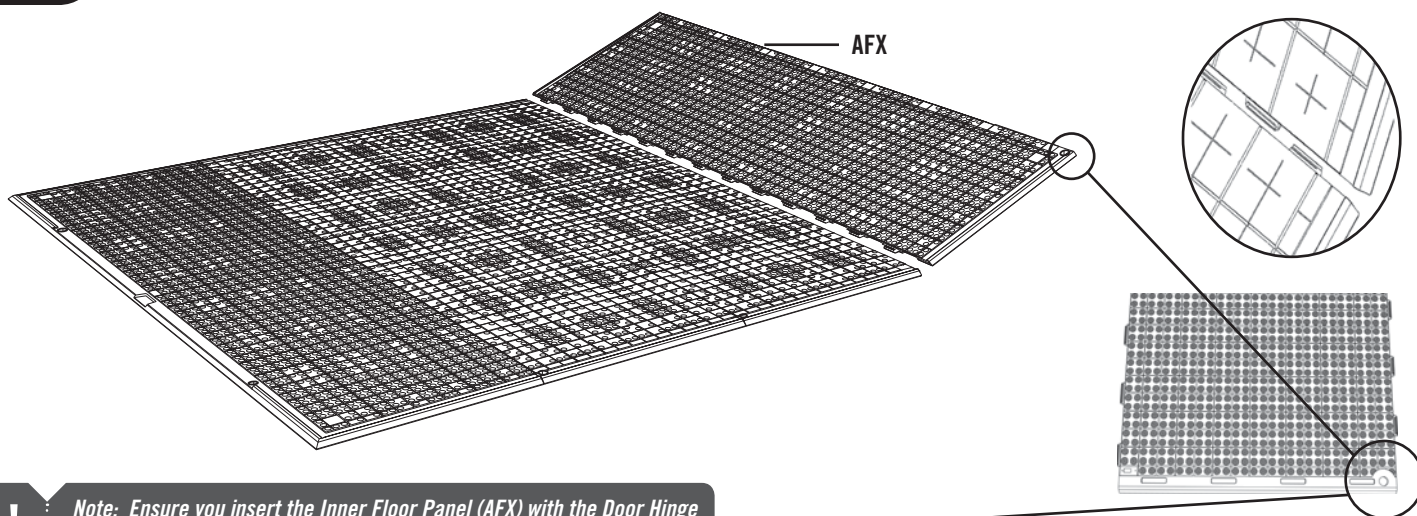


Note: Ensure you insert the Inner Floor Panel (AFX) with the Door Hinge Bushing Holes toward the outside. You'll place the Doors here later.

SEC


2.4

Lay another **Center Floor Panel (AFX)** down and connect it to the previous Center Floor Panel.

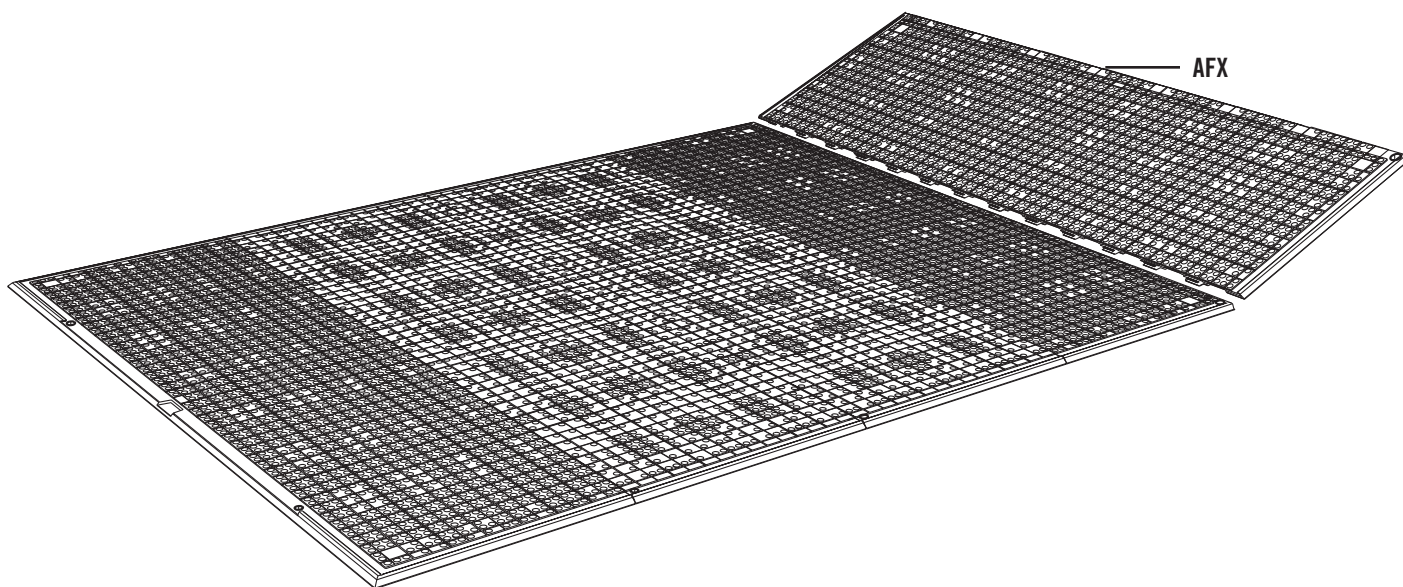




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AHO (x2)


SEC 2

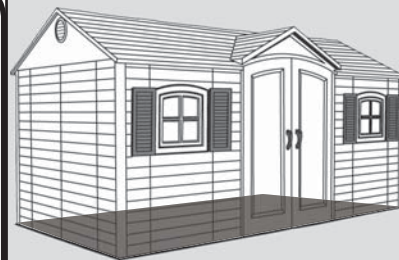

SEC

2.5


Finally, lay down the last **Outer Floor Panel (AGR)** and connect it to the previous Center Floor Panel as shown.

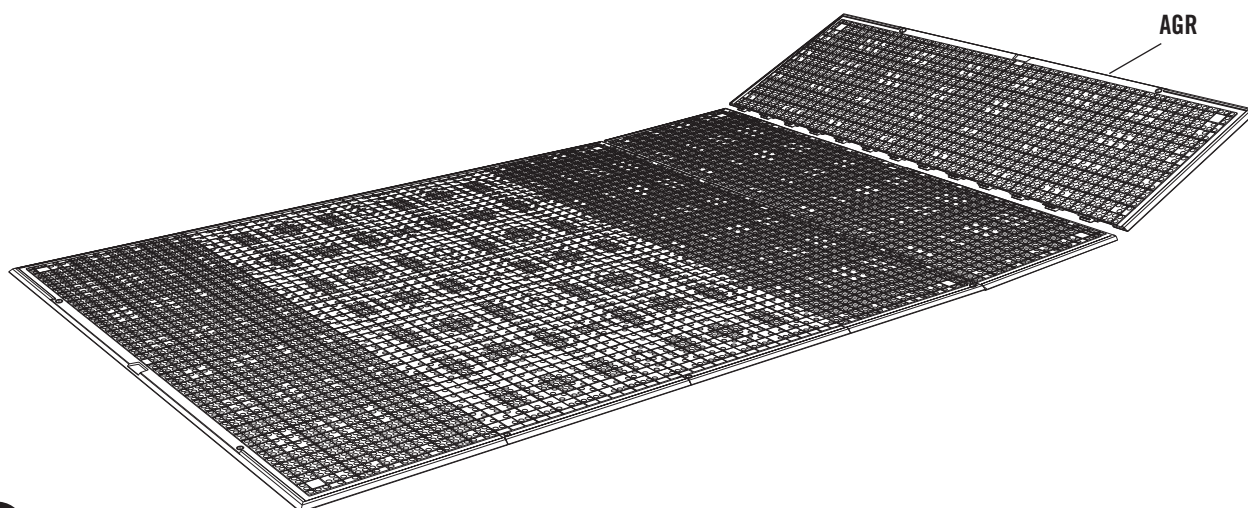

SEC




2.6

Remove the two (2) **Door Hinge Bushings (AHO)** from the **Hardware Bag [BEH]**. Lift the Floor Panels up enough to slide the Door Hinge Bushings under and up through the holes in the outer edges of the Floor Panels as shown.

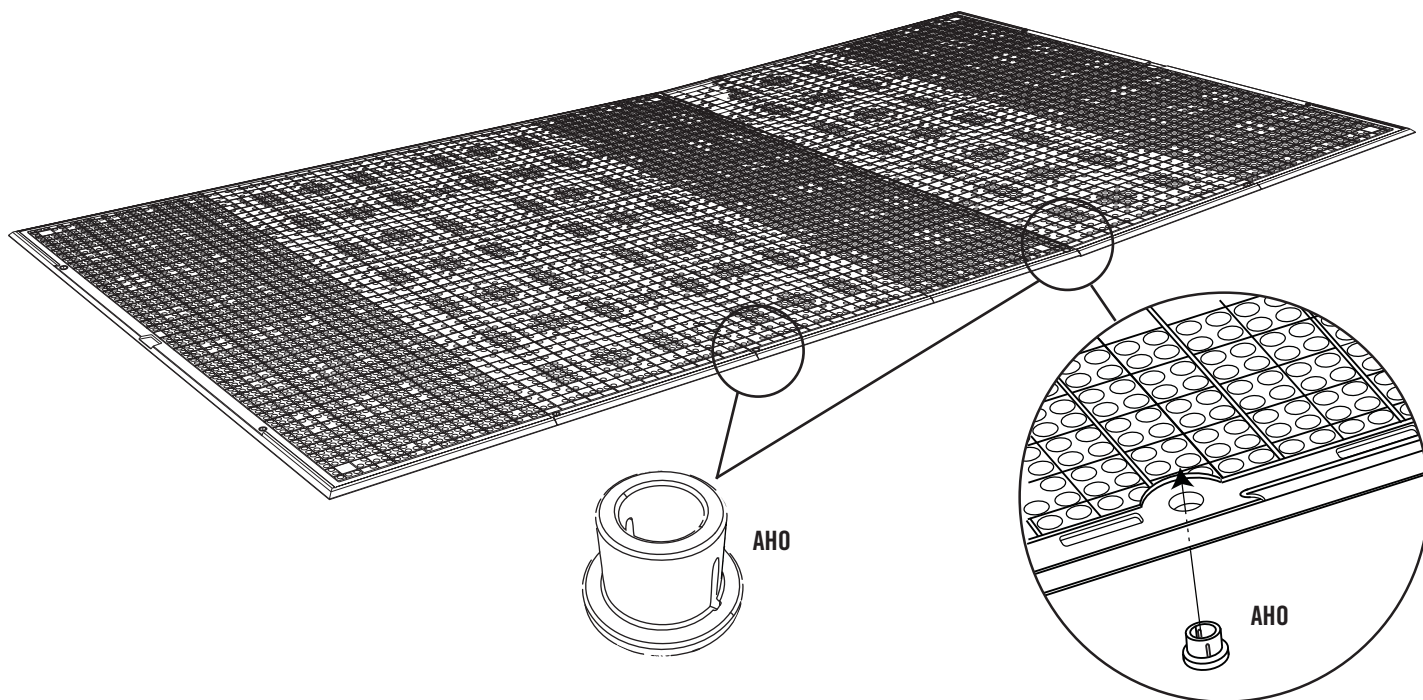




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



BQC (x20)


SEC 2

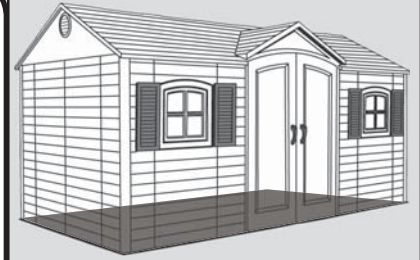

SEC

2.7

Face the seam of two adjacent Floor Panels. Insert two (2) #8 x 1/2" Pan-Head Screws (BQC) near the seam of a Floor Panel and down into the tab of the adjacent Floor Panel at the locations shown. Repeat this step for both sides of each seam in the Floor.

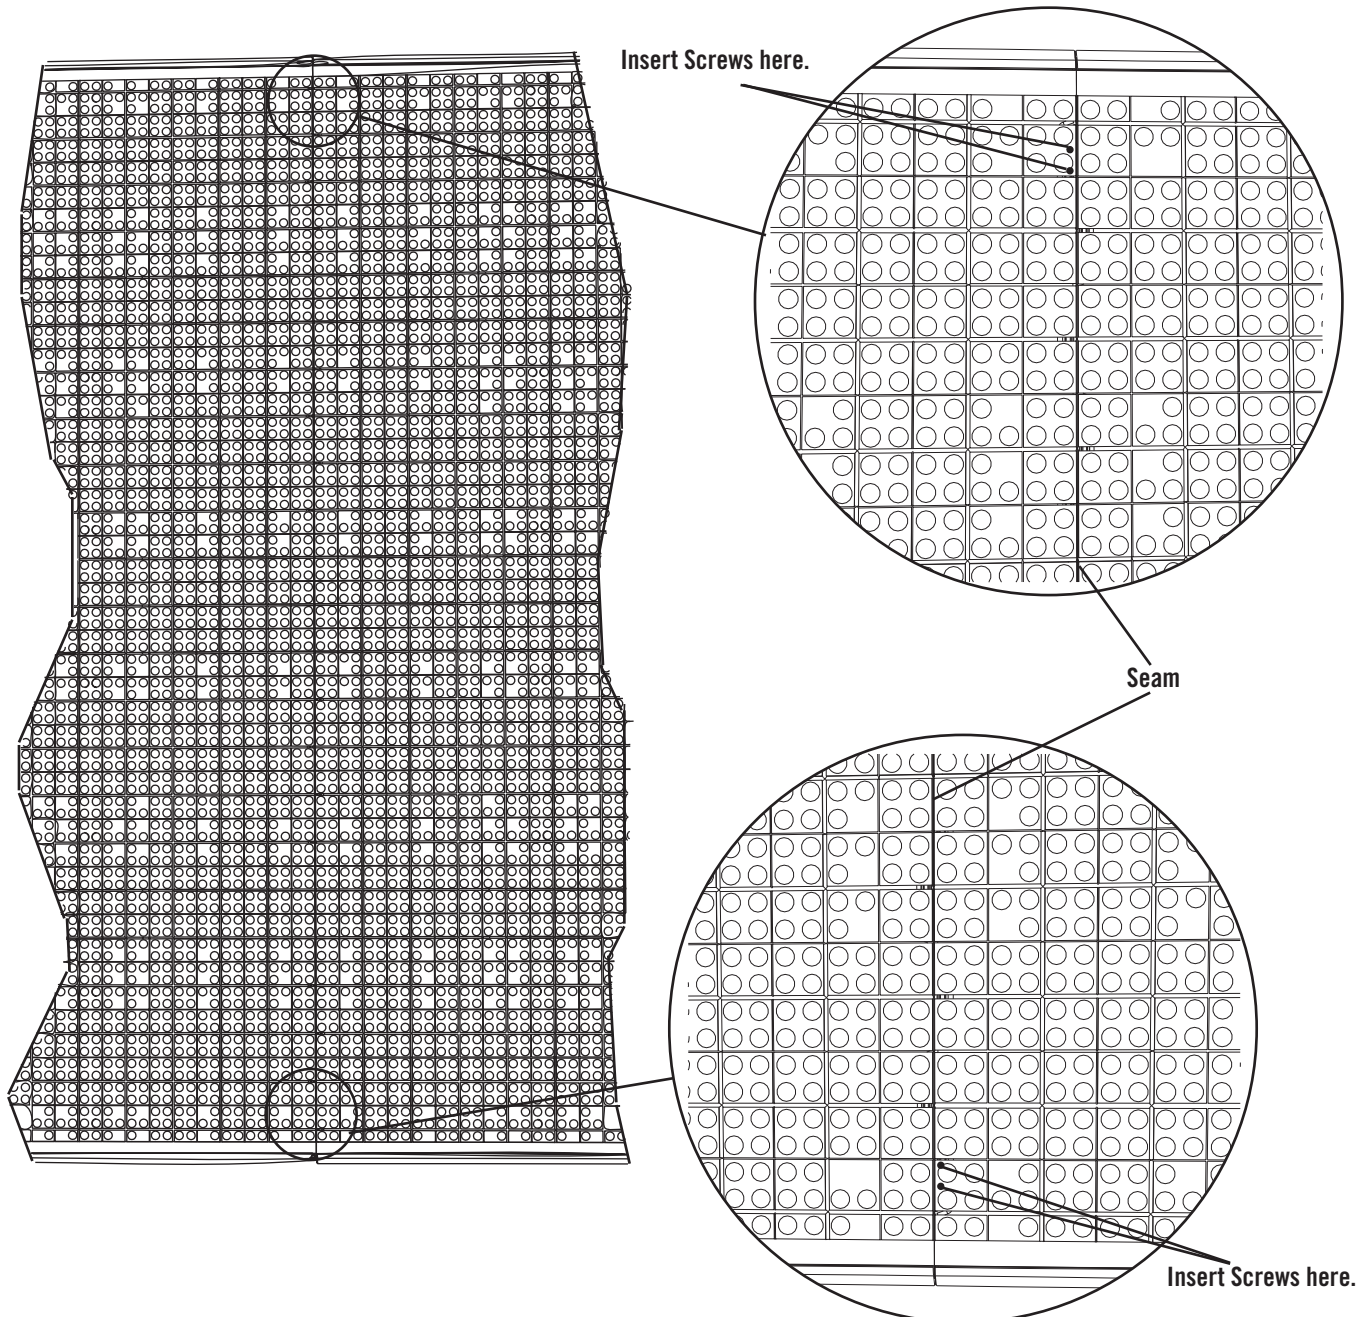




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



IF YOU PLAN ON ANCHORING YOUR SHED, CHECK WITH YOUR LOCAL HARDWARE STORE FOR SUITABLE HARDWARE.

SEC 2

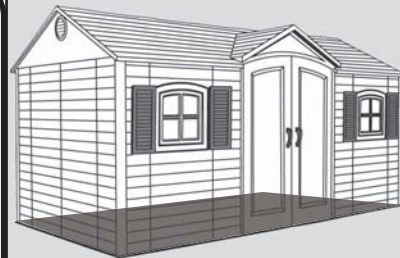


SEC

2.8

ANCHORING THE SHED

If you plan on anchoring your shed, you can anchor it to your platform through the four indentations near the corners of the floor. The anchoring hardware used depends on the platform. If you have a concrete platform, we recommend using four (4) 3/8" Anchor Bolts and four (4) 3/8" x 1" Flat Washers. If you have a wood framed platform, we recommend using four (4) 3/8" Lag Bolts and four (4) 3/8" x 1" Flat Washers. Do not exceed a 3/8" diameter bolt. Refer to your local hardware store for this hardware. **Do not tighten the anchoring hardware until instructed to do so at the end of these instructions.**

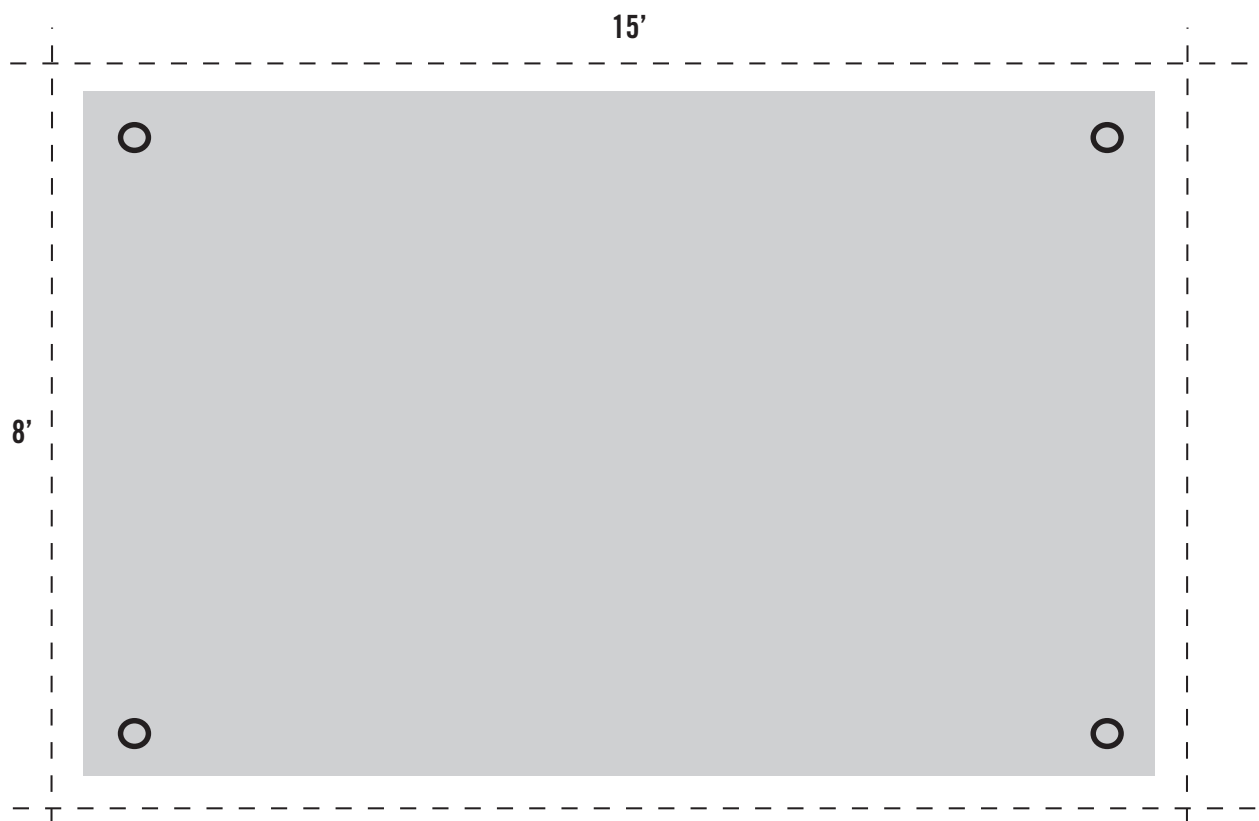


WARNING

Failure to anchor the shed may result in property damage and/or personal injury.


SEC 3 TRUSS ASSEMBLY

HARDWARE REQUIRED

Hardware shown at actual size



AQY (x20)
1/4" x 2" Truss Screw



ADY (x20)
#10 x 3/8" Screw



ADK (x20)
#10 Cap Nut




ADJ (x30)
1/4" Cap Nut

METAL PARTS REQUIRED

Parts shown at 8% of actual size
(*Unless indicated otherwise)




BDP (x1)
Right Angled Truss Channel

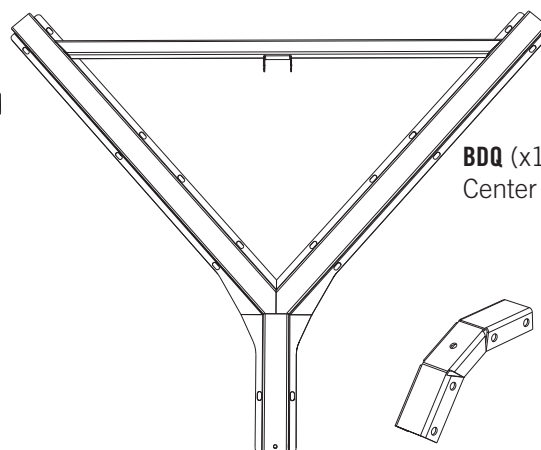


BDQ (x1)
Center Truss Channel




BDO (x1)
Left Angled Truss Channel




***AQX (x5)**
Truss Connector




AFH (x7)
Truss Gutter Channel



AFG (x5)
Roof Truss Brace



Part shown at 50% of actual size




ADH (x5) 1/4" Threaded Rod

PLASTIC PARTS REQUIRED

NO PLASTIC PARTS REQUIRED FOR THIS SECTION

TOOLS REQUIRED




Phillips Screwdriver



7/16" Wrench (x2)




3/8" Wrench




Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"




AQY (x4)



ADJ (x4)

SEC 3

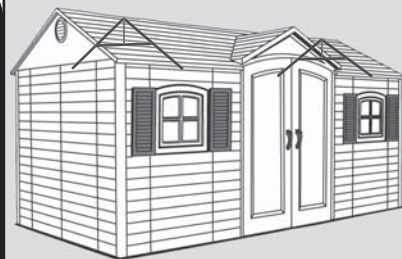


SEC

3.1


SIDE ANGLED TRUSS ASSEMBLY

Stand a **Truss Gutter Channel (AFH)** upright and set a **Truss Connector (AQX)** inside the end of the Left Angled Truss Channel as shown (Notch goes at opposite end of Truss Connector). Align the holes and secure with two (2) 1/4" x 2" Phillips Truss Screws (**AQY**) and two (2) 1/4" Cap Nuts (**ADJ**).

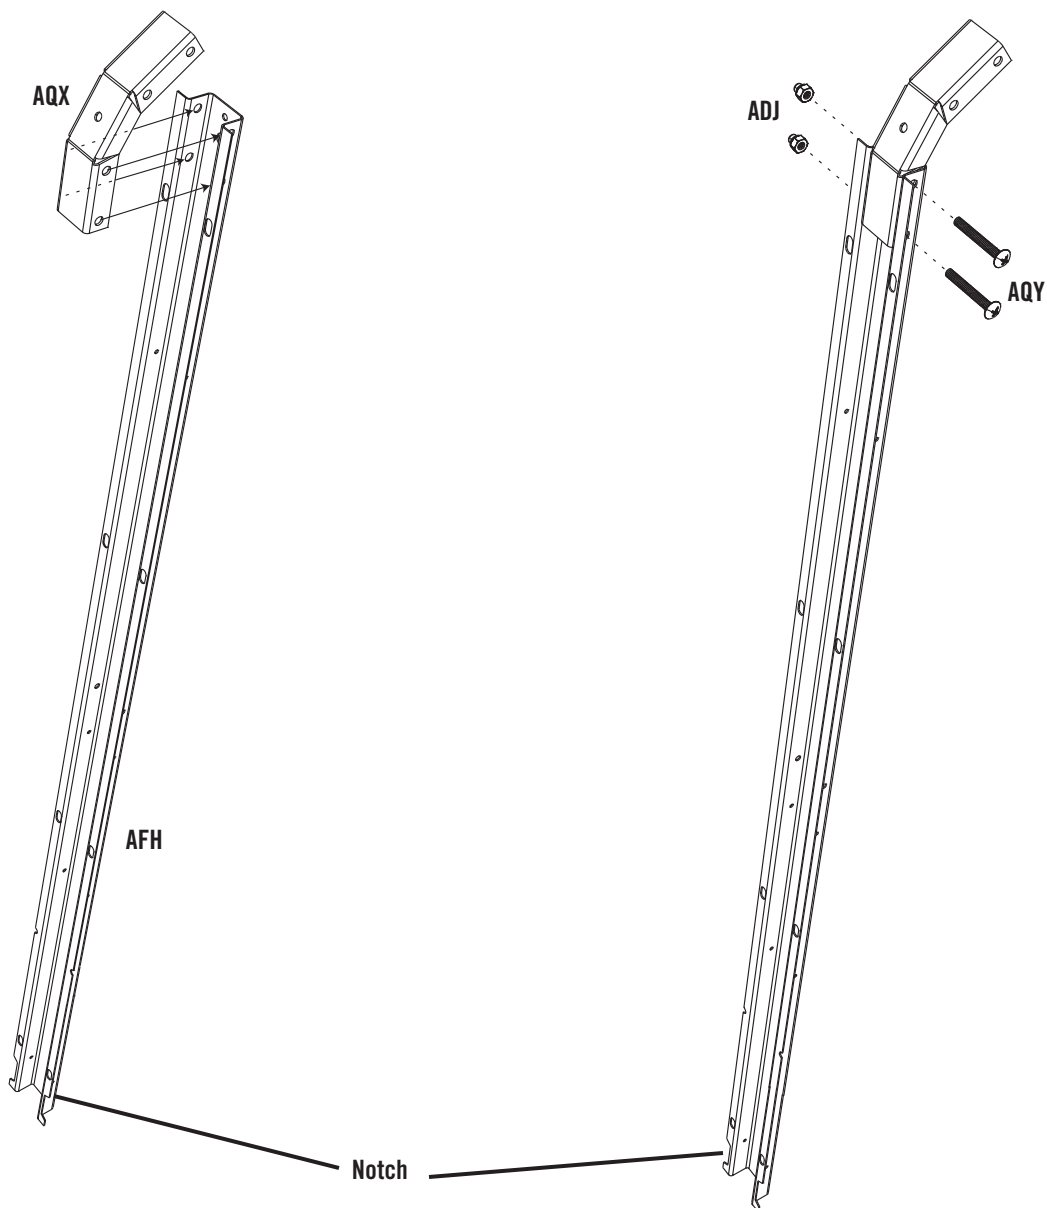




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"




AQY (x4)



ADJ (x4)


SEC. 3

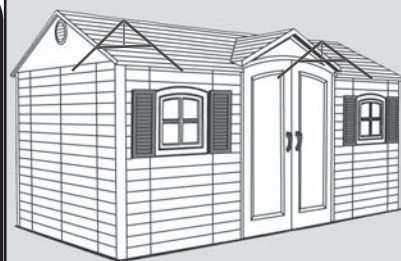

SEC

3.2

Connect another **Truss Gutter Channel (AFH)** to the Truss Connector using two (2) **1/4" x 2" Phillips Truss Screws (AQY)** and two (2) **1/4" Cap Nuts (ADJ)**.


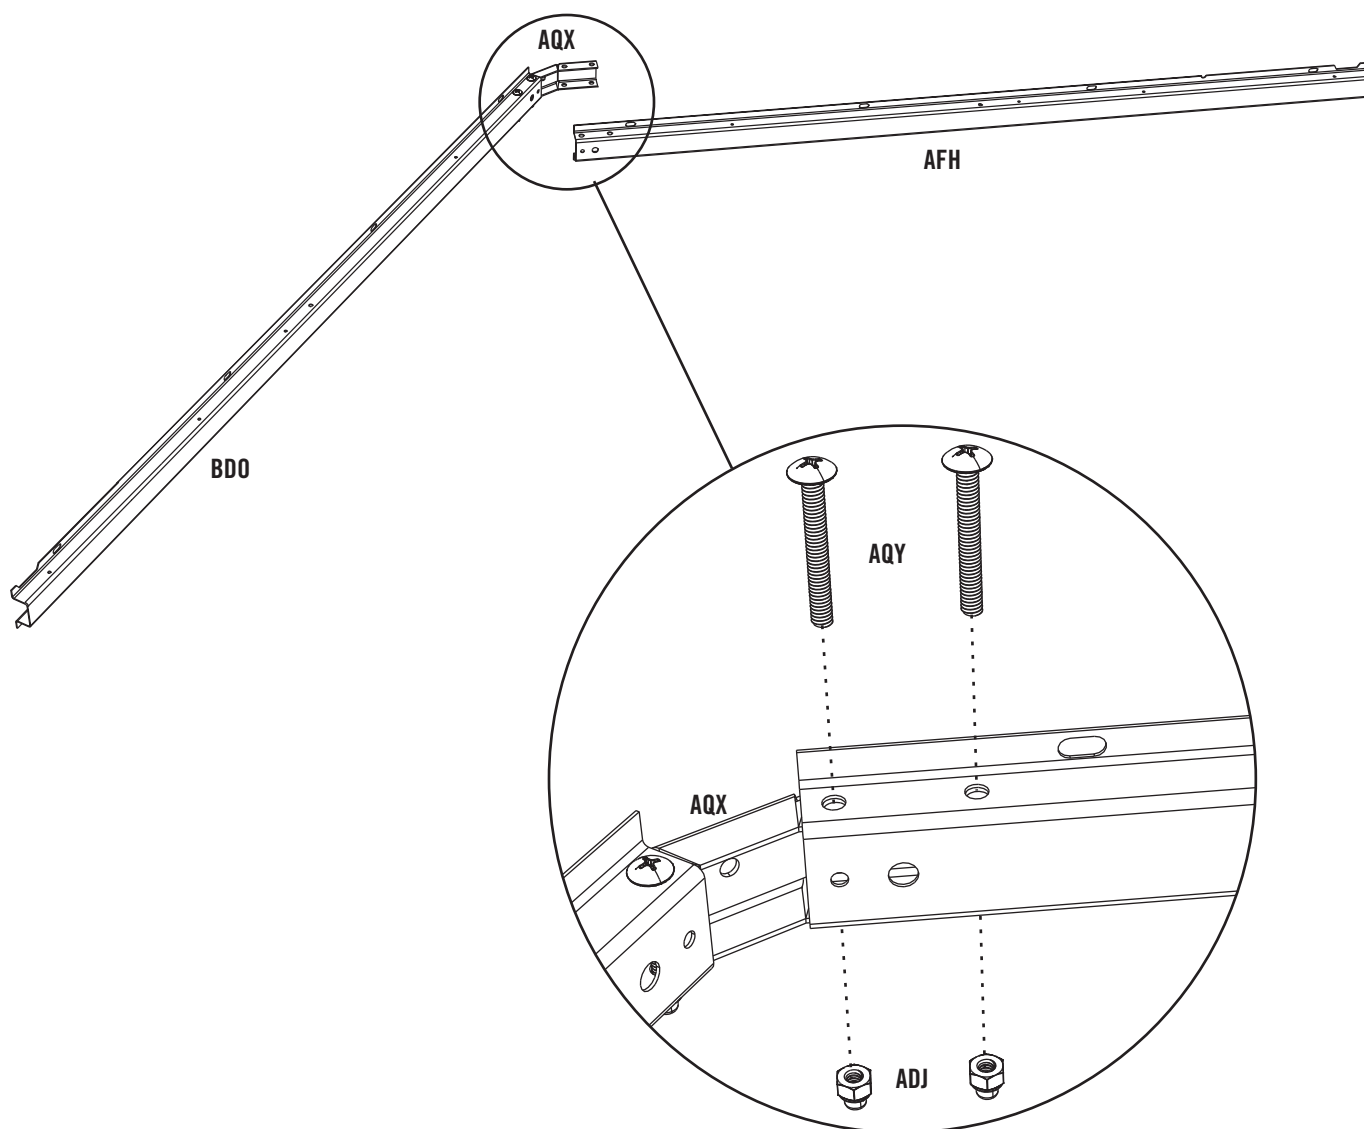




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



3/8"




ADY (x8)



ADK (x8)


SEC 3

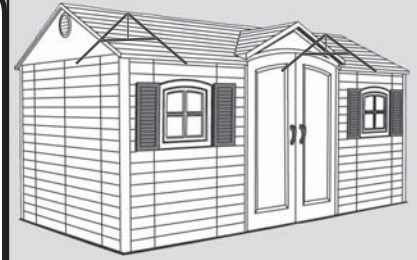

SEC

3.3


With the Truss Assembly on its side, align the holes in a **Roof Truss Brace (AFG)** with those circled in the Truss Gutter Channels as shown.

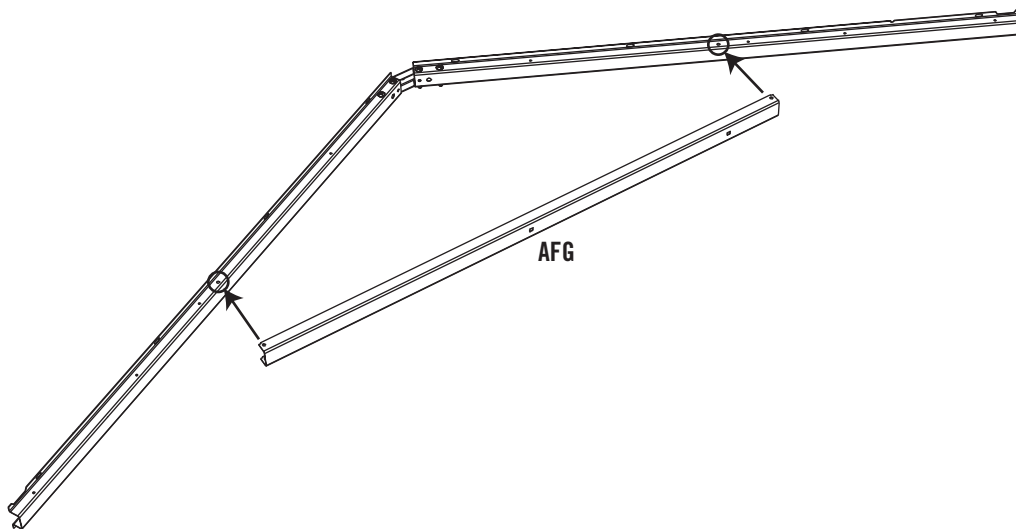

SEC

3.4

Secure the Roof Truss Brace to the Truss Channels using four (4) **#10 x 3/8" Pan-Head Screws (ADY)** and four (4) **#10 Cap Nuts (ADK)**.

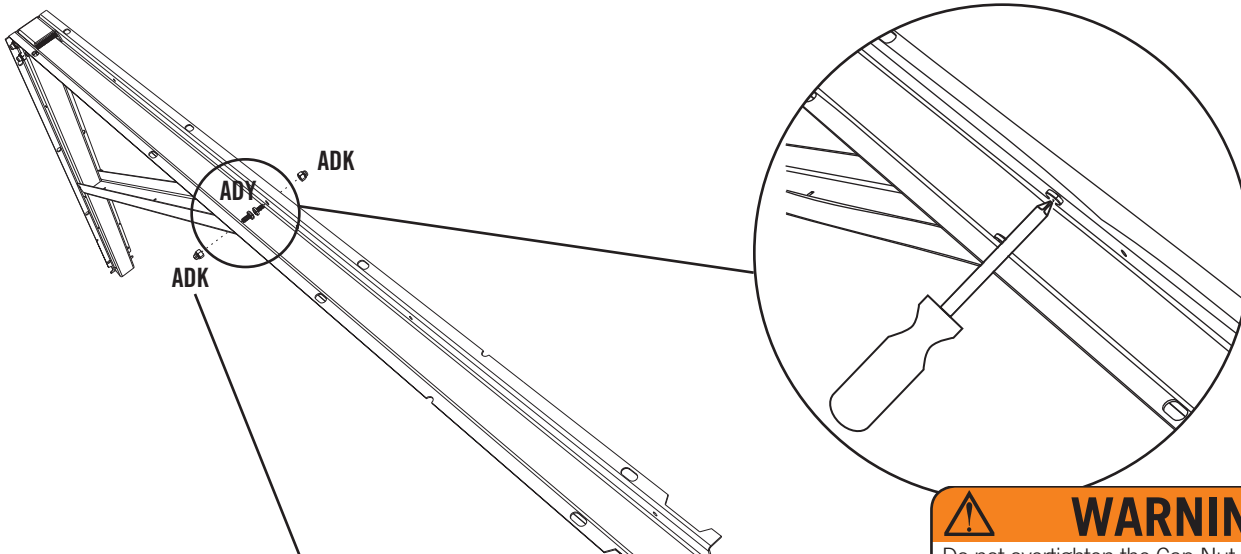

! Note: The Cap Nuts goes on the outside of the Truss.



WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16" (x2)




ADJ (x4)



ADH (x2) (Not to scale)



SEC. 3

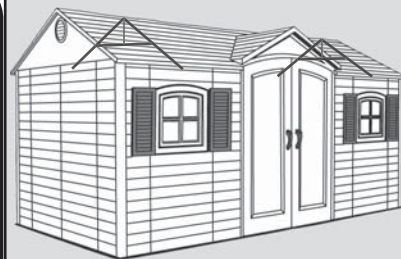

SEC

3.5

With the Truss Assembly still on its side, slide a **1/4" Threaded Rod (ADH)** through the Roof Truss Brace and the Truss Connector as shown. Secure the top and bottom of the 1/4" Threaded Rod with a **1/4" Cap Nut (ADJ)**. Tighten all hardware. The 1/4" Threaded Rod will still spin freely. Set aside. **Repeat previous steps for the second Truss Assembly.**

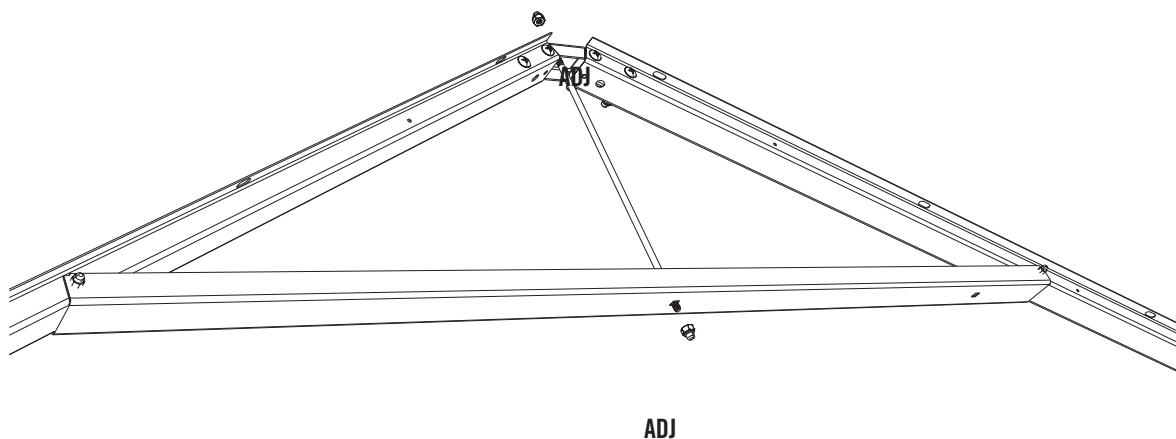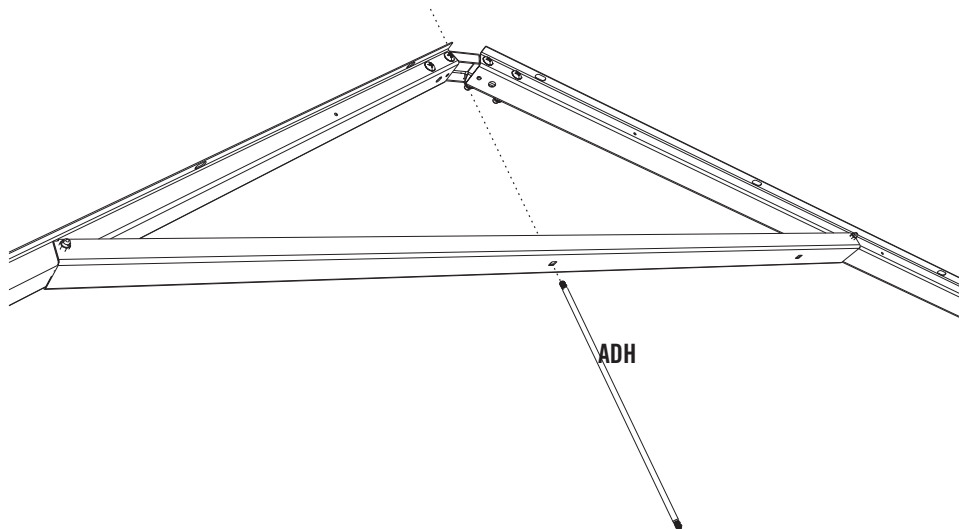


WARNING


Do not overtighten the Cap Nut.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"




AQY (x4)



ADJ (x4)

SEC 3


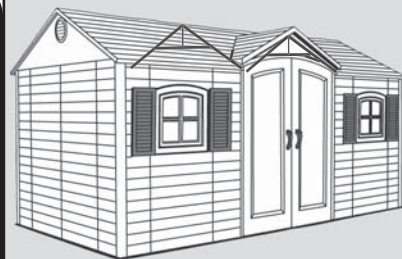


SEC

3.6


SIDE ANGLED TRUSS ASSEMBLY

Stand the **Left Angled Truss Channel (BD0)** upright and set a **Truss Connector (AQX)** inside the end of the Left Angled Truss Channel as shown. Align the holes and secure with two (2) **1/4" x 2" Phillips Truss Screws (AQY)** and two (2) **1/4" Cap Nuts (ADJ)**.

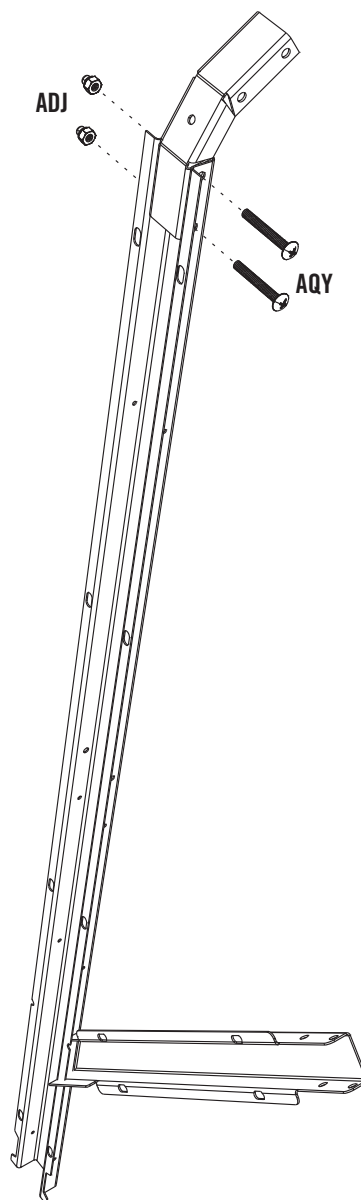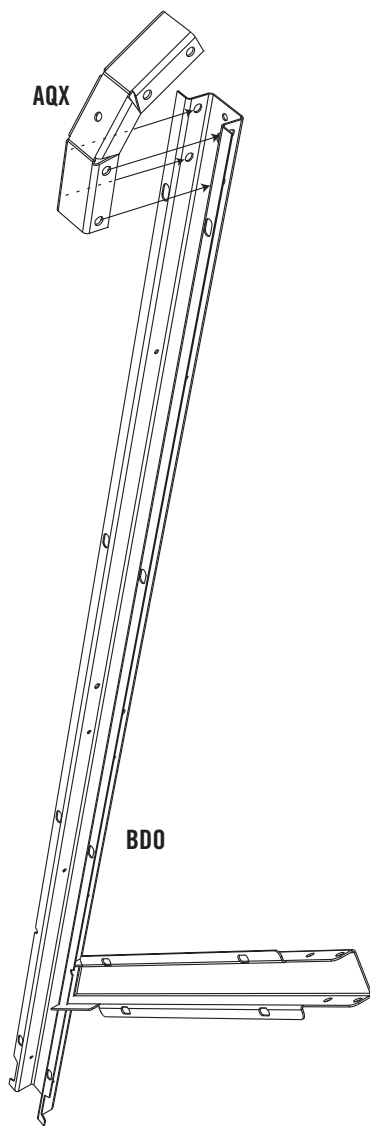




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"



AQY (x4)



ADJ (x4)


SEC. 3



SEC

3.7

Connect a **Truss Gutter Channel (AFH)** to the Truss Connector using two (2) **1/4" x 2" Phillips Truss Screws (AQY)** and two (2) **1/4" Cap Nuts (ADJ)**.


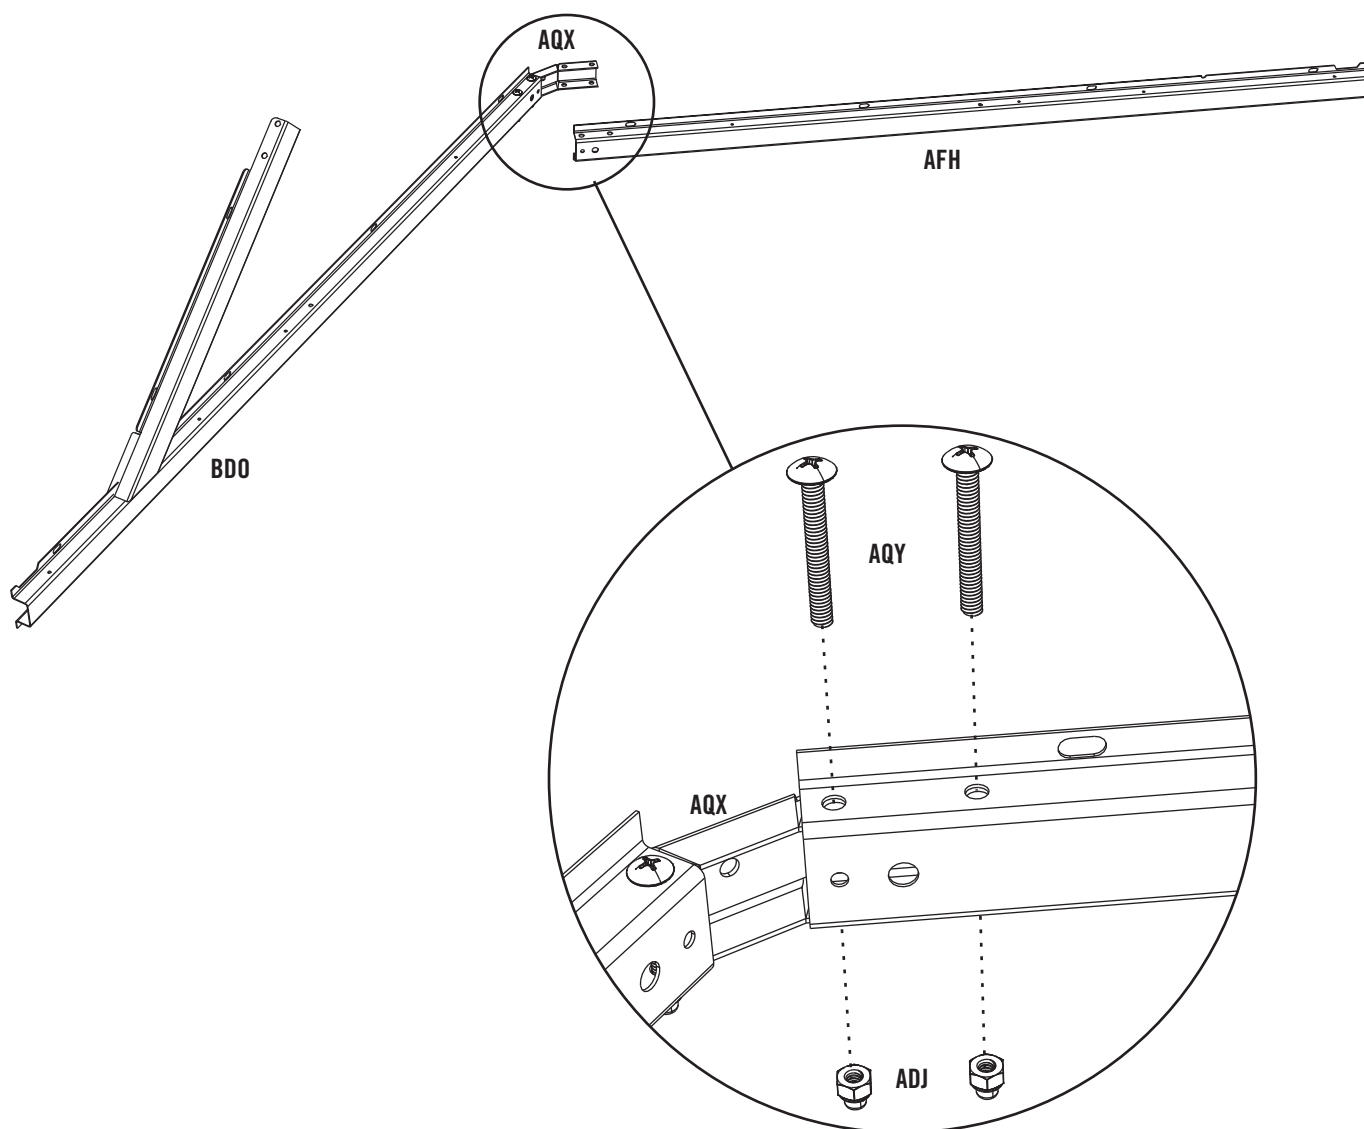




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



3/8"



ADY (x8)



ADK (x8)


SEC 3



SEC

3.8


With the Angled Truss Assembly on its side, align the holes in a **Roof Truss Brace (AFG)** with those circled in the Left Angled Truss Channel and Truss Gutter Channel as shown.

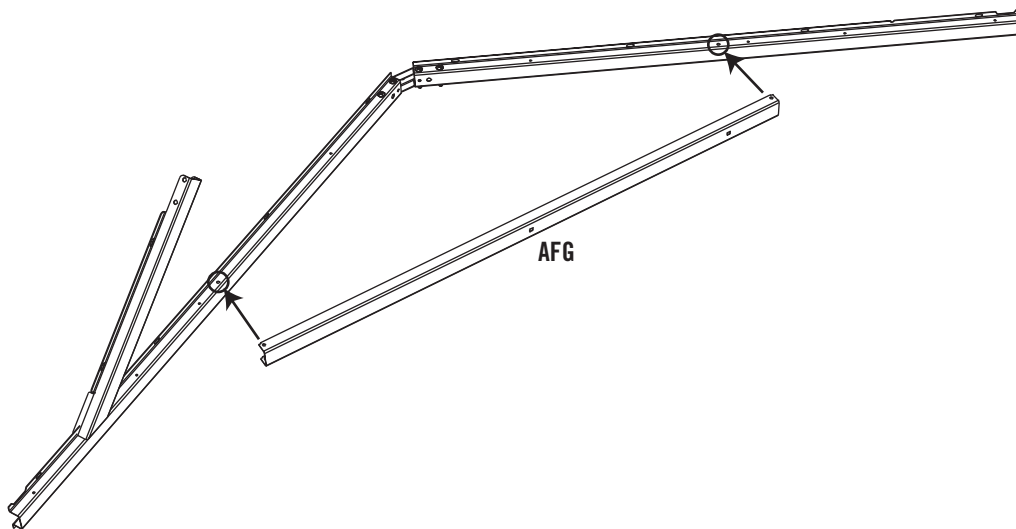

SEC

3.9

Secure the Roof Truss Brace to the Left Angled Truss Channel using two (2) **#10 x 3/8" Pan-Head Screws (ADY)** and two (2) **#10 Cap Nuts (ADK)**. Repeat this step for the other end of the Roof Truss Brace.

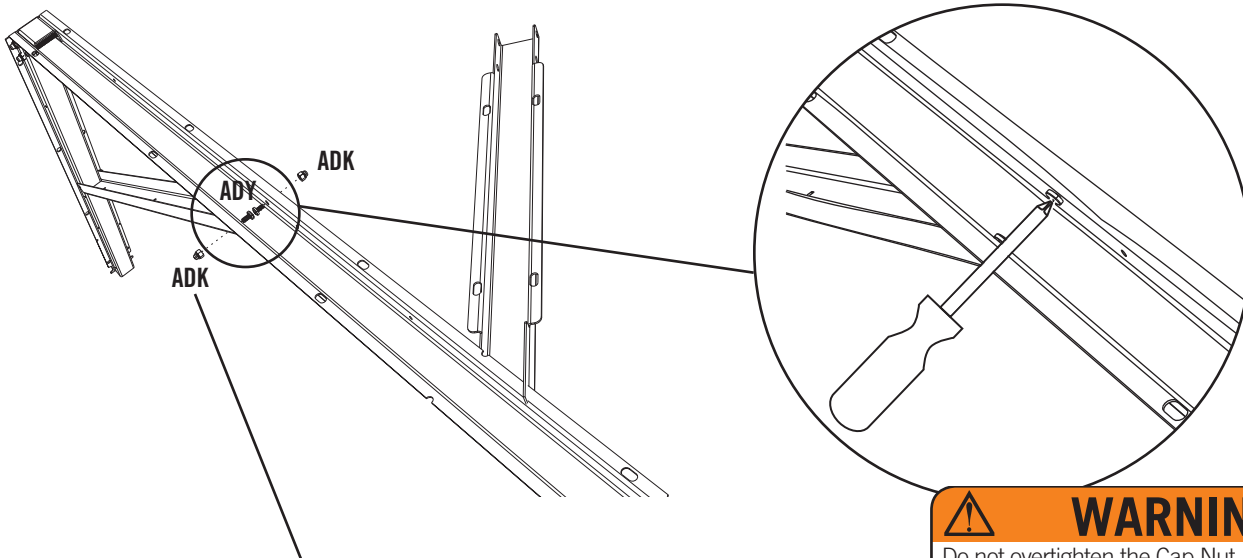

! Note: The Cap Nuts goes on the outside of the Truss.



WARNING

Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16" (x2)




ADJ (x4)



ADH (x2) (Not to scale)



SEC. 3

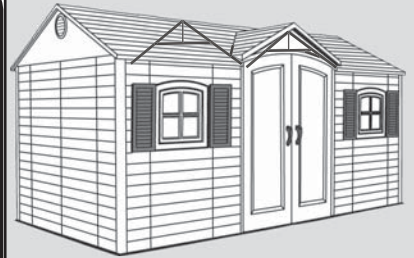

SEC

3.10

With the Angled Truss Assembly on its side, slide a **1/4" Threaded Rod (ADH)** through the Roof Truss Brace and the Truss Connector as shown. Secure the top and bottom of the 1/4" Threaded Rod with a **1/4" Cap Nut (ADJ)**. Tighten all hardware. The 1/4" Threaded Rod will still spin freely. Set aside. **Repeat previous steps for the Right Angled Truss Assembly.**

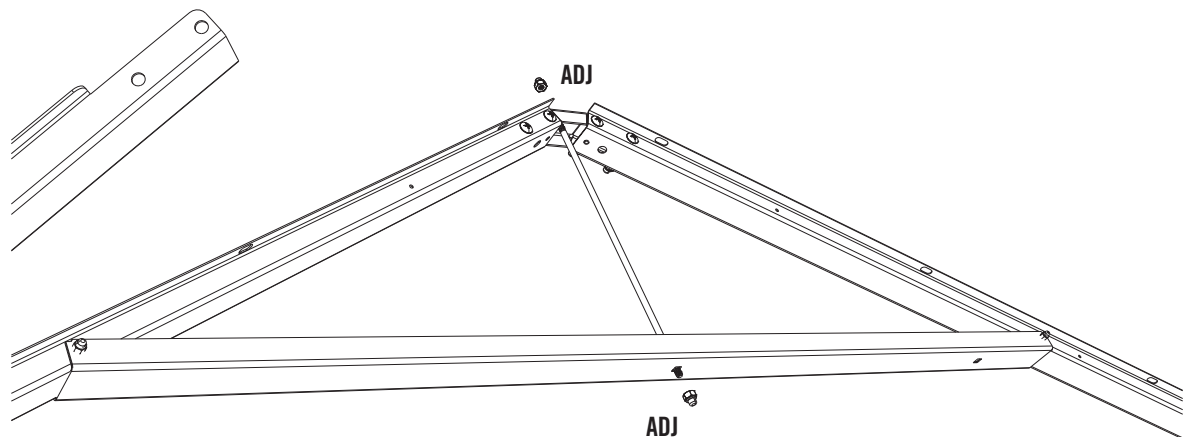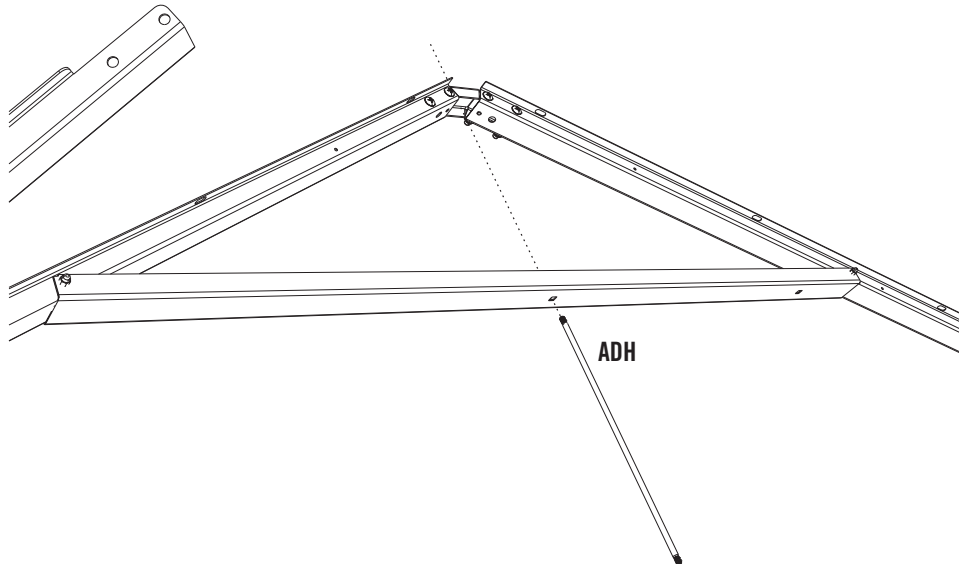


WARNING

Do not overtighten the Cap Nut.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




7/16"




ADJ (x4)

AQY (x4)



SEC 3

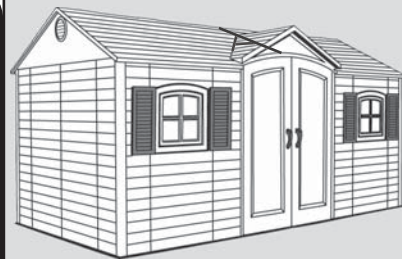


SEC

3.11

CENTER ANGLED TRUSS ASSEMBLY

Attach a **Truss Connector (AQX)** to the **Center Angled Truss Channel (BDQ)** using the hardware shown.

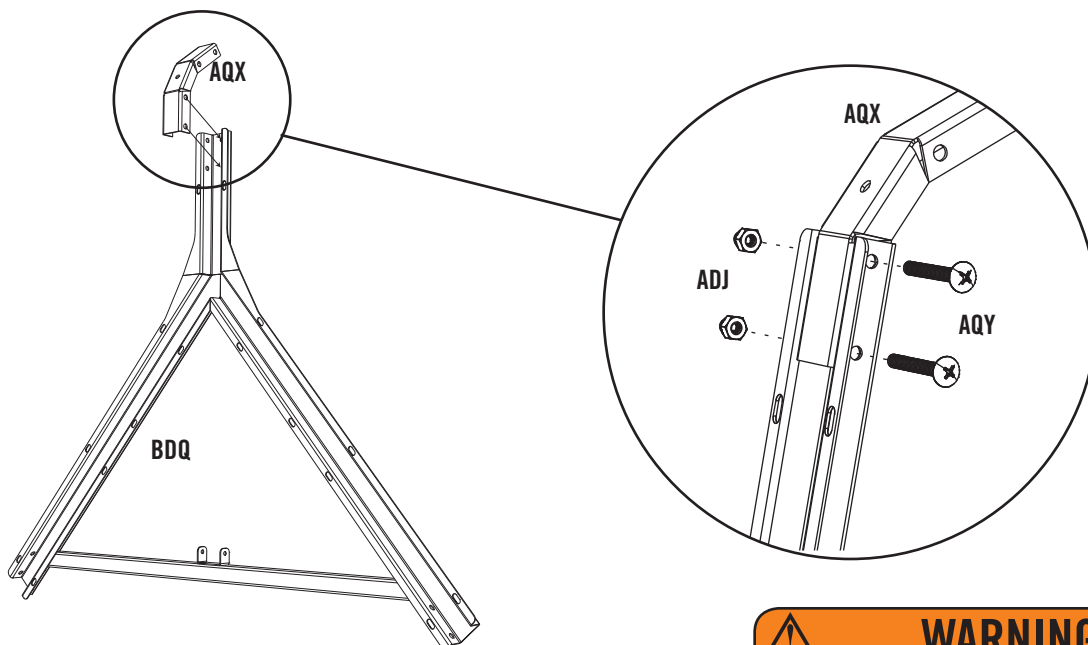


WARNING

Do not overtighten the Cap Nut.

SEC

3.12

Attach a **Truss Gutter Channel (AFH)** to the Truss Connector using the hardware shown.

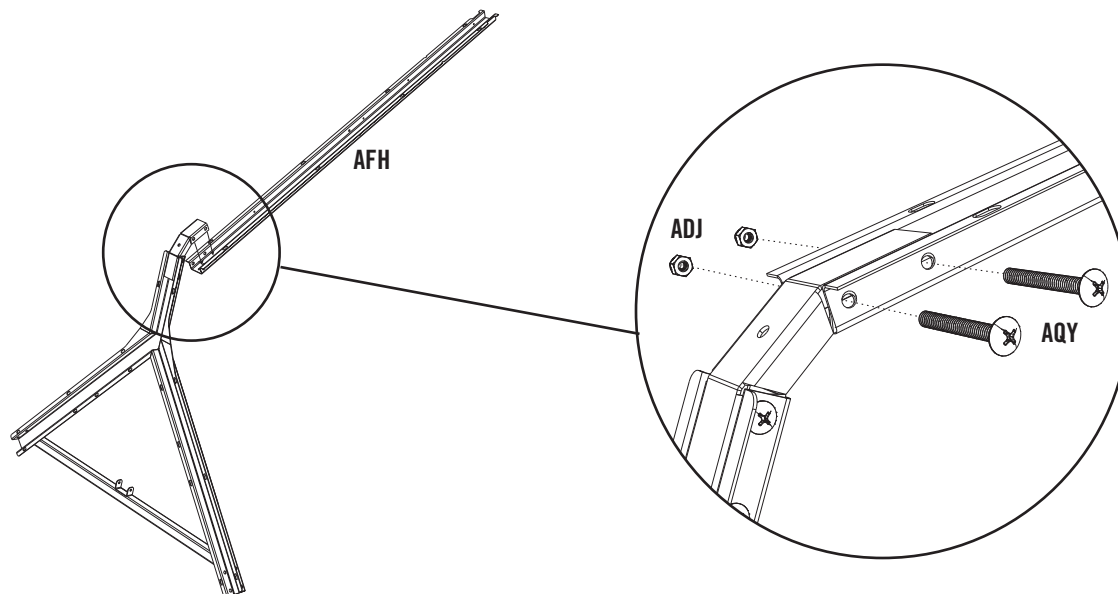





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

SEC. 3




3/8"



ADY (x4)




ADK (x4)

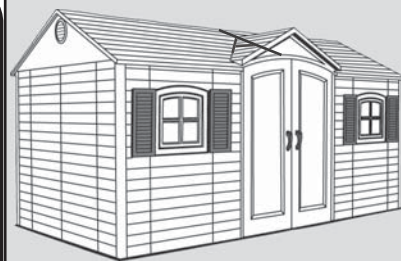

SEC

3.13

Align the hole in the Roof Truss Brace with that circled on the Truss Gutter Channel in the image below. Attach a **Roof Truss Brace (AFG)** to the Center Truss Assembly using the hardware shown.

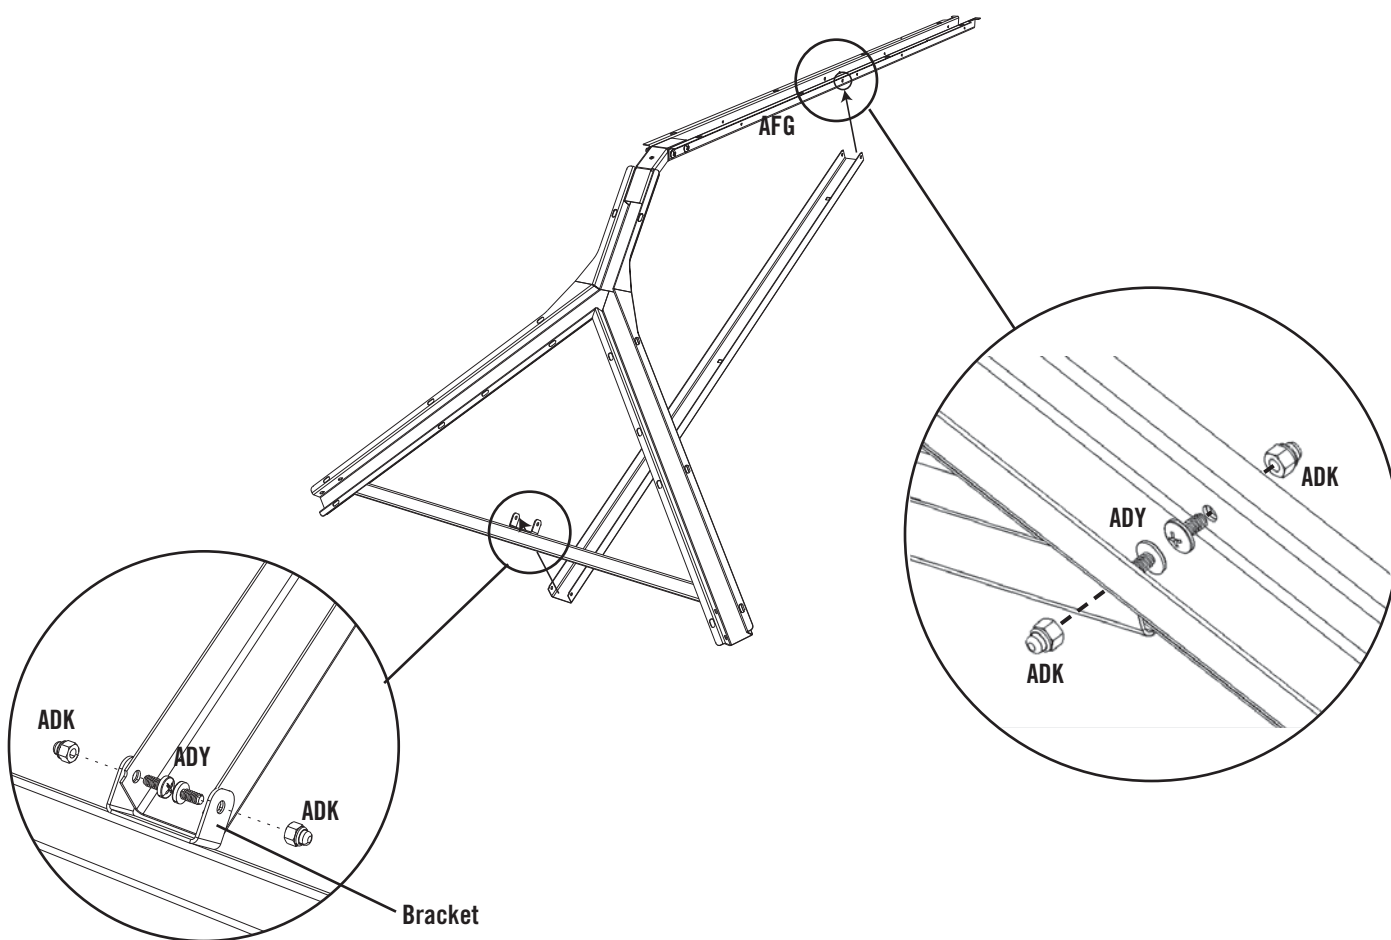

Note: The Roof Truss Brace goes inside the bracket.




WARNING


Do not overtighten the Cap Nut.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16" (x2)




ADJ (x2)



ADH (x1) (Not to scale)



SEC 3

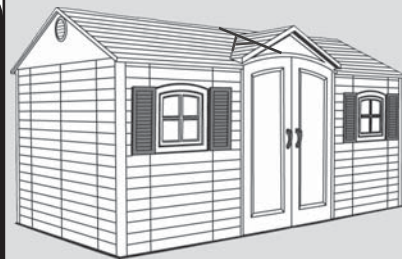

SEC

3.14

Insert a **1/4" Threaded Rod (ADH)** through the Roof Truss Brace and Truss Connector as shown. Ensure channels are parallel, then secure with **1/4" Cap Nuts (ADJ)**. Tighten all hardware. The 1/4" Threaded Rod will still spin freely. Set aside.

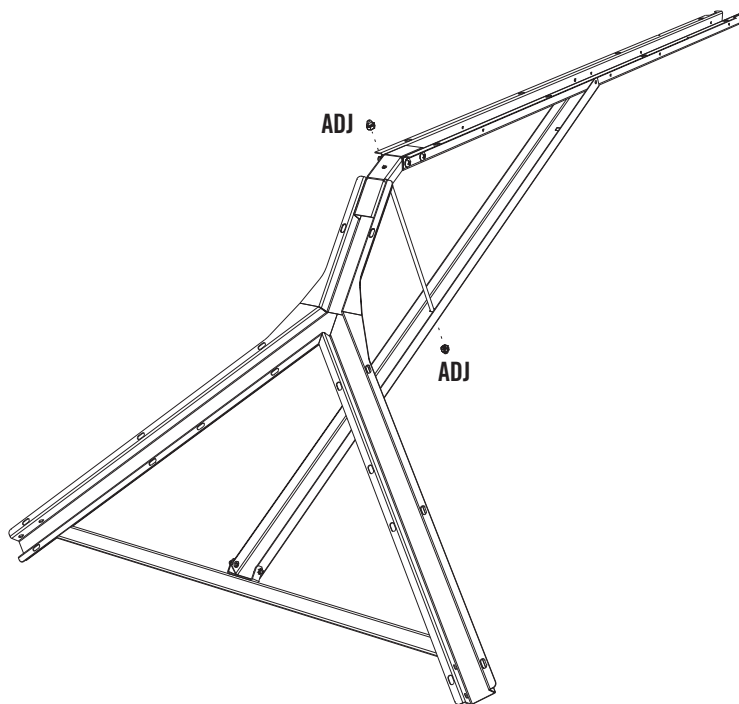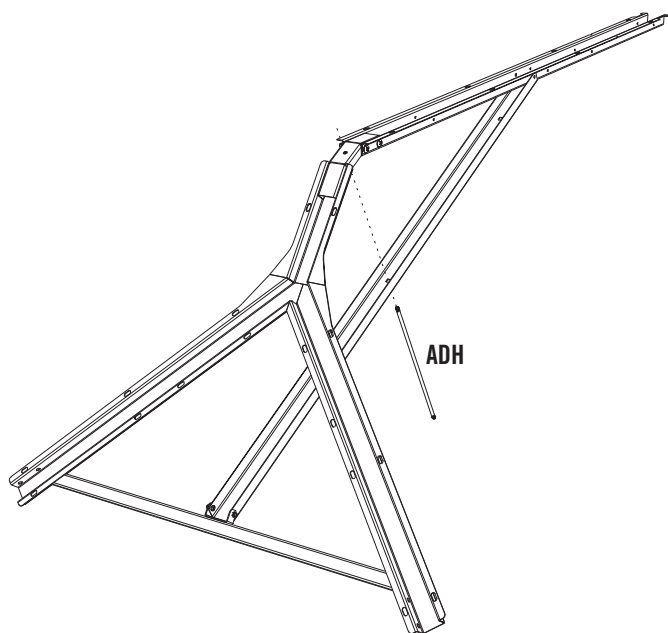


WARNING

Do not overtighten the Cap Nut.

SEC 4 WALL PANEL INSTALLATION

HARDWARE REQUIRED



Hardware shown at actual size



ADZ (x100)
1/4" x 5/8" Pan-Head Screw
(Not all screws will be used)

METAL PARTS REQUIRED




Part shown at 8% of actual size



AFM (x2)
Wall Support Channel

PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

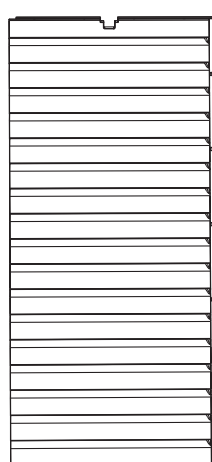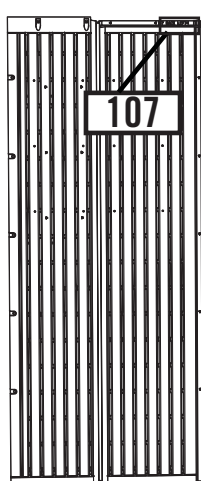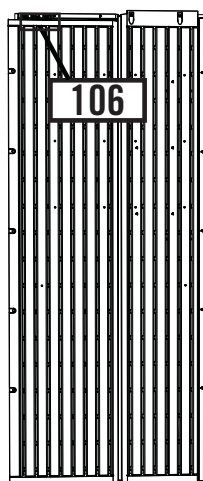

AGW (x2) **AGL** (x2)
Corner Wall Panel 106 Corner Wall Panel 107

AHD (x9)
Wall Panel


AHH (x2)
Window Wall Panel



Note: Pay no attention to the imprinting of "Left" or "Right" on the Corner Wall Panels.




CKN (x1)
Right Half-Wall Panel




CKL (x1)
Left Half-Wall Panel

TOOLS REQUIRED



Phillips Screwdriver





Safety Glasses




AIW (x1)
Wood Block (Included)



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AIW (x1)
Wood Block



ADZ (x2)

SEC

4





SEC

4.1

WALL PANEL INSTALLATION

Fold a **Corner Wall Panel 107 (AGL)**. Fit tabs of Panel into the front, left corner of your Floor (while facing shed). Place a **Wood Block (AIW)** under floor panel, directly under the first tab, then pull down on the Corner Panel until the tab snaps into place. Move the Wood Block under the next tab and repeat.

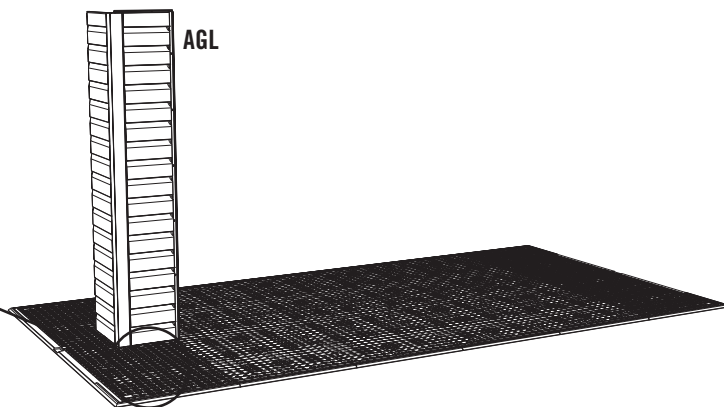
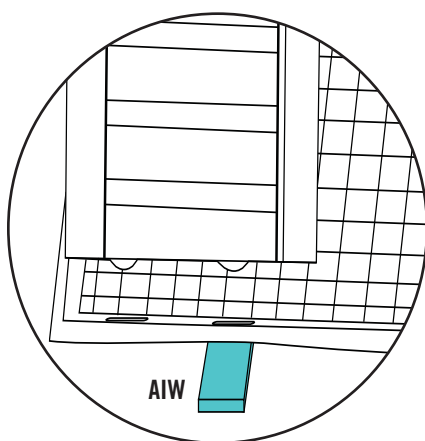


Note: Place the Wood Block (AIW) directly under the tabs as you insert them throughout the assembly. Snap tabs into place one at a time.

SEC

4.2



Snap **Wall Panels (AHD)** into place along the left side of the shed. Ensure the tops of the Wall Panels are even and the holes align. Use one (1) **1/4" x 5/8" Pan-Head Screw (ADZ)** to fasten the top of the Panels together as shown. You'll finish fastening the panels together towards the end of this section.

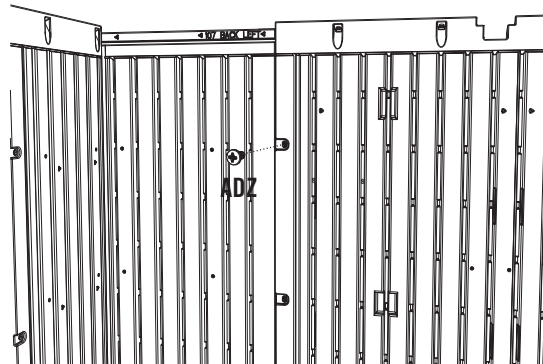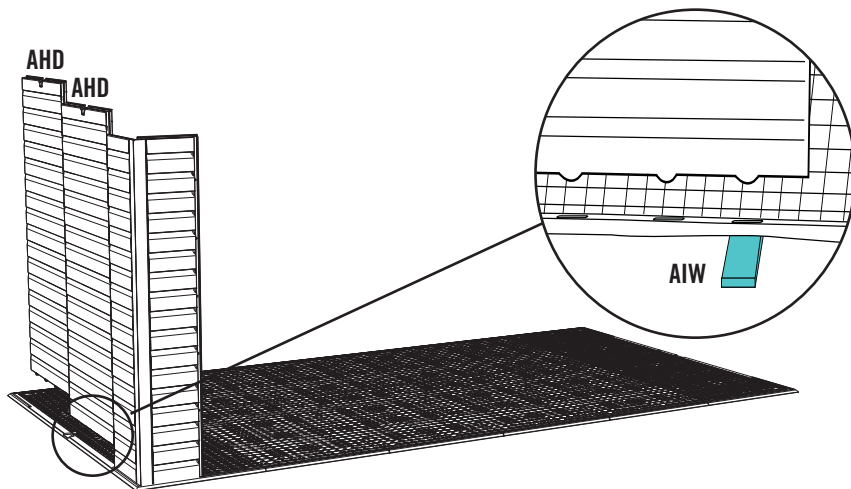

Note: A second person should apply pressure on opposite side of the Wall Panels for easier insertion of the Screw. Do not overtighten Screw.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AIW (x1)
Wood Block





SEC. 4

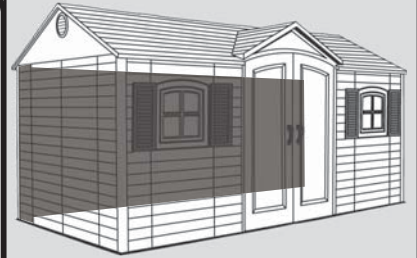

SEC

4.3



Fold a **Corner Wall Panel 106 (AGW)**. Snap into place and fasten at the top hole with the required hardware.

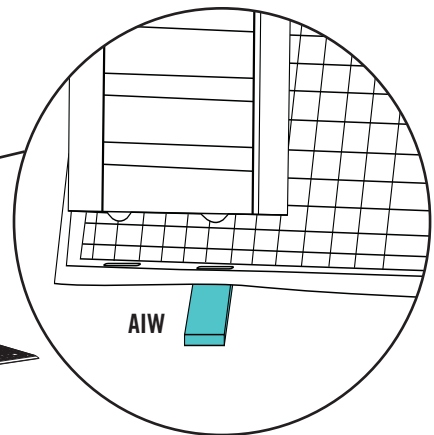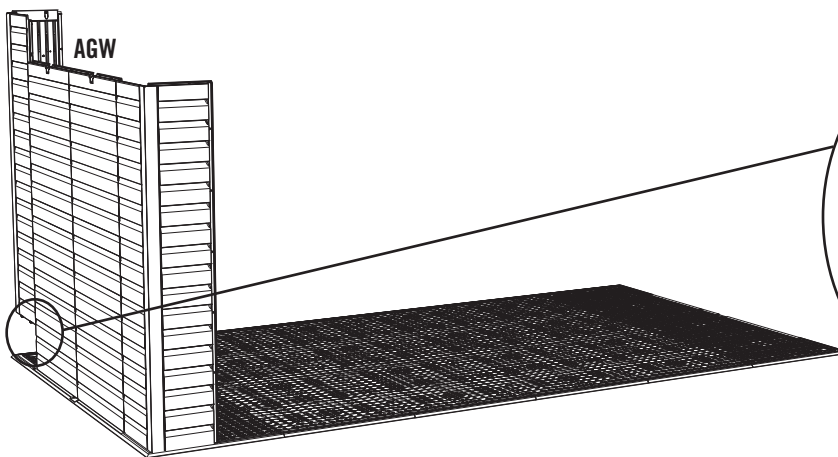

SEC



4.4

Insert five **Wall Panels (AHD)** along the back side of Floor. Align the holes and fasten the Panels at the top hole with the required hardware.

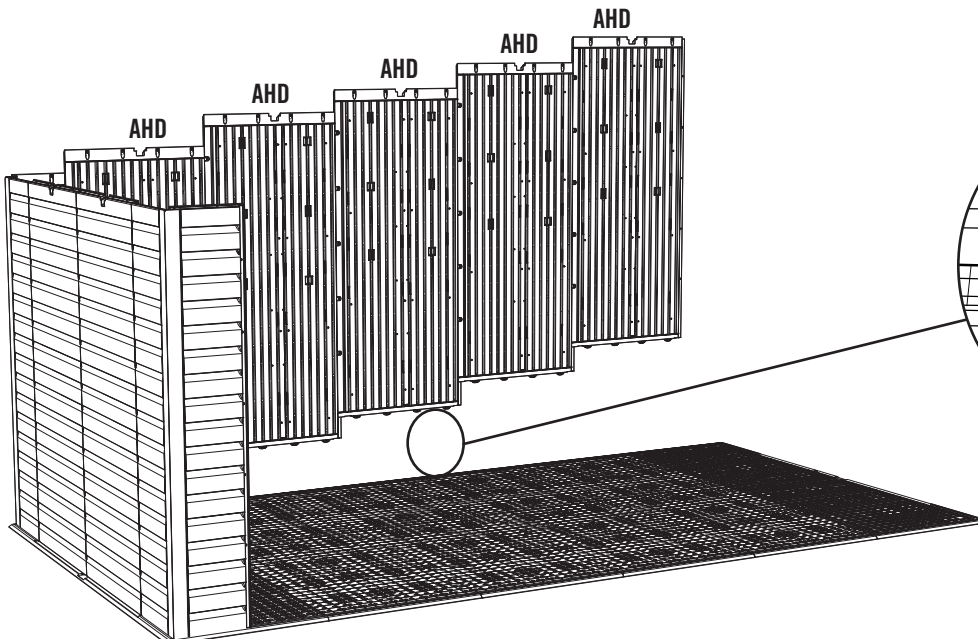



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AIW (x1)
Wood Block



SEC



4

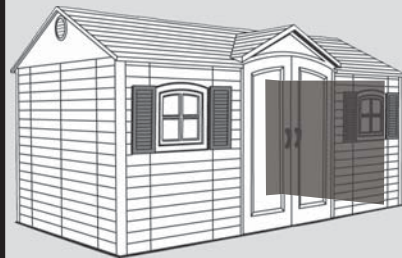

SEC

4.5


Fold a **Corner Wall Panel 107 (AGL)** and fasten to the rear Wall Panel in the top hole using the required hardware.

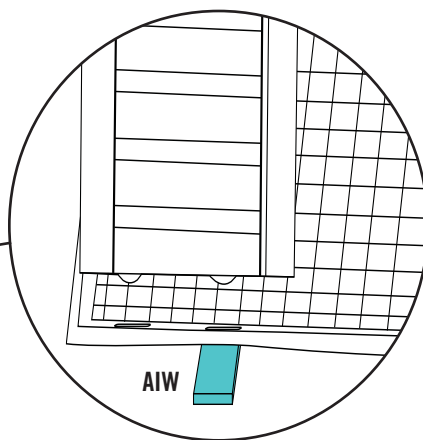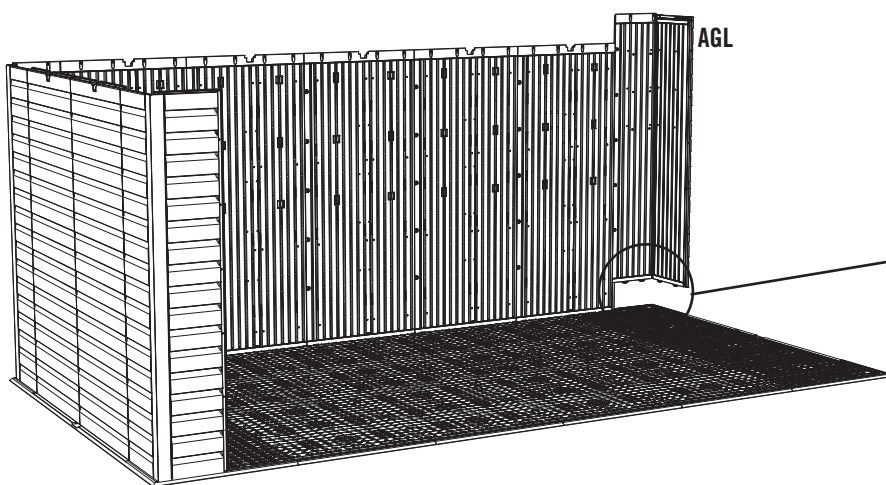

SEC



4.6

Snap two **Wall Panels (AHD)** into place along the right side of the shed. Ensure the tops of the Wall Panels are even and the holes align. Use one (1) **1/4" x 5/8" Pan-Head Screw (ADZ)** to fasten the top of the Panels together as shown.

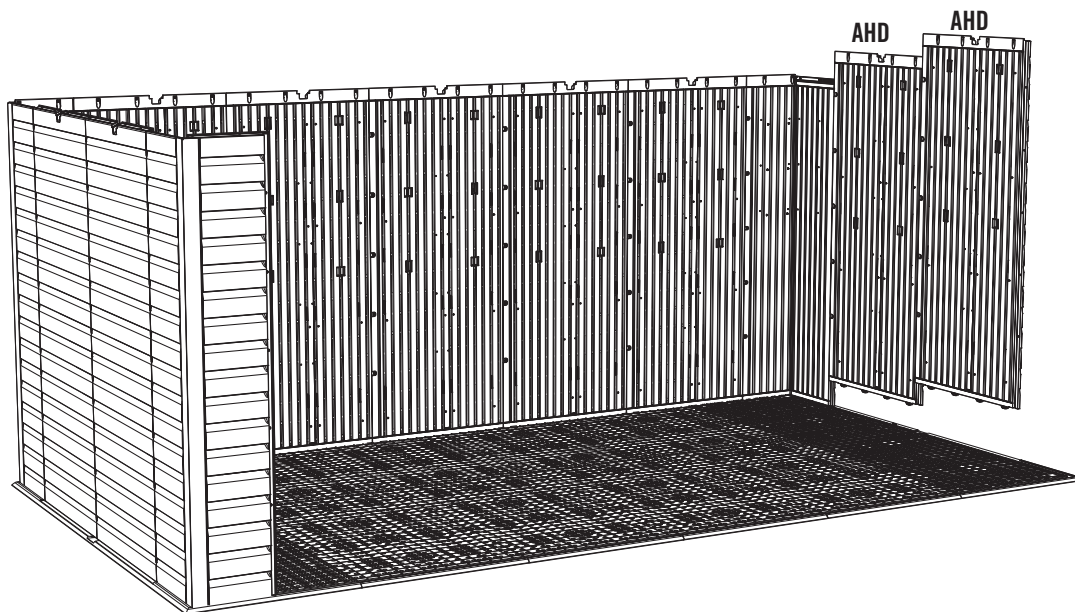



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AIW (x1)
Wood Block




SEC. 4



SEC

4.7


Fold the second **Corner Wall Panel 106 (AGW)** and snap it into place at the right, front corner of the Floor as shown. Fasten it to the Wall Panel in the top hole using the required hardware.

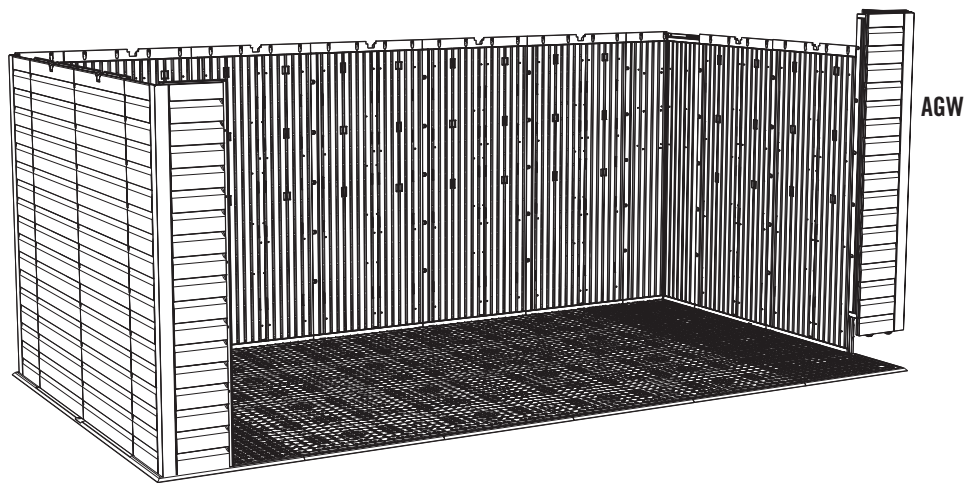

SEC



4.8

Snap a **Window Wall Panel (AHH)** into place next to the two Front Corner Wall Panels as shown. After aligning the holes, fasten the Panels to the Corner Wall Panels using the required hardware.

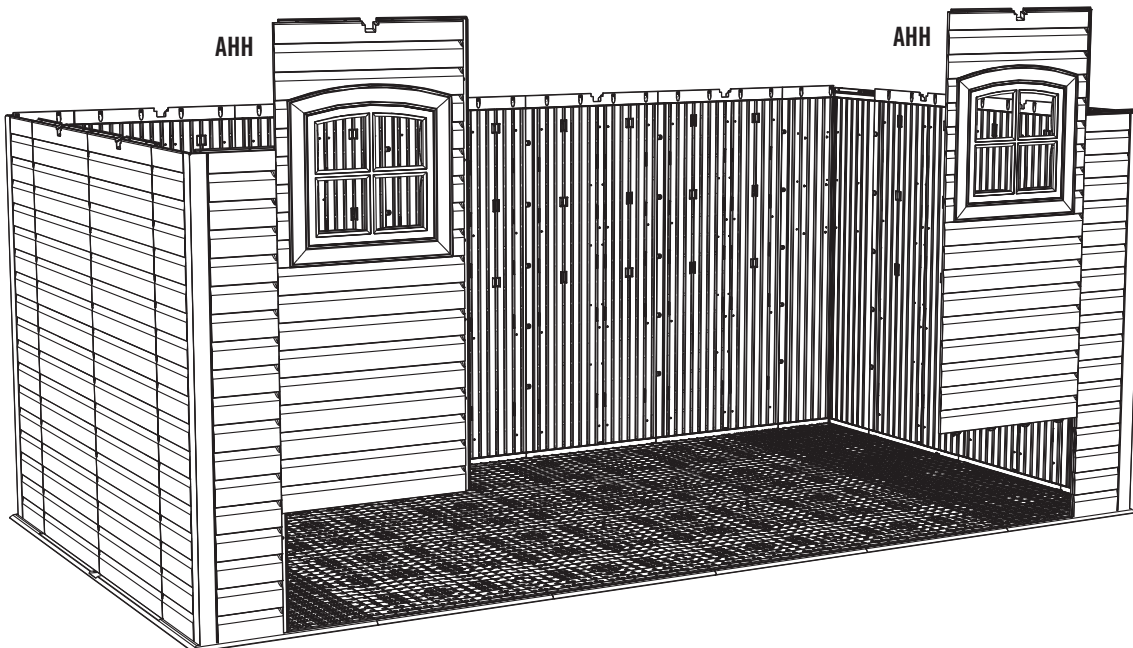




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AIW (x1)
Wood Block



ADZ (x74)

SEC

4

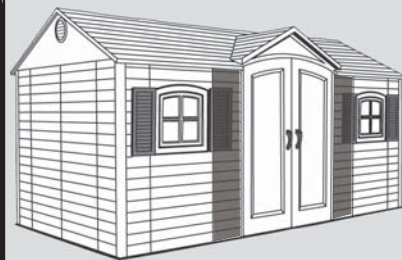


SEC

4.9

.....

Snap the **Left** and **Right Half-Wall Panels (CKK & CKN)** next to the two Window Wall Panels as shown. After aligning the holes, fasten the Panels with the required hardware. Finish fastening all Panels together for a total of five **1/4" x 5/8" Pan-Head Screws (ADZ)** per joint.



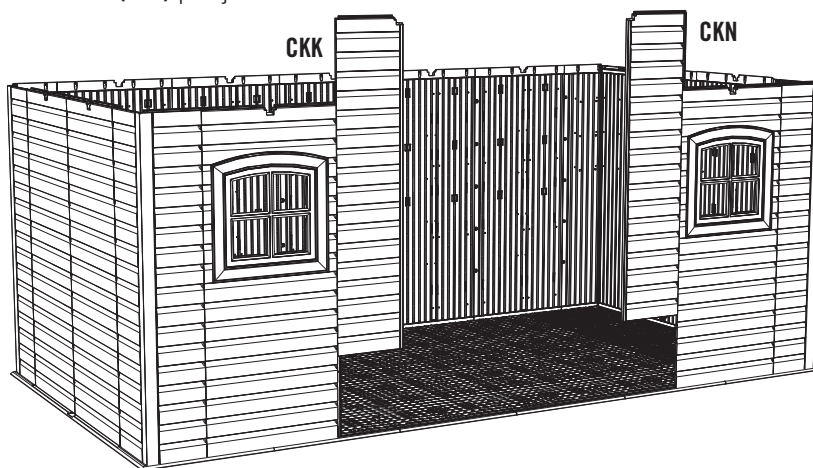


SEC

4.10

.....


Attach a **Wall Support Channel (AFM)** to the Left and Right Half-Wall Panels (use the first groove in from the edge, and secure with four (4) **1/4" x 5/8" Pan-Head Screws (ADZ)** per Channel.

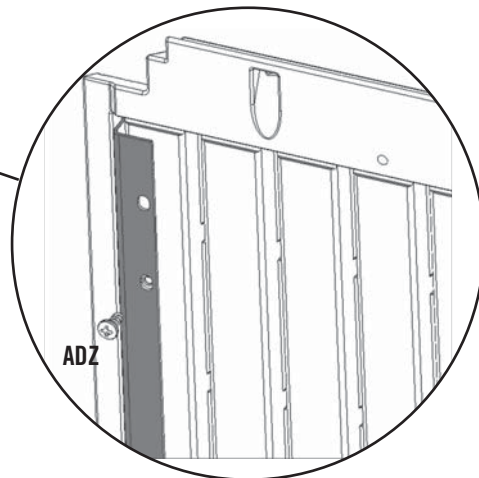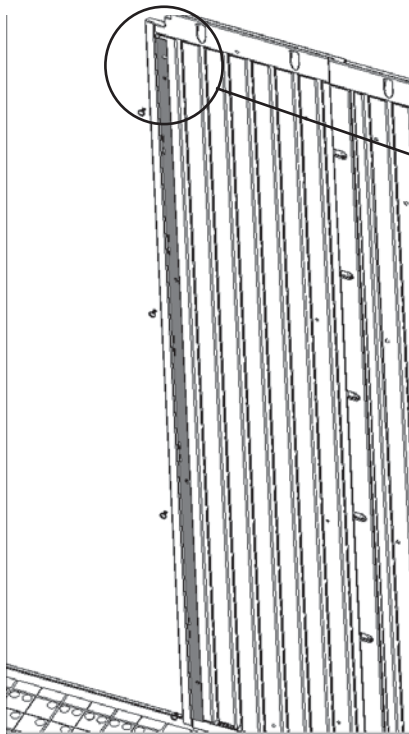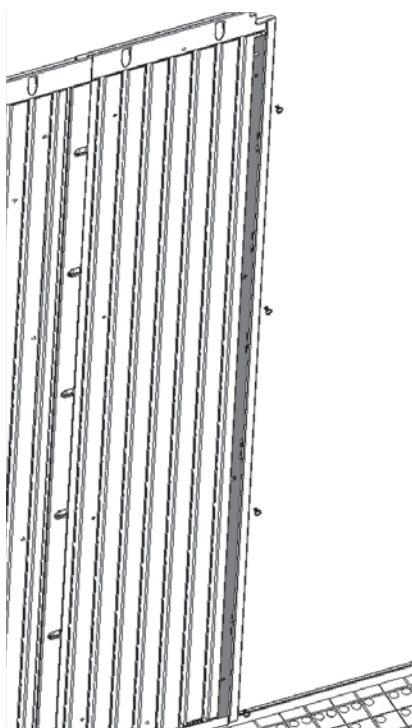


SEC 5 GABLE ASSEMBLY

HARDWARE REQUIRED


Hardware shown at actual size




AEE (x10)
#10 x 1/2" Flat Washer




ADW (x10)
#10 x 3/4" Pan-Head Screw




ADZ (x8)
1/4" x 5/8" Pan-Head Screw



ADV (x16)
1/4" x 1 1/8" Pan-Head Screw
(Only four are used)




AHS (x6)
End Plug
(Only two are used)




ACB (x2)
#10 x 1 1/4" Pan-Head Screw
(Not used in this model)

Parts shown at 8% of actual size



AGP (x2)
Louvered Vent




AIQ (x2)
Vent Screen

METAL PARTS REQUIRED

Parts shown at 8% of actual size




BDD (x1) Entry Gable Header Bar




PLASTIC PARTS REQUIRED

Parts shown at 4% of actual size

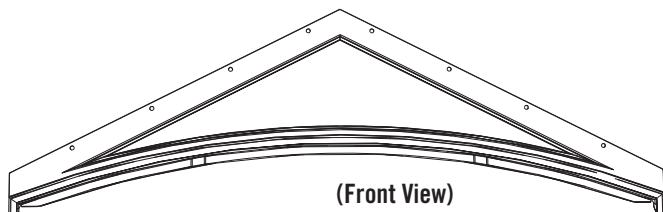

BDC (x1)
Front Entry Gable

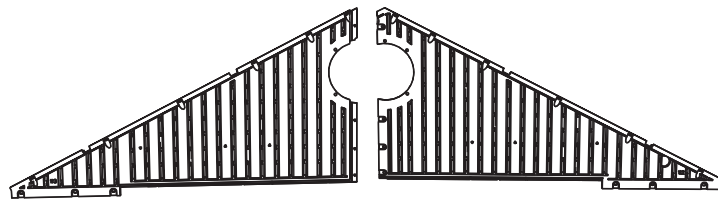

AGH (x2)
Side Gable 1

(Rear View)

AGI (x2)
Side Gable 2

(Rear View)

TOOLS REQUIRED




Phillips Screwdriver



Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x8)

SEC 5

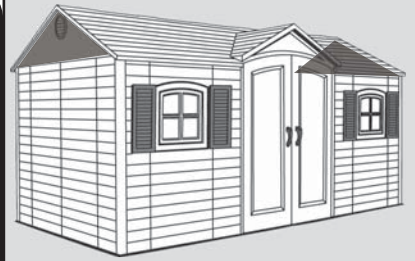


SEC

5.1

SIDE GABLE ASSEMBLY


Lay the edge of **Side Gable 2 (AGI)** over **Side Gable 1 (AGH)** as shown, and align the four holes.

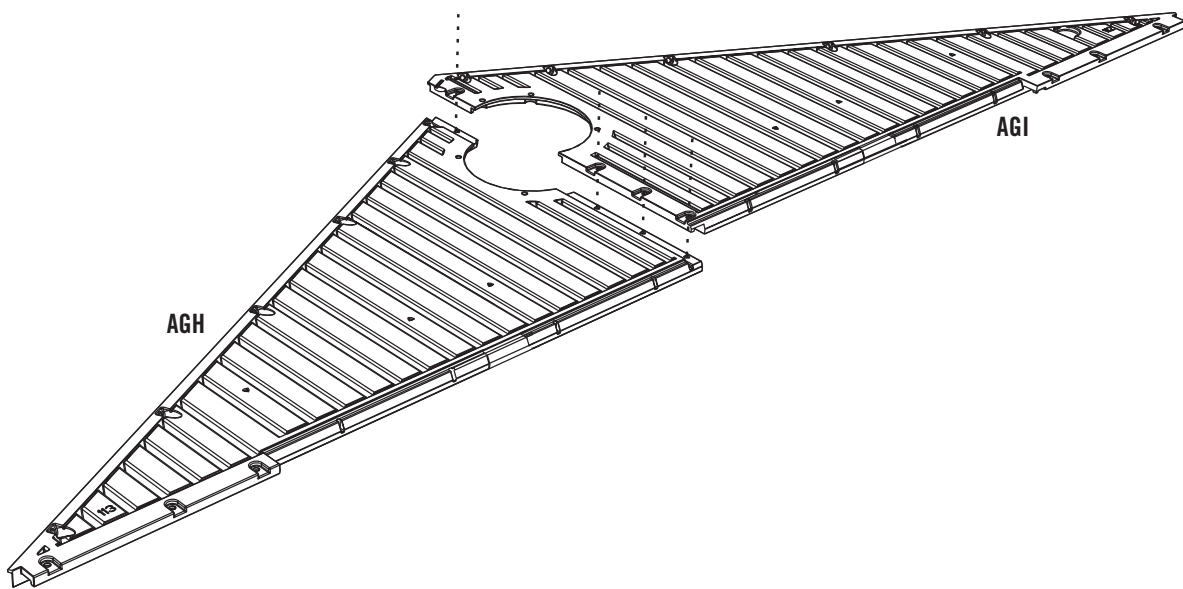

SEC

5.2


Connect Side Gables 1 & 2 together using four (4) **1/4" x 5/8" Pan-Head Screws (ADZ)** as shown.

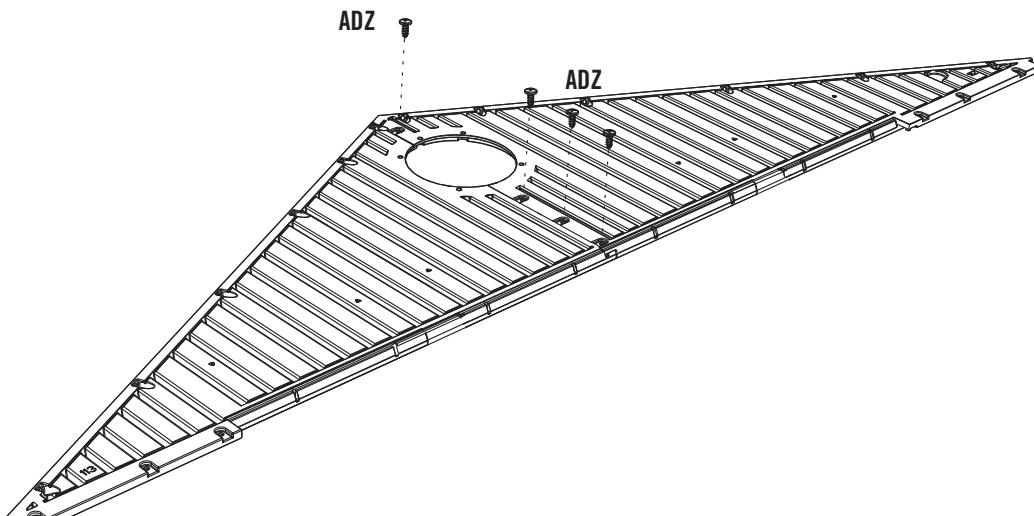


Note: Only use a hand screwdriver in this step.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADW (x10)



AEE (x10)


SEC 5



SEC

5.3


Lay Side Gable Assembly flat on the ground over the **Vent Screen (AIQ)** and **Louvered Vent (AGP)**. Align the holes in the Louvered Vent with those in the Side Gable Assembly.

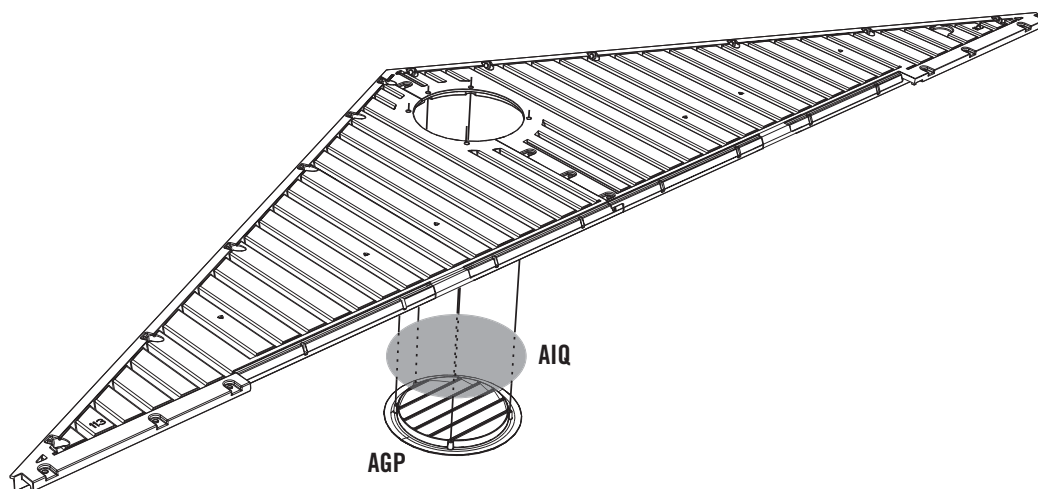

SEC

5.4

After aligning the holes, press down firmly on the Side Gable Assembly when inserting the five (5) **#10 x 3/4" Pan-Head Screws (ADW)** and the five (5) **#10 x 1/2" Flat Washers (AEE)**. Pressing down firmly while inserting the Screws will help prevent the Vent Screen from twisting while inserting the Screws. **Repeat the previous steps for the second Side Gable.**

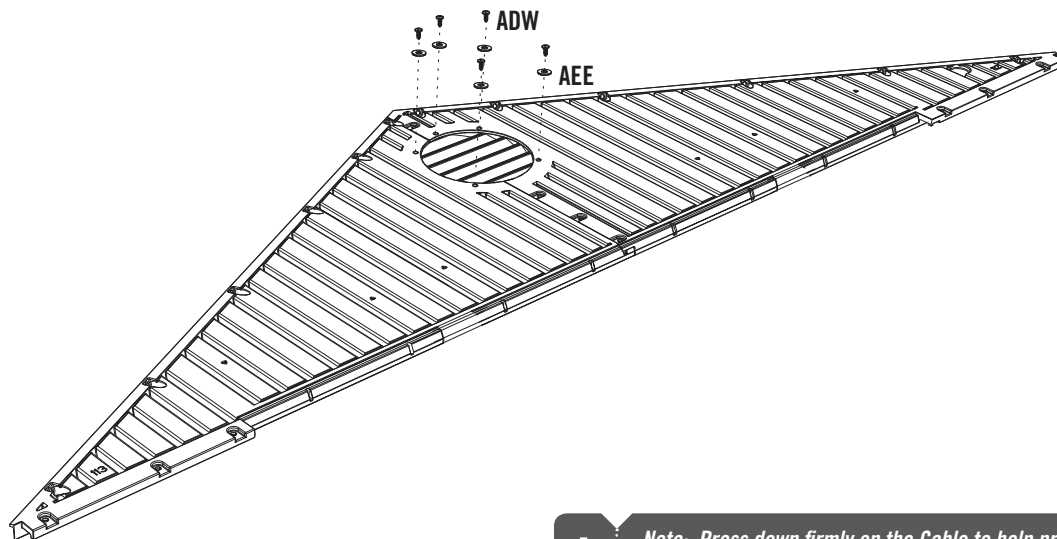


Note: Only use a hand screwdriver in this step.




Note: Press down firmly on the Gable to help prevent the Screen from twisting while inserting the Screws.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AHS (x2)



ADV (x4)

SEC 5

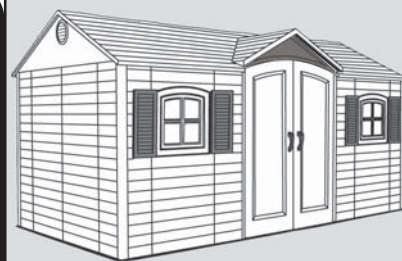


SEC

5.5

ENTRY GABLE ASSEMBLY

Insert one **End Plug (AHS)** into each end of the **Entry Gable Header Bar (BDD)** as shown, and align the four holes in the Entry Gable Header Bar with those in the **Front Entry Gable (BDC)**.

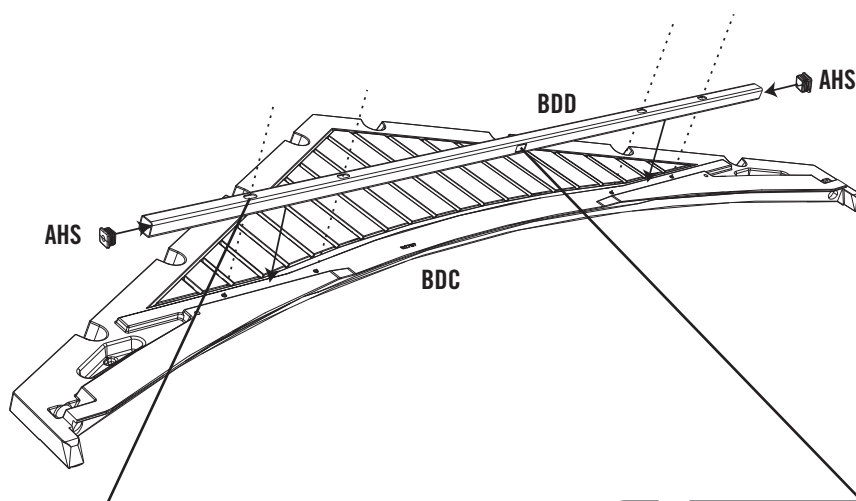

Note: The flat, oval holes face away from the Gable.




Note: The flat, square holes faces downward.

SEC

5.6

Attach the Entry Gable Header Bar to the Front Entry Gable using four (4) **1/4" x 1 1/8" Pan-Head Screws (ADV)**. Set aside.

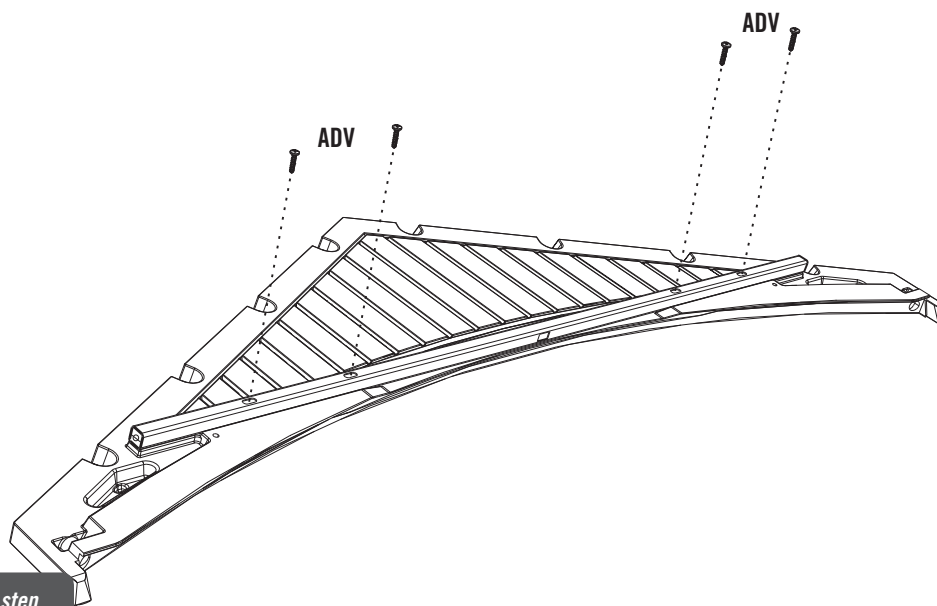


Note: Only use a hand screwdriver in this step.


SEC 6 LEFT DOOR ASSEMBLY

HARDWARE REQUIRED

Hardware shown at actual size



ADW (x3)
#10 x 3/4" Pan-Head Screw



ABU (x2)
1/4" x 1 1/2" Carriage Bolt



ADJ (x2)
1/4" Cap Nut




AEE (x3)
#10 x 1/2 Flat Washer

Part shown at 25% of actual size



AHM (x2)
Deadbolt Latch



AIB (x1)
Left Door Strike Plate



AIA (x1)
Left Door Lock Bracket

Part shown at 15% of actual size




AHZ (x1)
Left Door Handle

METAL PARTS REQUIRED

Part shown at 8% of actual size




AFC (x1)
Door End Channel



PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

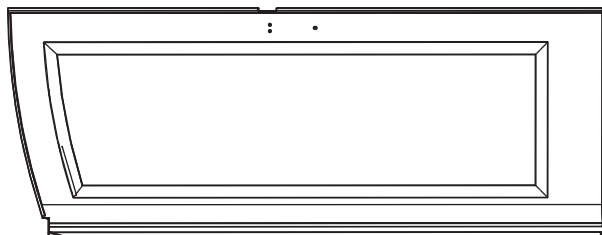


BDJ (x1)
Left Front Door (Notched)


TOOLS REQUIRED



Phillips Screwdriver




7/16" Wrench



Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AHM (x2)

SEC 6

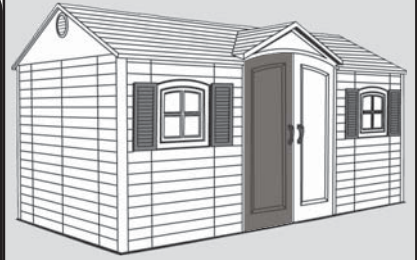


SEC

6.1

LEFT DOOR ASSEMBLY

Rest the **Left Shed Door (Notched) (BDJ)** with front side down. Position the **Deadbolt Latches (AHM)** in slots at the top and bottom of the Door, then slide the **Door End Channel (AFC)** onto the Door as shown.

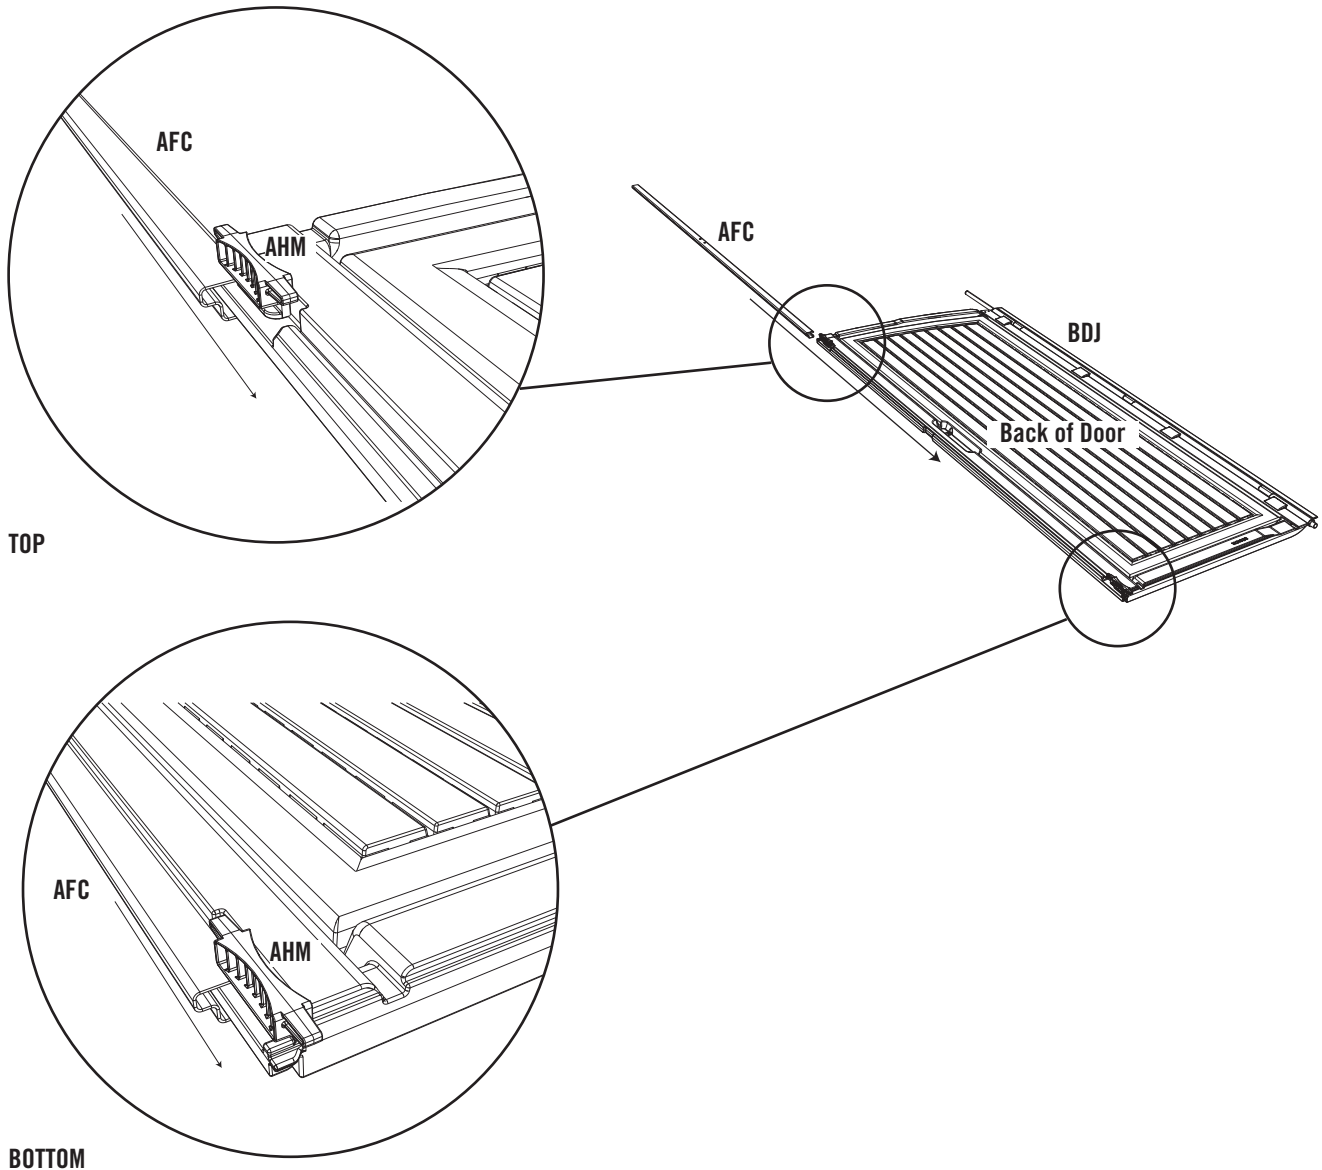


Note: The Door End Channel fits onto Door with the flat side up (facing the Deadbolt Latches).




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"



AIB (x1)




ABU (x2)



ADJ (x2)



AIA (x1)

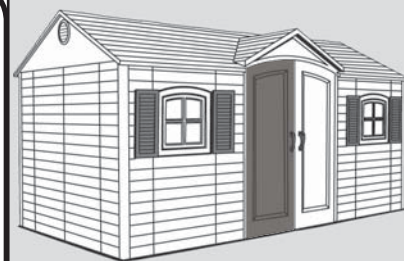


SEC. 6

SEC

6.2

Slip the **Left Door Strike Plate (AIB)** over the Left Shed Door and align the holes.

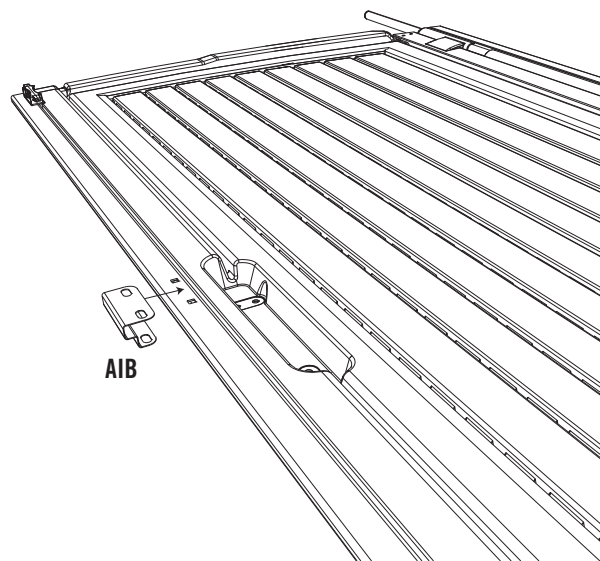


Note: You may need to nudge the Door End Channel to make these holes line up with the gap in the Door.

SEC

6.3

Attach the **Left Door Lock Bracket (AIA)** to the Left Door Strike Plate with two (2) 1/4" x 1 1/2" **Carriage Bolts (ABU)** and two (2) 1/4" **Cap Nuts (ADJ)**.


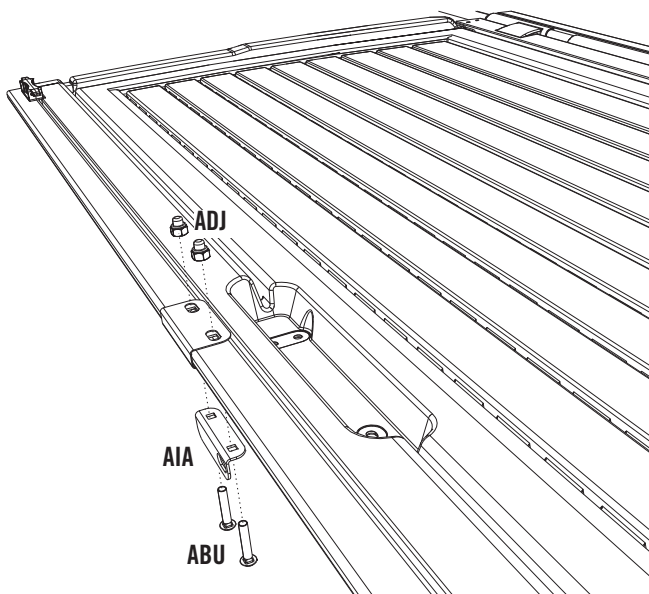


WARNING


Do not overtighten the Cap Nut. If the end of the Bolt breaks through the plastic cap, call our Customer Service Department. Exposed threads on the end of the Bolt may cause serious injuries.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




ADW (x3)



AEE (x3)

SEC


6

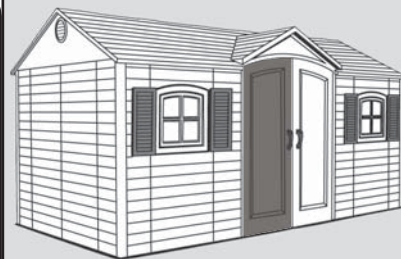

SEC

6.4


Attach the **Left Door Handle (AHZ)** to the Door using three **#10 x 1/2" SAE Flat Washers (AEE)** and three **#10 x 3/4" Pan-Head Screws (ADW)**.

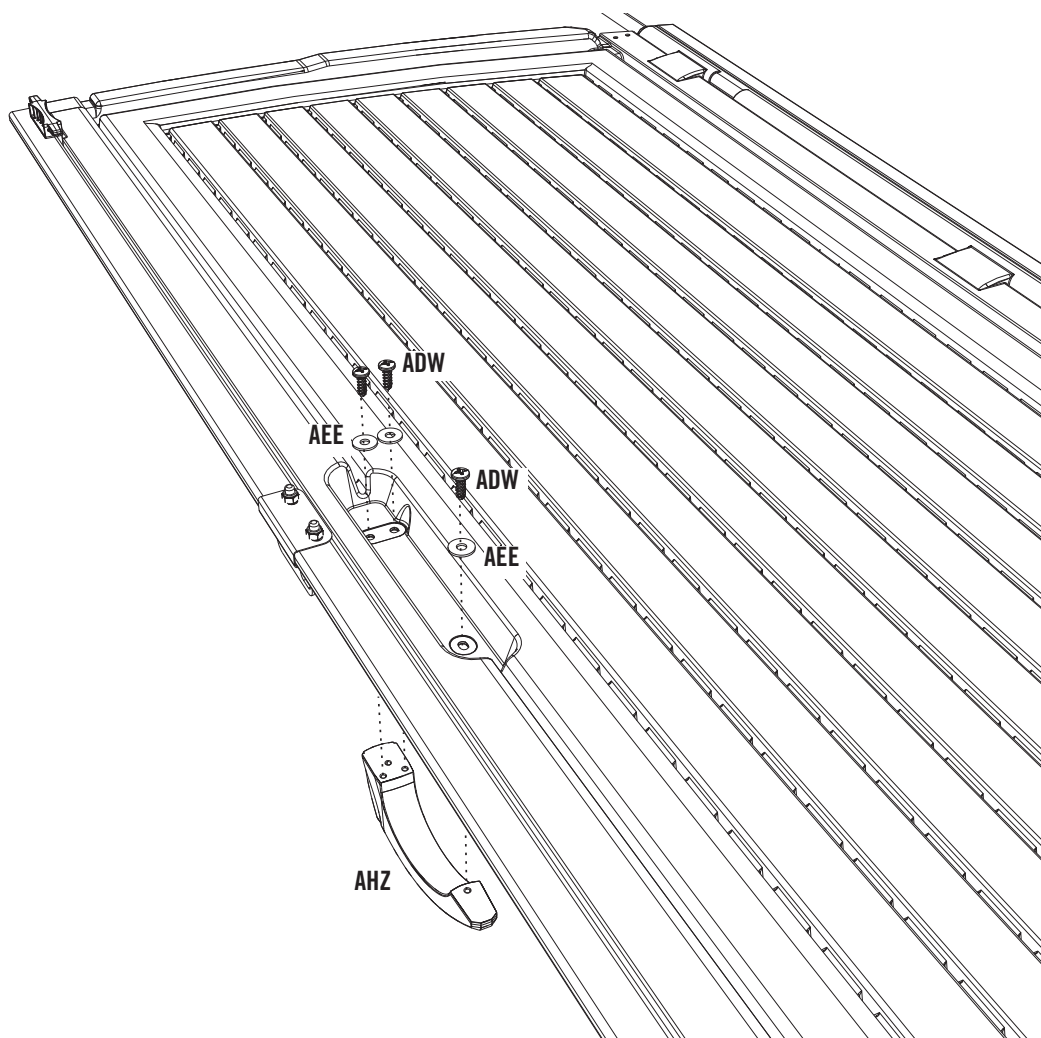


SEC 7 RIGHT DOOR ASSEMBLY

HARDWARE REQUIRED


Hardware shown at actual size




ABV (x2)
1/4" x 2" Carriage Bolt




AEE (x3)
#10 x 1/2 Flat Washer




ADB (x2)
3/8" x 1/2" Steel Spacer




AAB (x2)
1/4" Centerlock Nut



AHY (x1)
Latch Spring




ADW (x4)
#10 x 3/4" Pan-Head Screw




AEB (x2)
1/4" Flat Washer


Part shown at 25% of actual size




AHX (x1)
Latch Cover Plate



AIL (x1)
Right Door Lock Bracket



AHV (x1)
Door Latch




AIO (x1)
Thumb Lever

Part shown at 15% of actual size



AIK (x1)
Right Door Handle


Part shown at 50% of actual size




AHW (x1)
Thumb Lever Extension

METAL PARTS REQUIRED

Part shown at 8% of actual size




AFC (x1)
Door End Channel




PLASTIC PARTS REQUIRED

Part shown at 4% of actual size

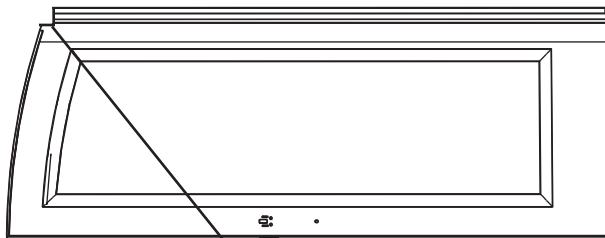

BDK (x1)
Right Front Door (Notched)


TOOLS REQUIRED



Phillips Screwdriver




7/16" Wrench



Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC. 7

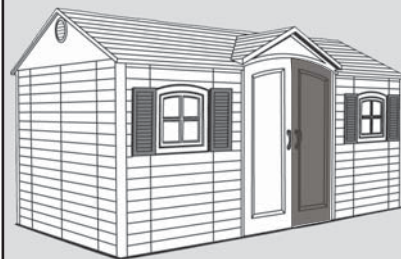


SEC

7.1


RIGHT DOOR ASSEMBLY

Rest the **Right Shed Door (Notched) (BDK)** with front side down, then slide the **Door End Channel (AFC)** onto the Door as shown.

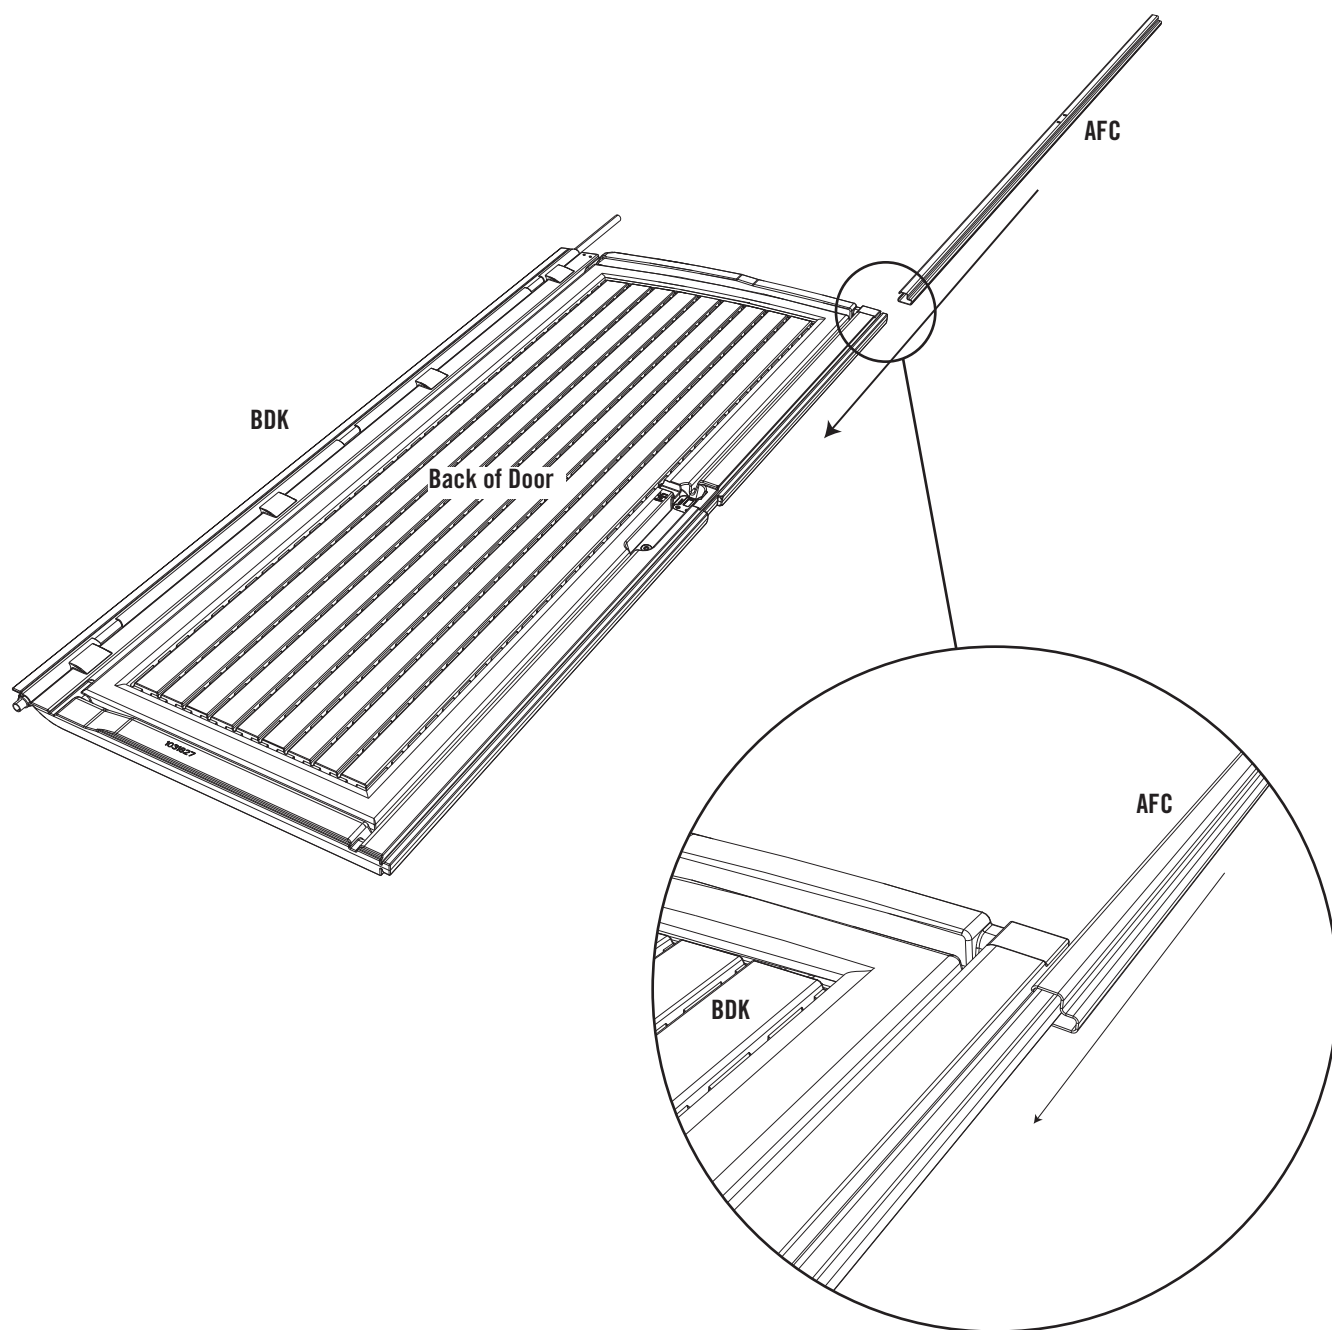




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE


SEC 7

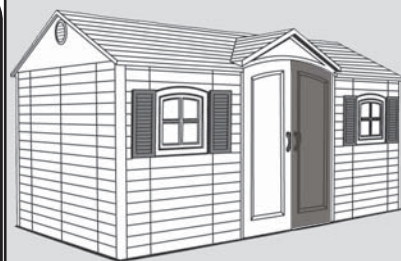

SEC

7.2


Fit knobs of the **Thumb Lever (AIO)** into the grooves of the **Right Door Handle (AIK)**.

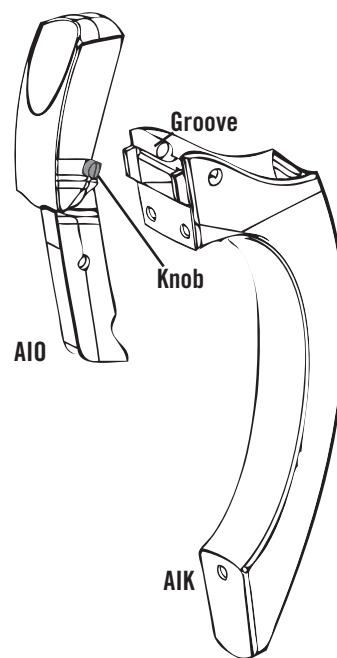

SEC


7.3

Rotate the Thumb Lever into the Right Door Handle. Slide forward until the knobs fit into the holes in the Handle.

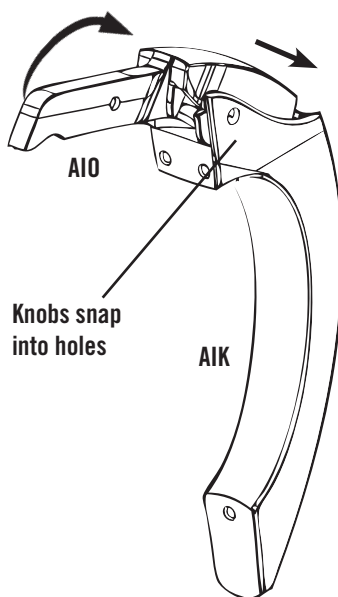





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



7/16"

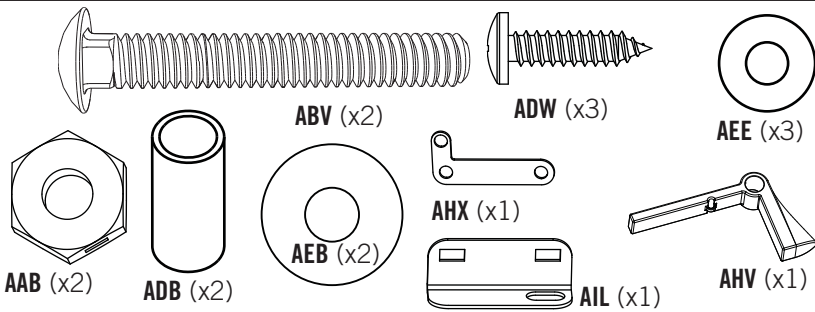


SEC 7

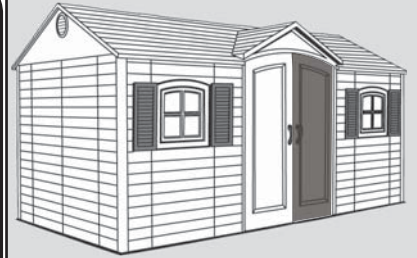

SEC

7.4

Attach the Right Handle Assembly to the Door using three (3) #10 x 1/2" Flat Washers (AEE) and three (3) #10 x 3/4" Pan-Head Screws (ADW).

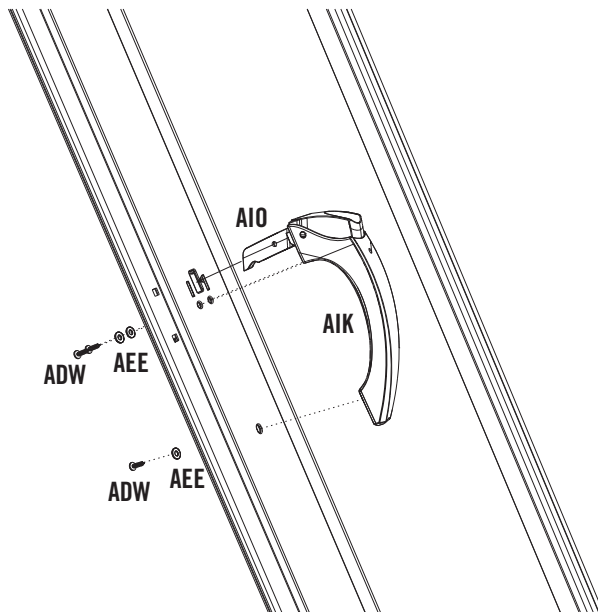



CAUTION

Do not overtighten. Overtightening may damage parts and void warranty.

SEC

7.5

Install Handle Latch assembly onto the Right Door using the required hardware.

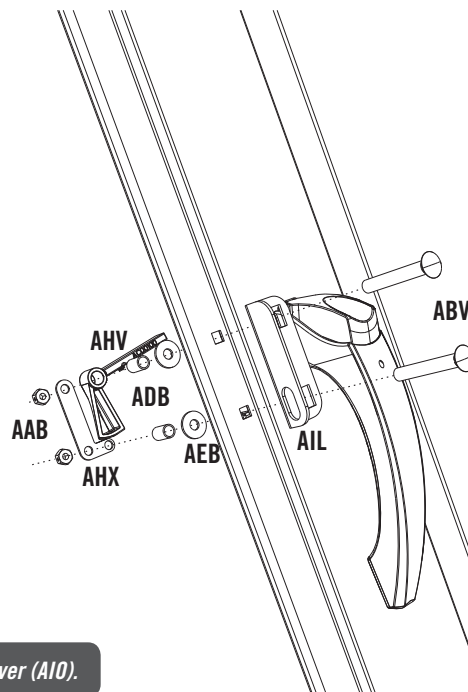
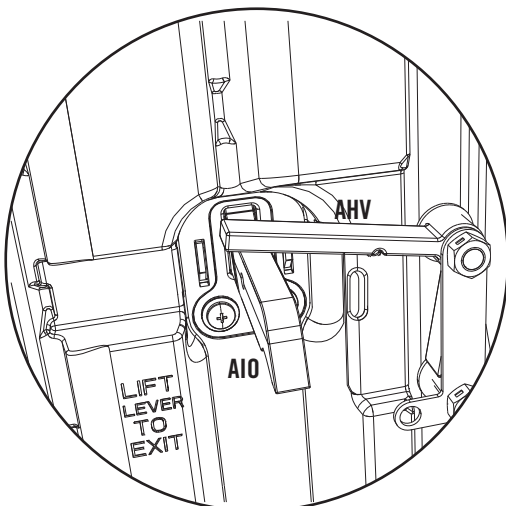


Note: The Door Latch (AHV) goes on top of the Thumb Lever (AIO).




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE


SEC 7




AHY (x1)



AHX (x1)



ADW (x1)

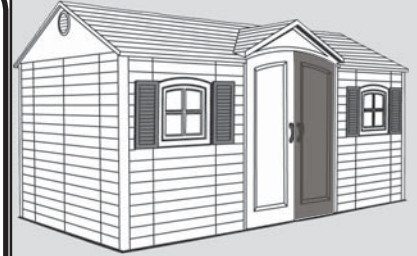


SEC

7.6

Line up the hole in the **Thumb Lever Extension (AHW)** with the hole in the Thumb Lever and **#10 x 3/4" Pan-Head Screw (ADW)** into place.



Note: The Spring is not shown in this illustration in order to better show the correct placement of the Latch Block.

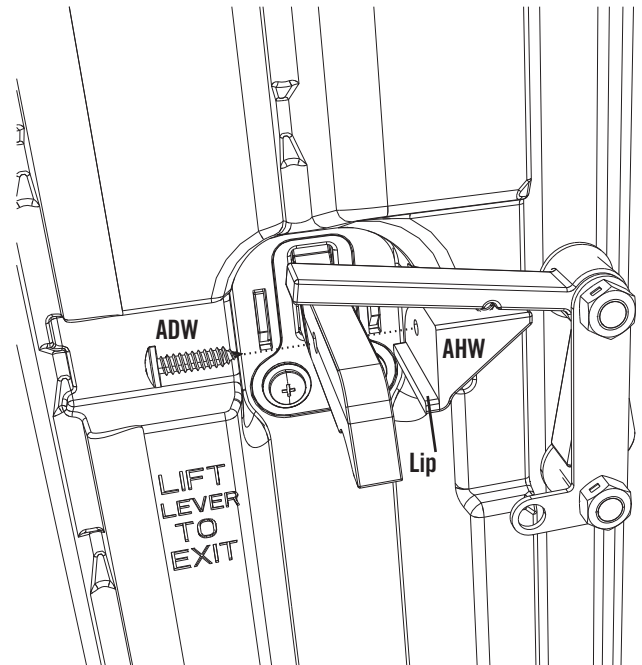


Note: The lip of the Latch Block (AHX) fits under the Thumb Lever (A10).

SEC

7.7

Attach **Latch Spring (AHY)** to the **Door Latch (AHV)** and the **Latch Cover Plate (AHX)**. Set the Door aside.

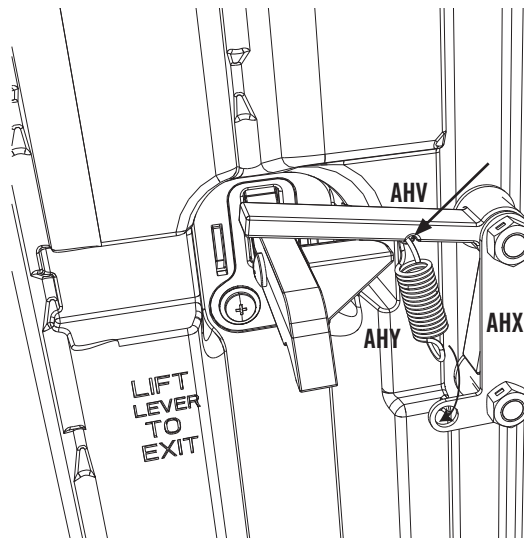

Note: Use pliers to pull spring down and hook into bottom hole.




WARNING

While performing this step, each person should use protective eye glasses to help prevent serious eye injury.


SEC 8 GABLE, TRUSS, DOOR, & ROOF INSTALLATION

HARDWARE REQUIRED


Hardware shown at actual size (*Unless noted otherwise)



AQY (x4)
1/4" x 2" Truss Screw




ADZ (x215)
1/4" x 5/8" Pan-Head Screw
(Not all screws will be used)



AED (x36)
#10 x 1" Fender Washer



ADJ (x4)
1/4" Cap Nut




ADX (x40)
#10 x 1/2" Pan-Head Screw




ARA (x1) 1/8" Drill Bit




AHP (x2)
Cotter Pin



***AXX (x4)**
Truss Hole Insert



***AQZ (x2)**
Entry Gable Bracket




***AJA (x2)**
Foam Cube

METAL PARTS REQUIRED


Parts shown at 8% of actual size (Unless noted otherwise)




AFL (x10)
Roof Support Strip

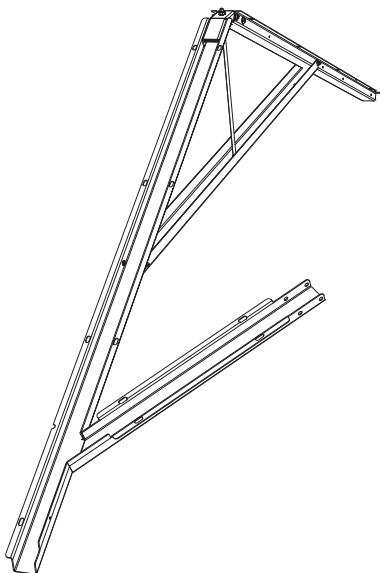


Left Angled Truss Assembly (x1)
(Not shown any scale)

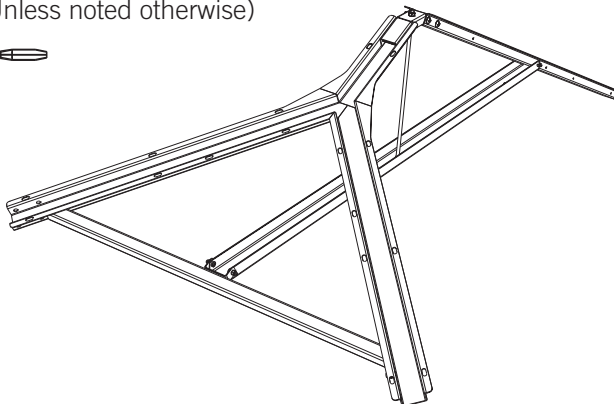

Center Truss Assembly (x1)
(Not shown any scale)

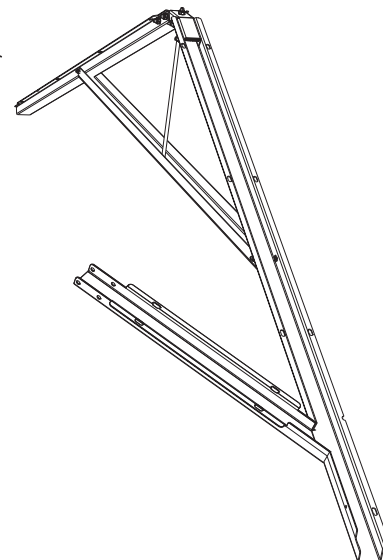


Right Angled Truss Assembly (x1)
(Not shown any scale)

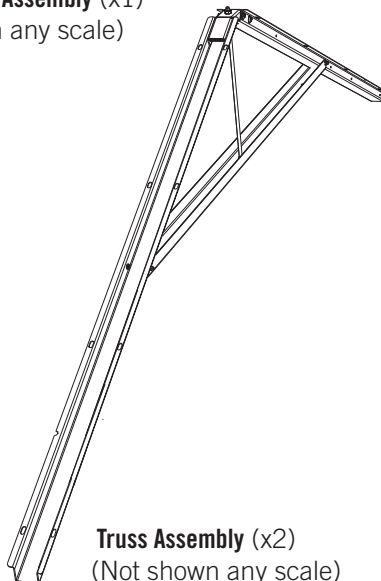


Truss Assembly (x2)
(Not shown any scale)

PLASTIC PARTS REQUIRED


Parts shown at 4% of actual size

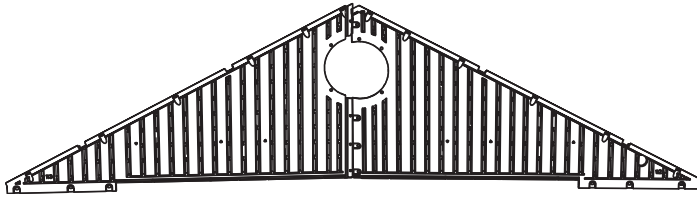


Side Gable Assembly (x2)

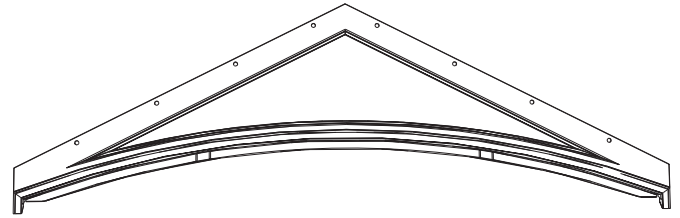


Entry Gable Assembly (x1)




AGQ (x10)
Roof Panel




AFY (x5)
Center Roof Cap



AGG (x1)
Left End Roof Cap




AFW (x1)
Right End Roof Cap

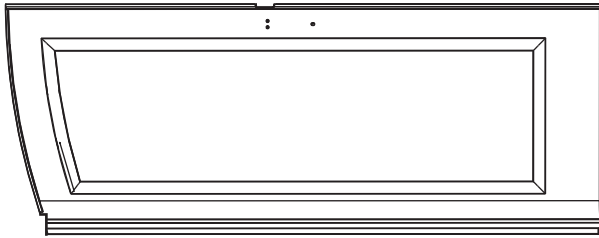


Left Front Door Assembly (x1)




Right Front Door Assembly (x1)




BDT (x1)
Upper Left, Front Gable Roof Panel




BDU (x1)
Upper Right, Front Gable Roof Panel

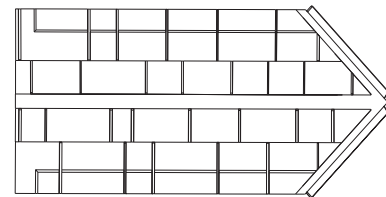

BDW (x1)
Entry Gable Roof Cap




BDR (x1)
Lower Left, Front Gable Roof Panel




BDS (x1)
Lower Right, Front Gable Roof Panel

Part shown at 8% of actual size




AHC (x6)
Skylight

TOOLS REQUIRED




Phillips Screwdriver



Pliers




ARA (x1) 1/8" Drill Bit (Included)




Safety Glasses



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



SEC. 8

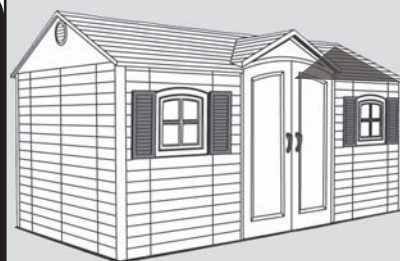


2 ADULTS REQUIRED FOR STEPS 8.1 - 8.23

SEC

8.1

SIDE GABLE INSTALLATION


Align the fourteen holes in the **Side Gable Assembly** with those along the tops of the Wall Panels on the right side of your shed.

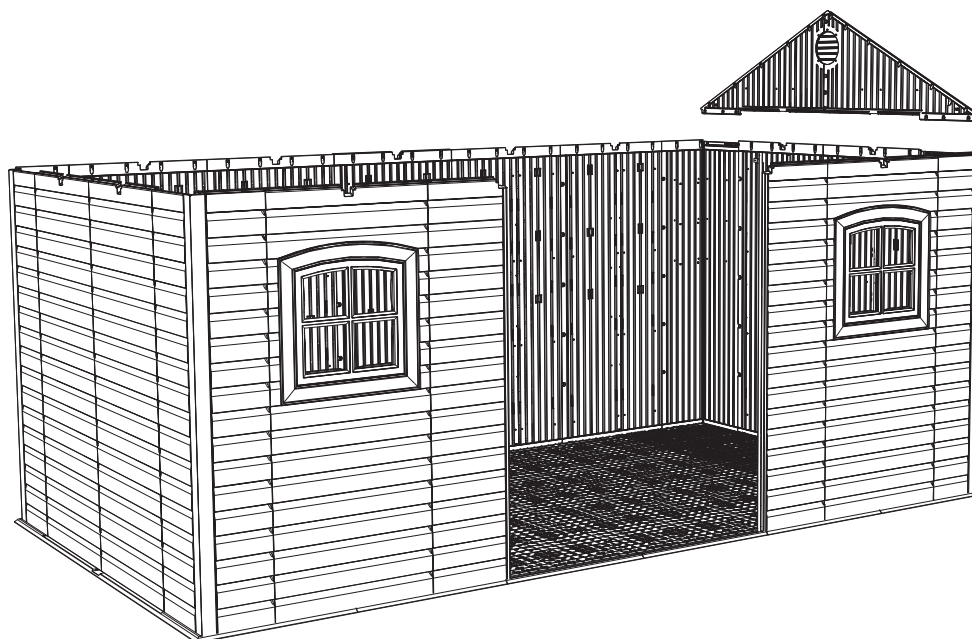

SEC

8.2

Secure the Side Gable Assembly using fourteen (14) 1/4" x 5/8" **Pan Head Screws (ADZ)** at the locations indicated.

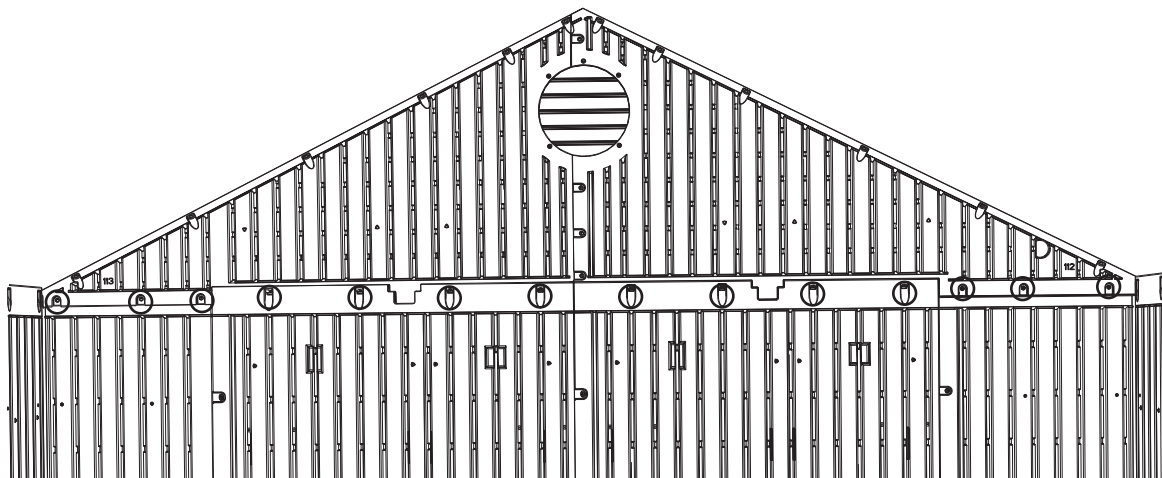



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS STEP

SEC 8





SEC

8.3

TRUSS & ROOF INSTALLATION

Place the ends of the **Truss Assembly** into the set of notches at the top of the Window Wall Panels as shown.

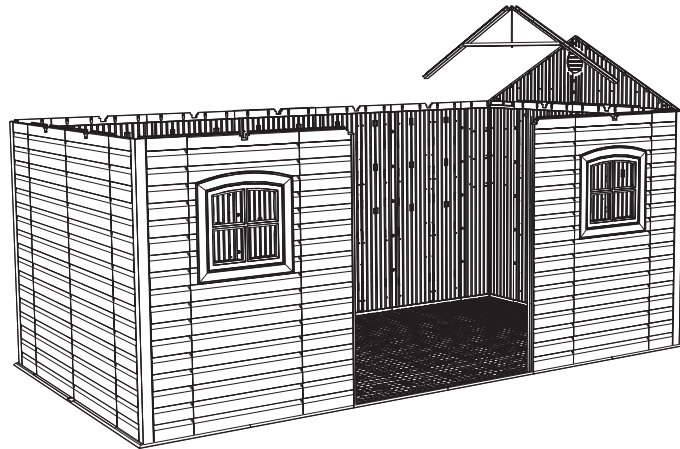
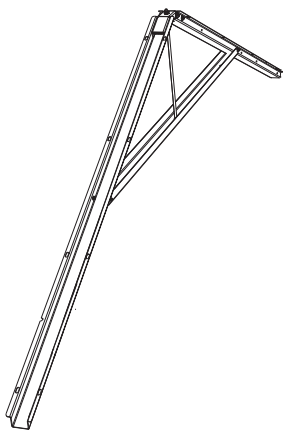


Note: Ensure to carefully read and follow the roof installation instructions and notes. Following each step in the order listed will minimize potential complications during installation.

SEC

8.4

While one adult holds the right Truss Assembly in place, set a **Roof Panel** onto the Truss Assembly and Right Gable. The edge of the Roof Panel fits down inside the Truss Channel. Ensure the alignment nub in the Roof Panel fits into notch on the Truss (this helps to align the holes in the Roof Panel with those in the Truss, the Wall Panel, and Gable).

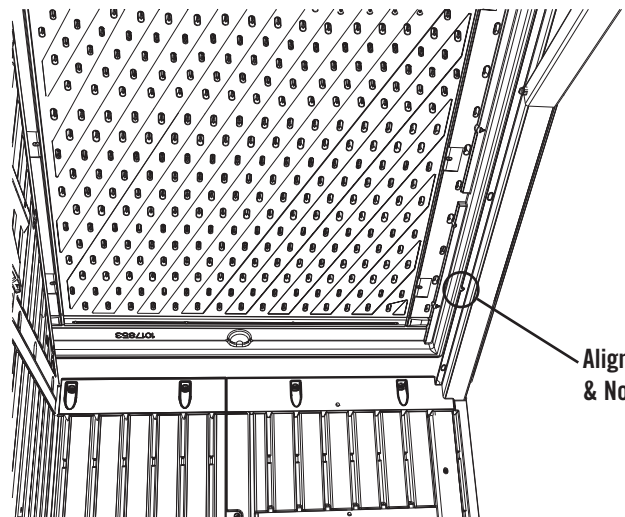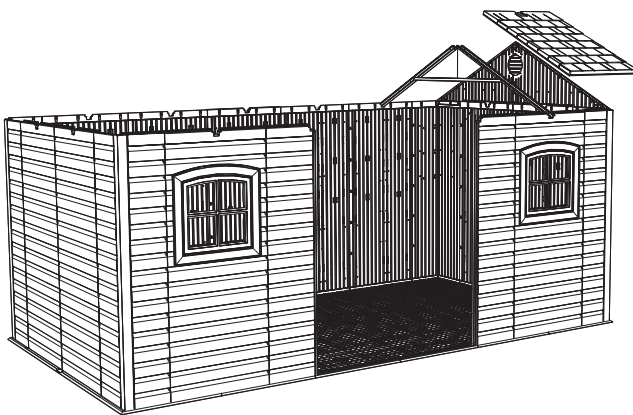

Alignment Nub
& Notch


Interior Upward View




Note: The edge of the Roof Panel fits into the Truss Assembly.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




(Not actual size) **AFL** (x2)



ADZ (x21)


SEC. 8

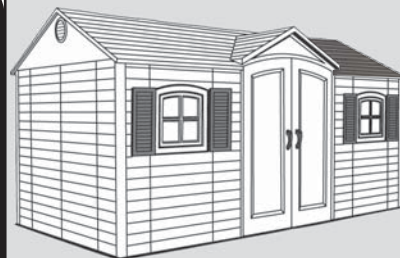


SEC

8.5

With the Roof Panel for Domed Skylight Assembly in position between the Gable and Truss, slide two (2) **Roof Supports (AFL)** into place within the notches of the Roof Panel for Domed Skylight. The bottom lip of the Roof Panels fit over the Wall Panel. The top of the Wall Panel fits into the ridge near the bottom of the Roof Panel.

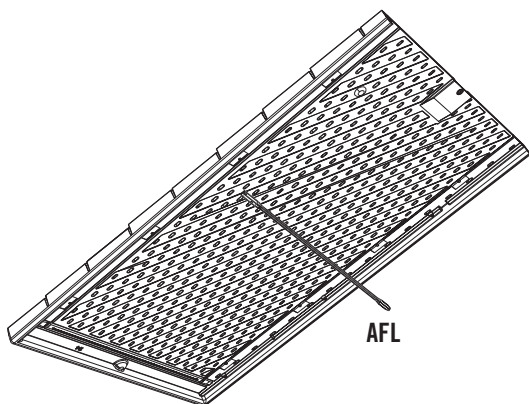

AFL

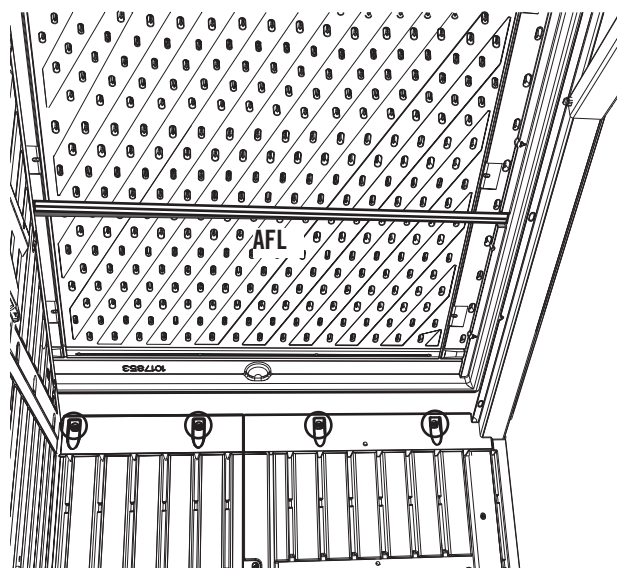

Interior Upward View





Note: The Roof Support fits into the notches in the Roof Panel (as shown). The holes in the Roof Support Strips are for manufacturing purposes only.

SEC

8.6


Place the ends of the **Right Angled Truss Assembly** into the next set of notches on the Wall Panels as shown. **The angled arm faces inward.** While one adult holds the Right Angled Truss Assembly in place, set a **Roof Panel** between the two Truss Assemblies. The edges of the Roof Panel fit down inside the Truss Channels. Ensure the alignment nub in the Roof Panel fits into notch on the Truss and secure in place with ten (10) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

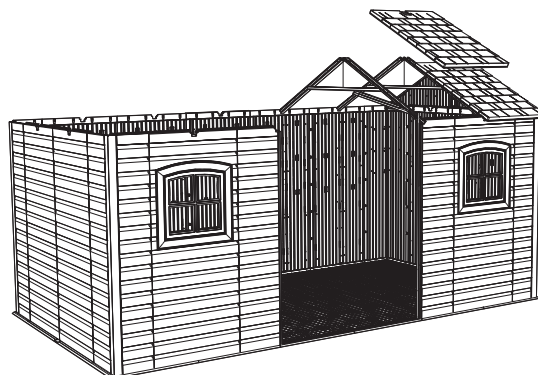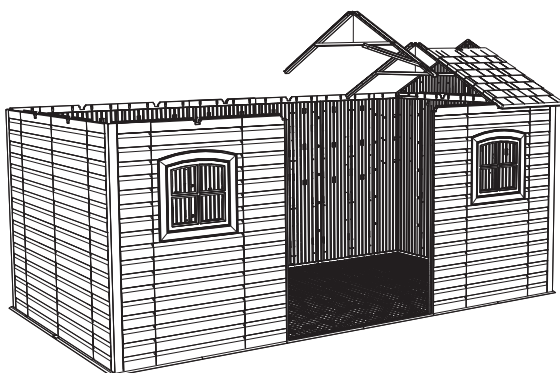


Note: Ensure the ridge in the bottom of the Roof Panel fits into the top of the wall.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




SEC 8

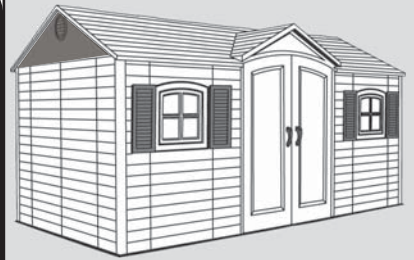

SEC

8.7


Align the fourteen holes in the left **Side Gable Assembly** with those along the tops of the Wall Panels on the left side of your shed. Secure the Side Gable Assembly using fourteen (14) **1/4" x 5/8" Pan Head Screws (ADZ)** at the locations indicated.

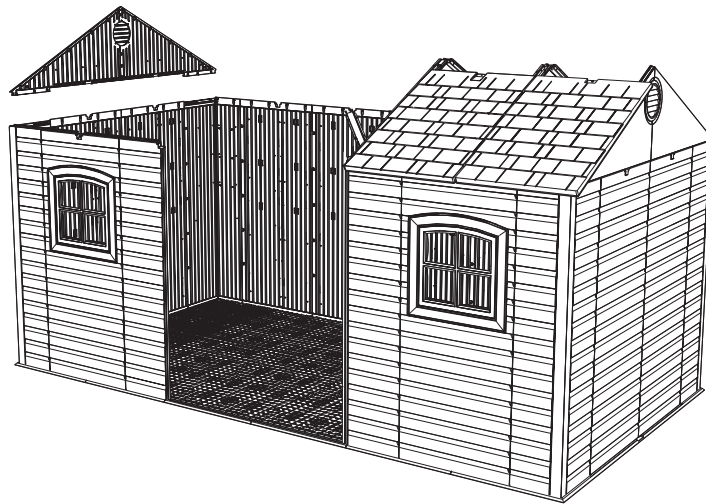

SEC


8.8

Place the ends of the second **Truss Assembly** into the set of notches at the top of the Window Wall Panels as shown.

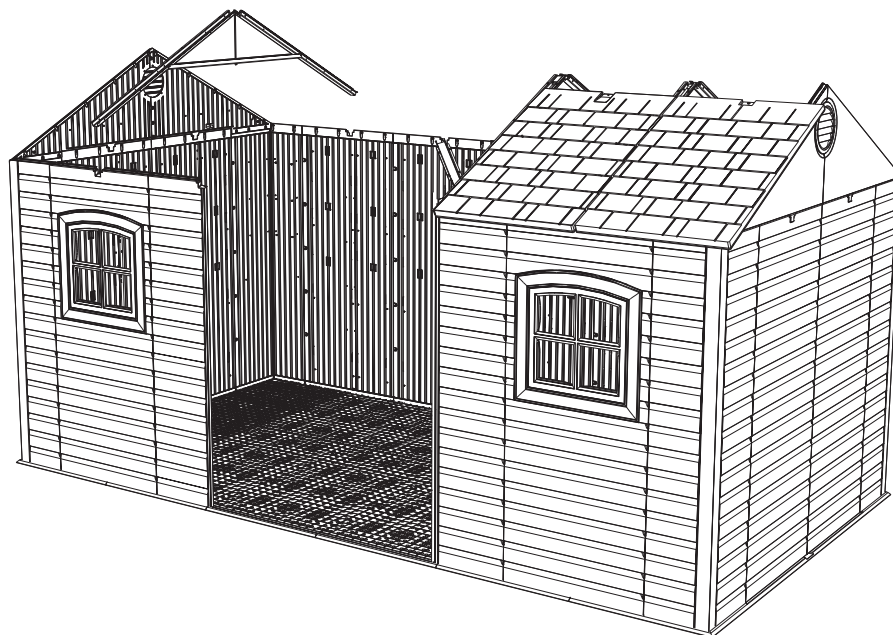




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




(Not actual size) **AFL** (x2)



ADZ (x21)


SEC. 8

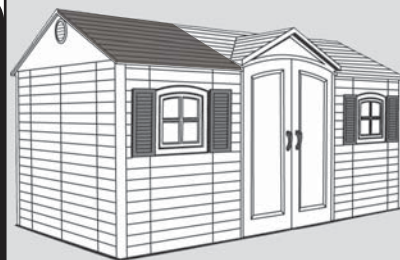

SEC

8.9



While one adult holds the left Truss Assembly in place, set a Roof Panel onto the Truss Assembly and left Side Gable. The edge of the Roof Panel fits down inside the Truss Channel. Ensure the alignment nub in the Roof Panel fits into the notch on the Truss. Secure with eleven (11) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

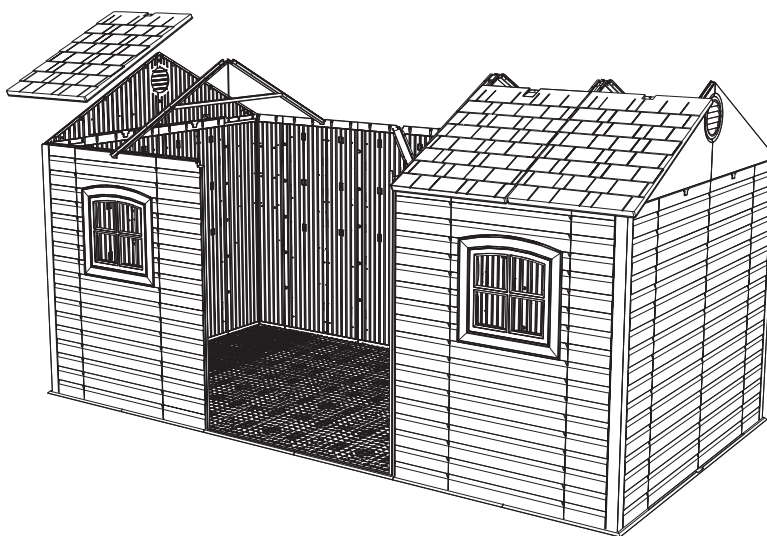

SEC


8.10

Place the ends of the **Left Angled Truss Assembly** into the next set of notches on the Wall Panels as shown. **The angled arm faces inward.** While one adult holds the Left Angled Truss Assembly in place, set a Roof Panel between the two Truss Assemblies. The edges of the Roof Panel fit down inside the Truss Channels. Ensure the alignment nub in the Roof Panel fits into the notch on the Truss and secure in place with ten (10) **1/4" x 5/8" Pan-Head Screws (ADZ)**.

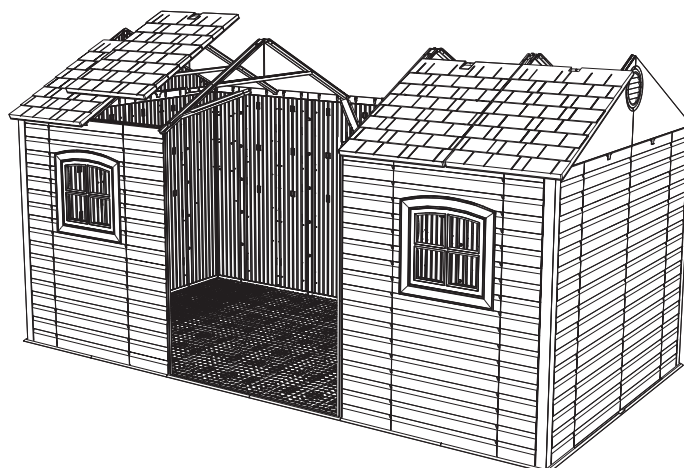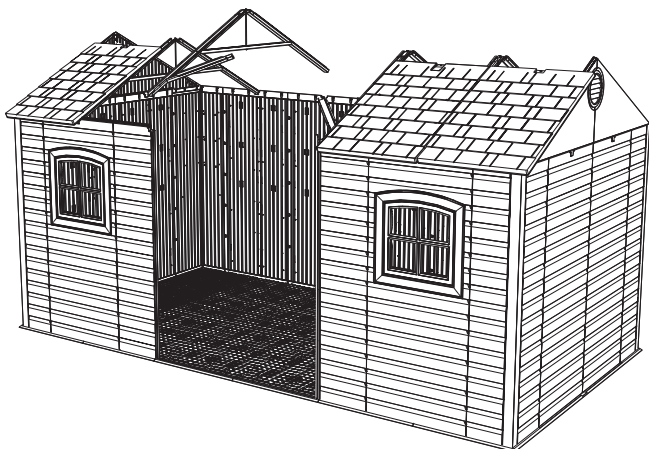




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



(Not actual size) **AFL** (x4)



ADZ (x42)


SEC 8



SEC

8.11


Secure a Roof Panel to each end of the rear of the Shed as shown. The edges of the Roof Panels fit down inside the Truss Channels. Ensure the alignment nubs in the Roof Panels fit into the notches on the Trusses and secure in place with eleven (11) **1/4" x 5/8" Pan-Head Screws (ADZ)** per Panel.

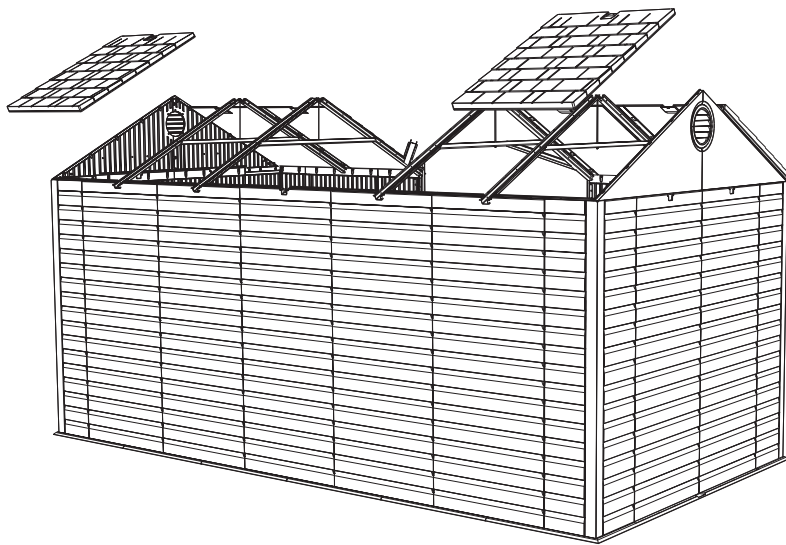

SEC


8.12

Secure two Roof Panels to the next set of Trusses on the rear of the Shed. The edges of the Roof Panels fit down inside the Truss Channels. Ensure the alignment nubs in the Roof Panels fit into the notches on the Trusses and secure in place with ten (10) **1/4" x 5/8" Pan-Head Screws (ADZ)** per Panel.

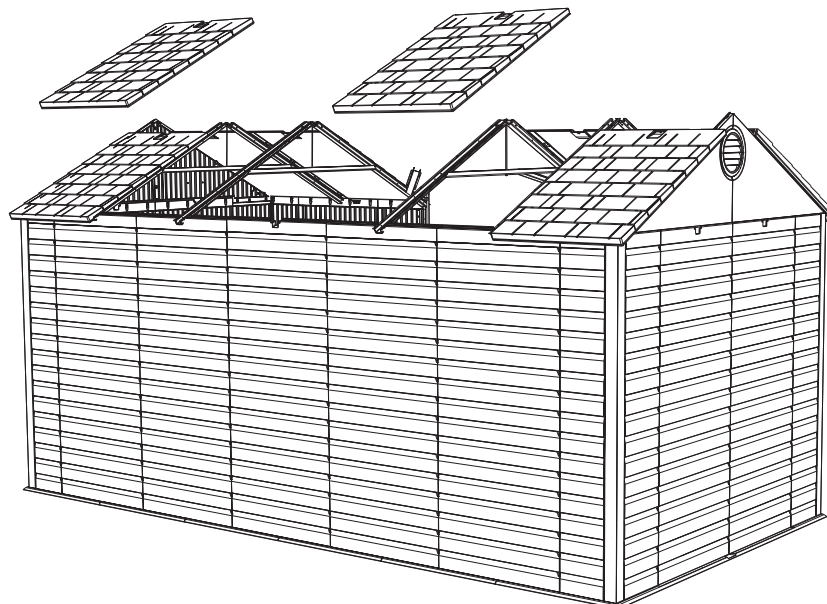



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




7/16"




ADJ (x4)



(Not actual size) AFL (x2)




ADZ (x20)



AQY (x4)

SEC

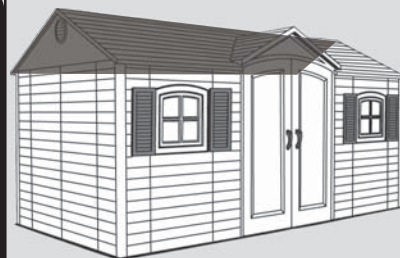


SEC

8.13

Set the back end of the **Center Truss Assembly** into the notch at the top of the center rear Wall Panel and the front, angled ends into the arms of the Left and Right Angled Truss Assemblies. Set the front arms of the Center Truss Assembly into the angled arms of the Left and Right Angled Truss Assemblies, and secure the **Center Truss Assembly** to the Left and Right Angled Truss Assemblies using the required hardware. Tighten hardware securely.

Angled Arm



Angled Arm

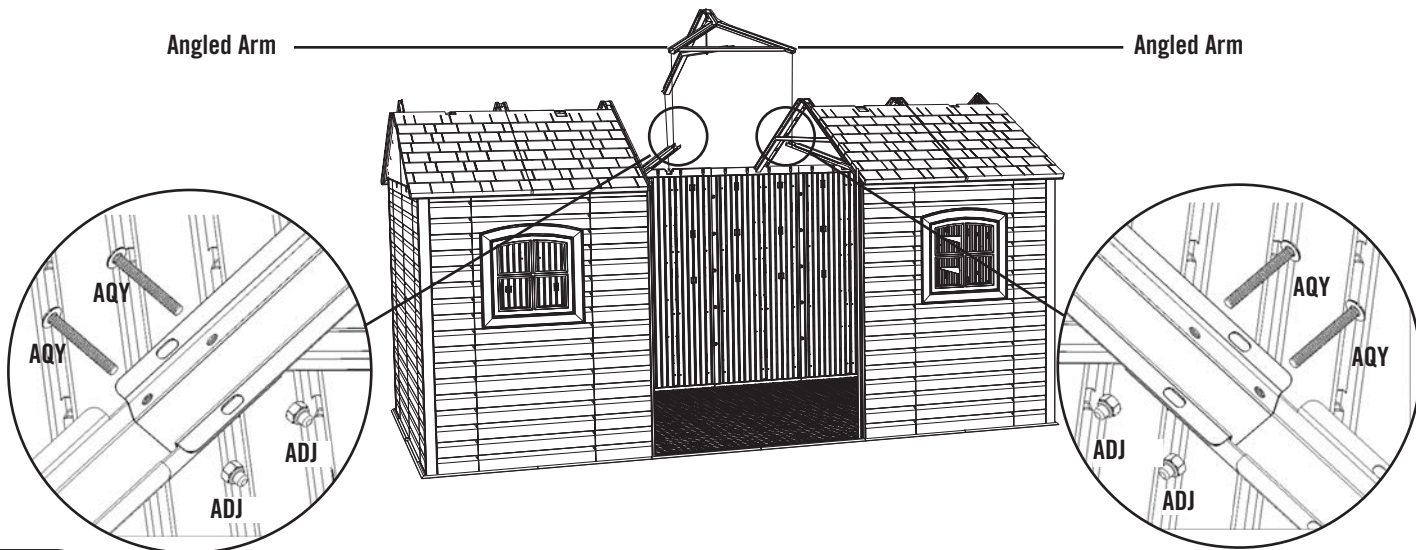

SEC

8.14

Install the remaining Roof Panels and **Roof Supports (AFL)** to the rear of the shed using twenty (20) 1/4" x 5/8" Pan-Head Screws (ADZ).

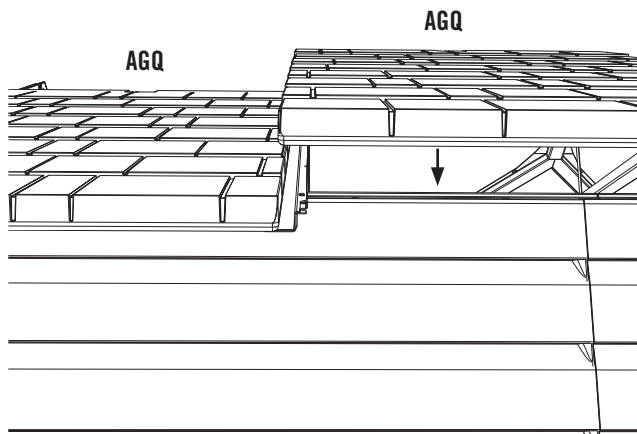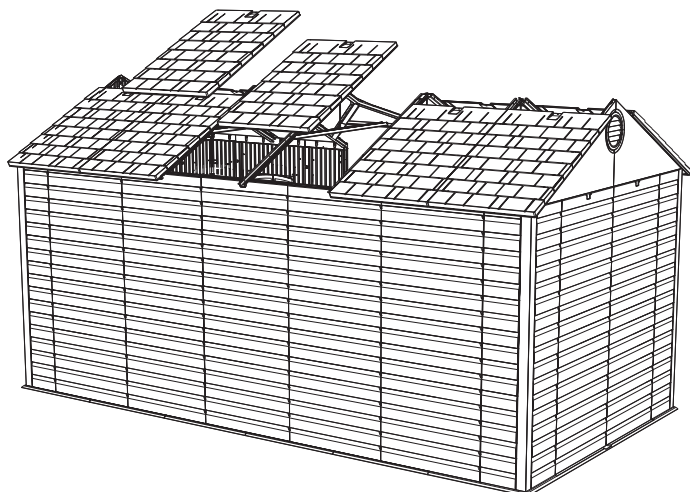


Note: Roof Panels butt up against each other inside the Truss Gutter Channels.

Rear of Shed




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



AHP (x2)

SEC 8


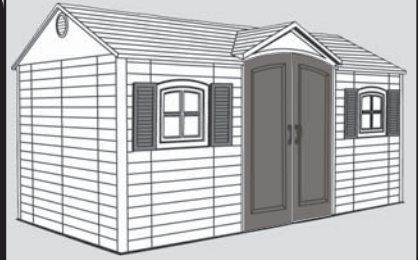


SEC

8.15

DOOR & ENTRY GABLE INSTALLATION

Insert the hinge tube of the **Left, Front Door Assembly** into the left, front Door Hinge Bushing as shown. Ensure bottom of Hinge fits completely into the Door Hinge Bushing.

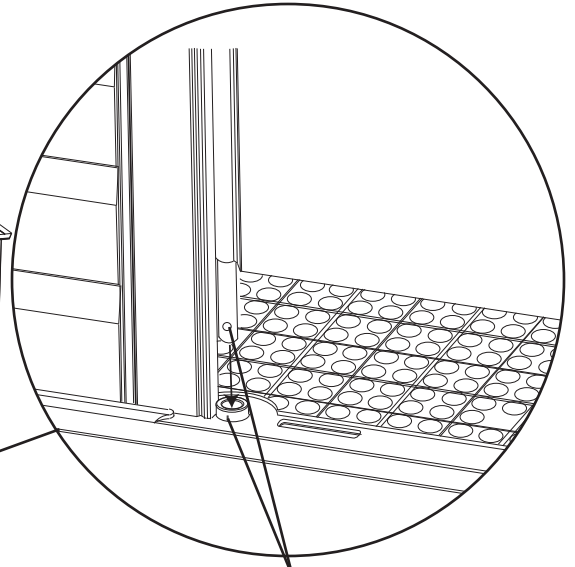
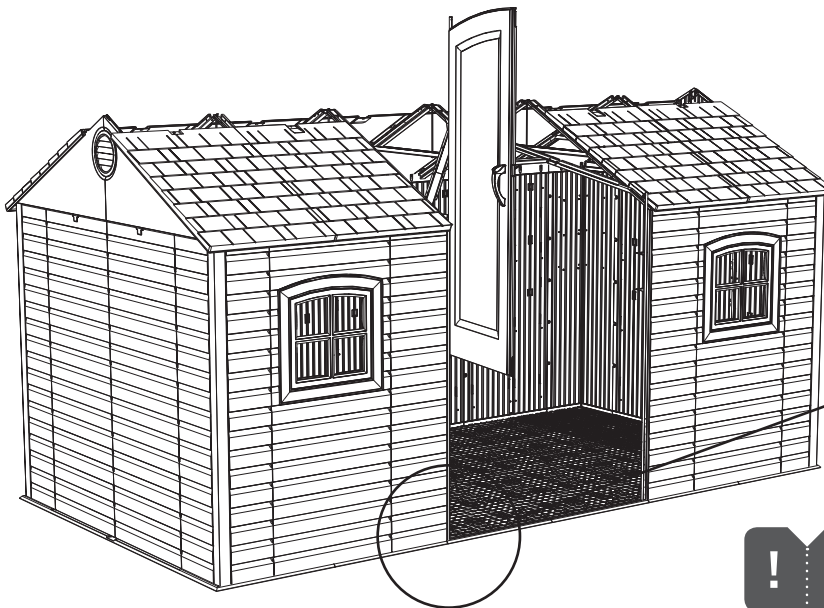


Note: Ensure that these two holes line up, so that the Cotter Pin (AHP) can be inserted.

SEC

8.16

Insert a **Cotter Pin (AHP)** through the Bushing and Door Hinge. Use a pair of pliers to bend the ends of the Cotter Pins outward. **Repeat steps 8.15 & 8.16 for the Right, Front Door Assembly (Notched).**

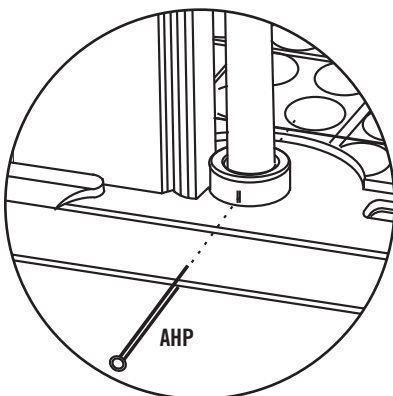

Note: Use pliers to bend back the ends of the Cotter Pin (AHP).



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE





SEC 8



SEC

8.17



While another adult holds the Doors in place, slide the **Entry Gable Assembly** over the Door Hinges. The tops of the hinges will fit into the holes on each end of the Gable.

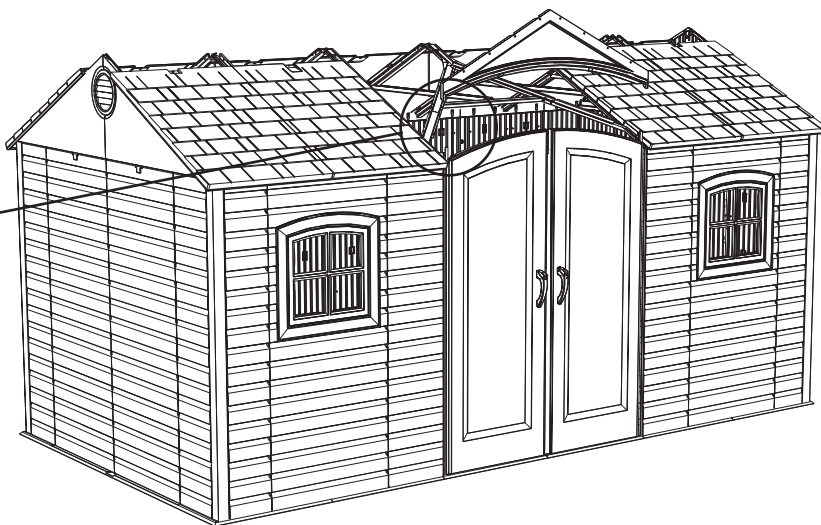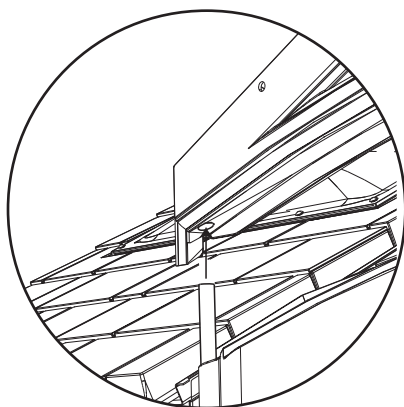

SEC

8.18


Attach the **Upper Left and Right Front Gable Roof Panels (BDT & BDU)** using seven (7) $1/4"$ x $5/8"$ Pan-Head Screws (ADZ) per Panel at the locations indicated.

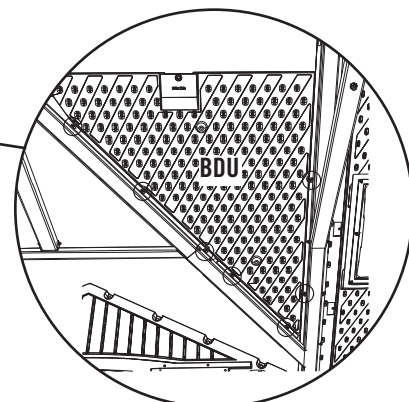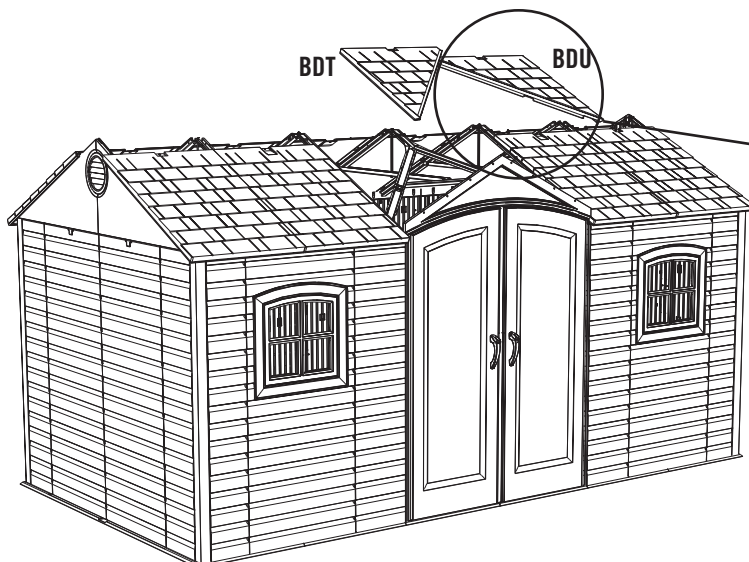


Interior Upward View



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




SEC 8

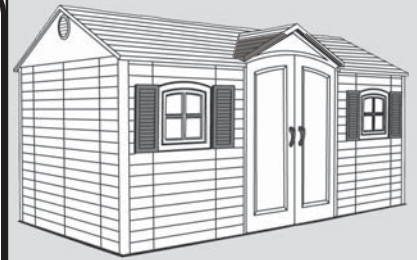

SEC

8.19



Align the holes in the **Lower Left Front Gable Roof Panel (BDR)** with those in the Angled Truss and Front Gable Assemblies and secure with the required hardware. Repeat this step for the **Lower Right Front Gable Roof Panel (BDS)**.

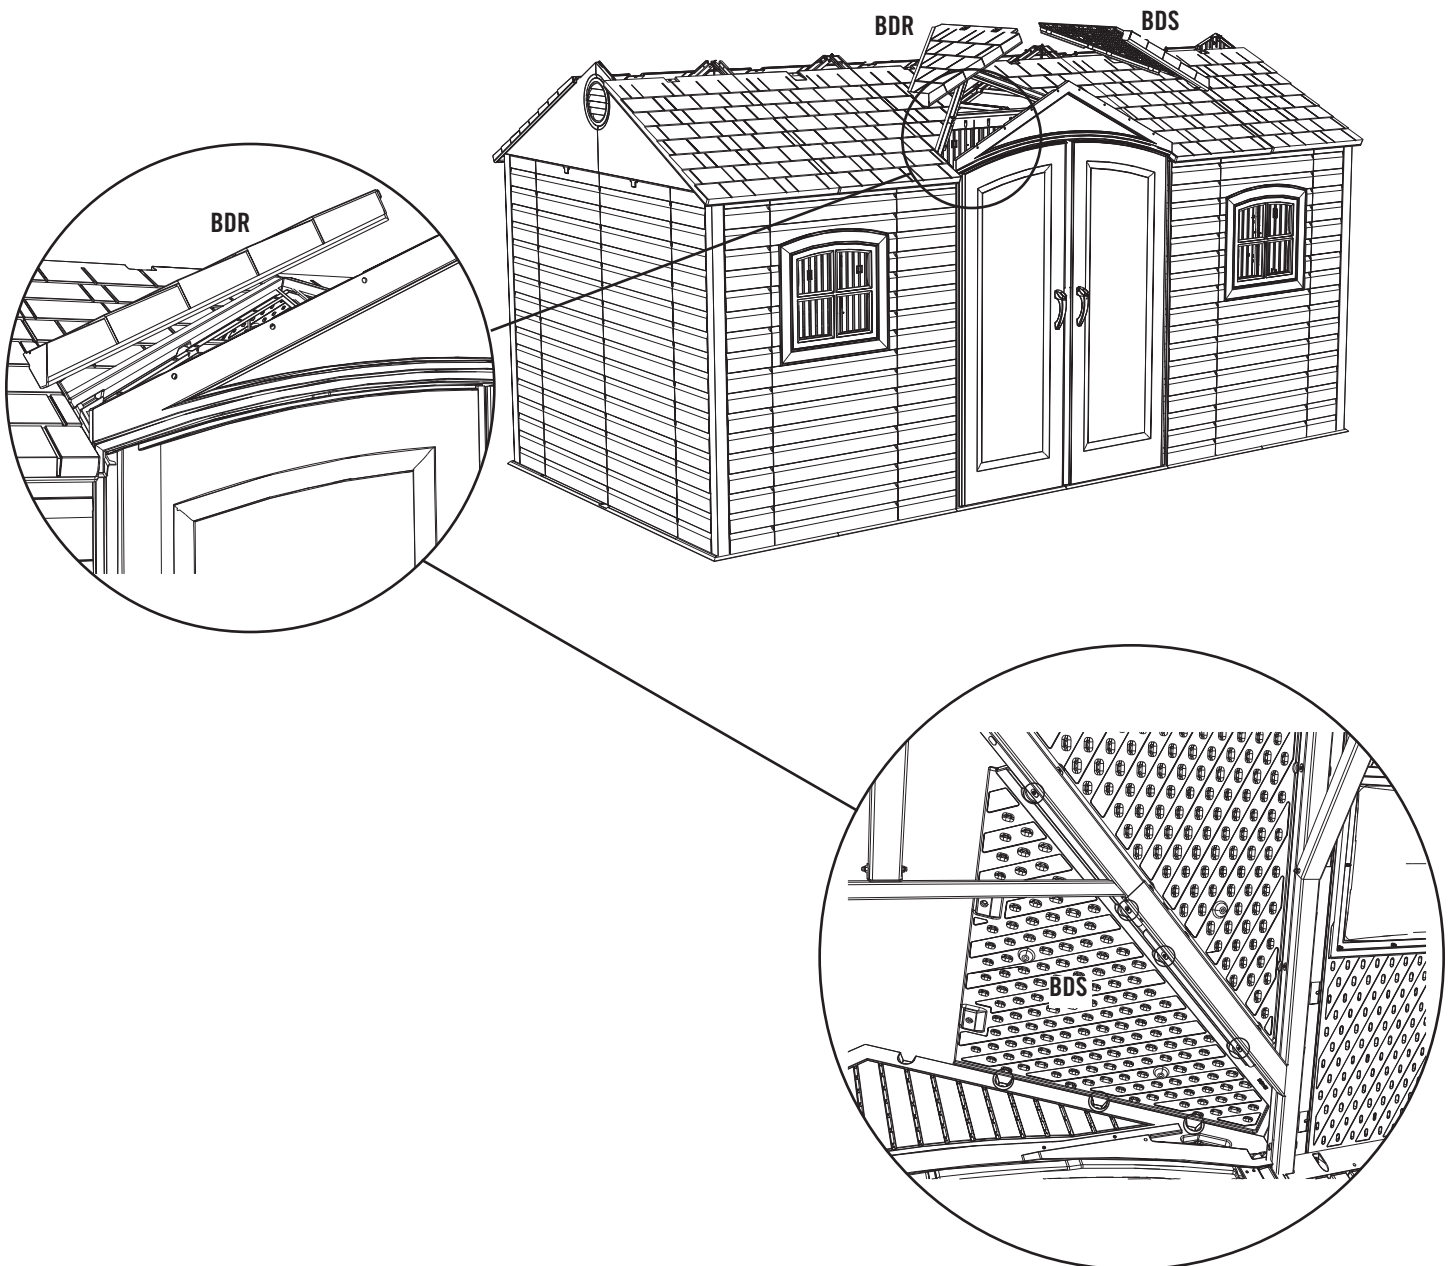


Interior Upward View



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




ADZ (x10)



AJA (x2)
(Not to scale)


SEC. 8

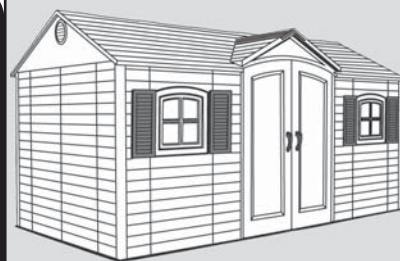

SEC

8.20



Insert two **Foam Cubes (AJA)** inside the Center Truss Assembly at the location shown. The purpose of the Foam Cubes is to block light entering at this point.

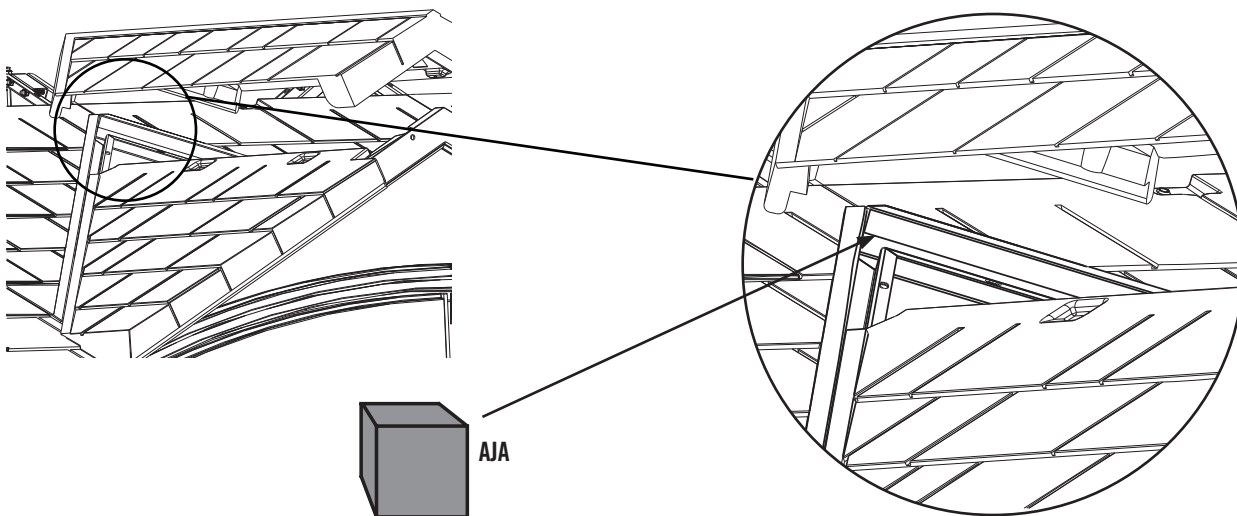

SEC

8.21

Attach the **Entry Gable Roof Cap (BDW)** at the locations indicated using the required hardware.

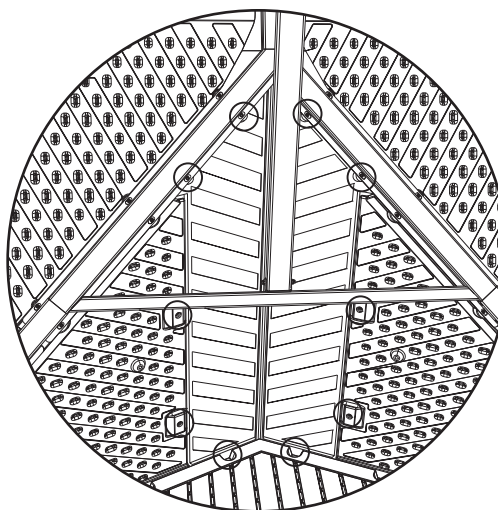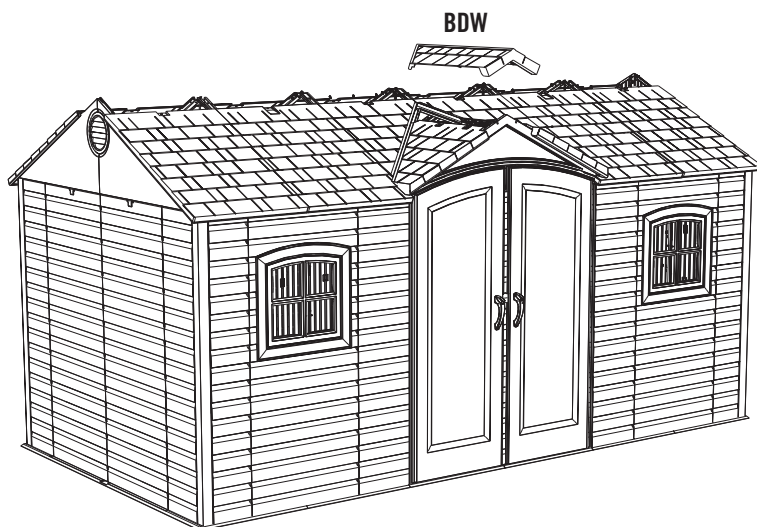





Interior Upward View



Note: Attach the Roof Cap to the Panels and the Gable at the locations shown.




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADX (x4)




ARA (x1) (Included)



AQZ (x2)
(Not to Scale)


SEC 8

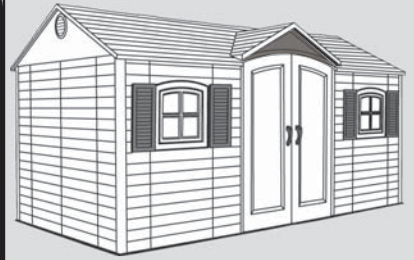


SEC

8.22

Loosely attach the **Entry Gable Bracket (AQZ)** to the Truss at the location shown with a **Screw (ADX)**. Turn the Entry Gable Bracket into position and use the hole as a guide for the **1/8" Drill Bit (ARA)**. Carefully drill through the Gable and into the Door Hinge (be sure that the bit goes into the Hinge Tube but not all the way through).

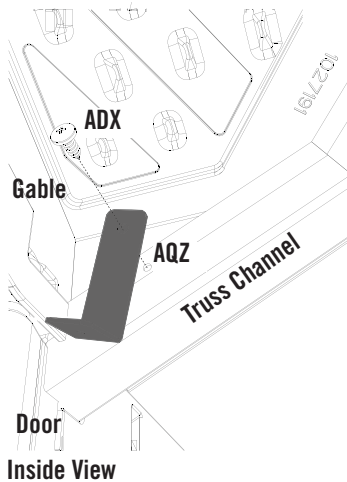

Inside View

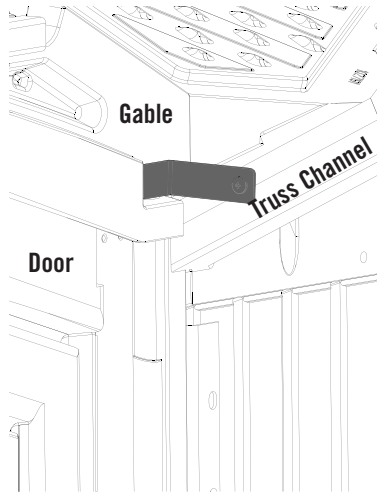

Inside View



WARNING

While performing this step, each person should use protective eye glasses to help prevent serious eye injury.




CAUTION

Do not drill all the way through the Gable. Only drill into the Hinge Tube.

SEC

8.23

Insert two (2) **#10 x 1/2" Pan-Head Screws (ADX)** through the Bracket and into the Gable and Door Hinge. **Repeat** steps 8.22 - 8.23 for the other end of the Front Entry Gable.

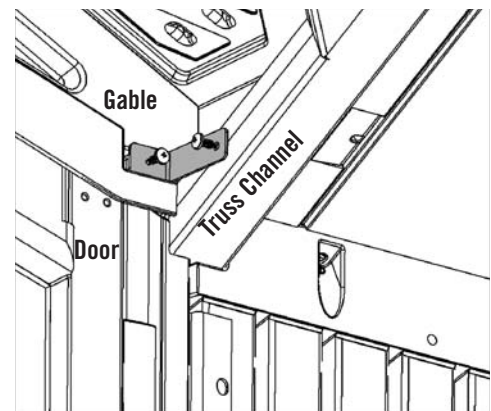


Inside View



Note: The front of the Panel fits over the Gable.



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



SEC 8




SEC

8.24

Starting at the left side of your shed, attach the **Left End Roof Cap (AGG)** to the Roof Panels and Left Side Gable. Continue moving to the right attaching the **Center Roof Caps (AFY)**. Finally attach the **Right End Roof Cap (AFW)** to the Roof Panels and Gable.



Note: Use only a hand screwdriver for this step.

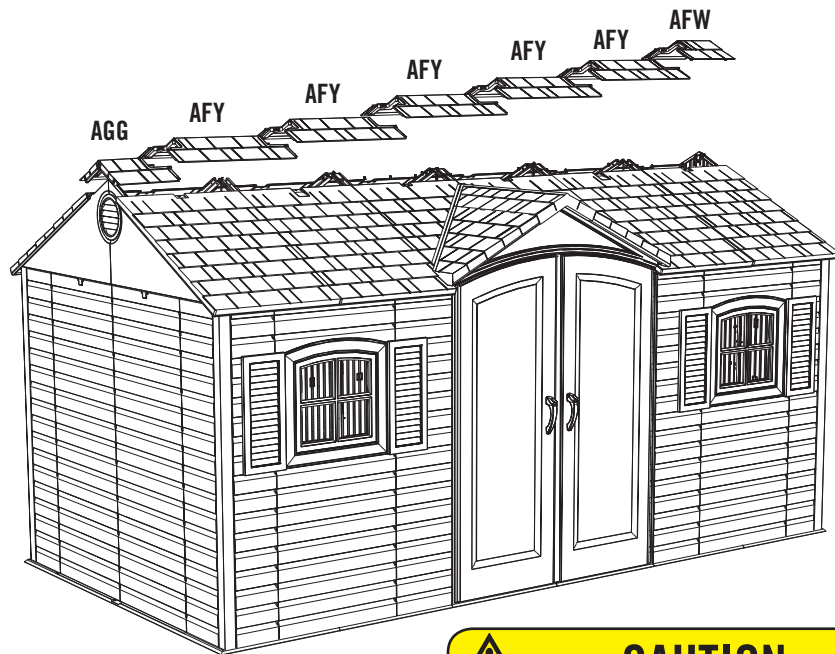


CAUTION

Only hand tighten screws. Do not overtighten. Overtightening may damage plastic parts and void warranty.

SEC



8.25

Connect the Roof Caps to each other using **1/4" x 5/8" Pan-Head Screws (ADZ)**.

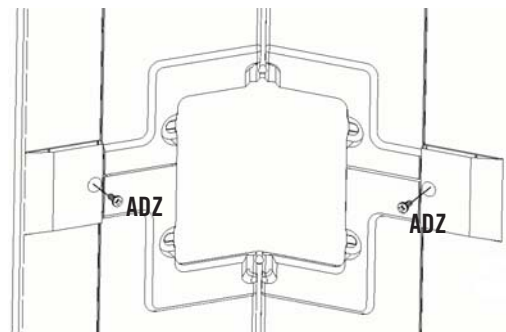





TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADX (x36)



AED (x36)



AXX (x4)
(Not to scale)




SEC 8

SEC

8.26


SKYLIGHT INSTALLATION

Pre-fold **Skylight (AHC)** before installing. Push folded Skylight up through opening between Roof Caps; open Skylight; use tabs to pull Skylight down into place. Fasten Skylight in place with **#10 x 1" Fender Washers (AED)** and **#10 x 1/2" Pan-Head Screws (ADX)** (pull down on tabs while inserting screw to provide resistance). **Repeat this step for each Skylight.**




Note: Use only a hand screwdriver for this step.


AHC

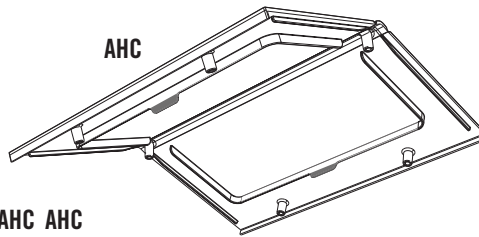

AHC AHC AHC AHC AHC AHC

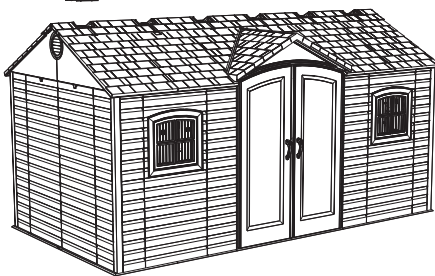

Pull down on tabs while inserting screws.

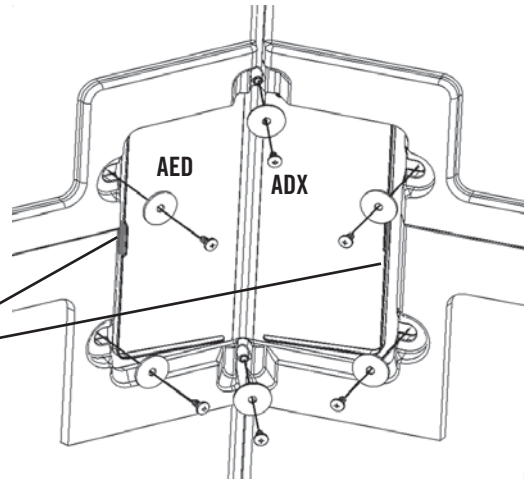


SEC


8.27

GABLE CLIP INSERTION

Insert two (2) **Truss Hole Inserts (AXX)** into each side Wall as shown.

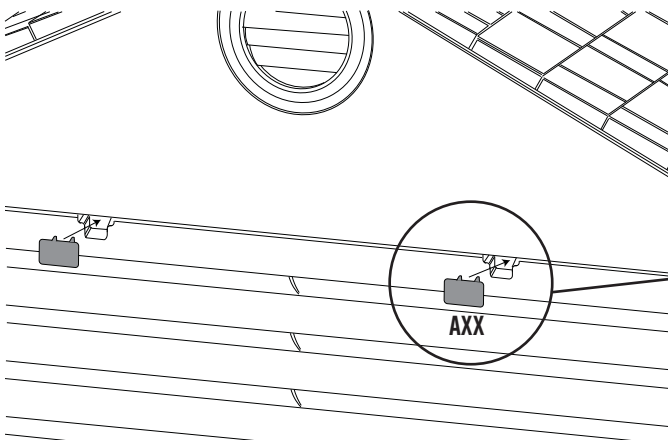


Note: Gable Clip can only be inserted with the arrow pointing up.

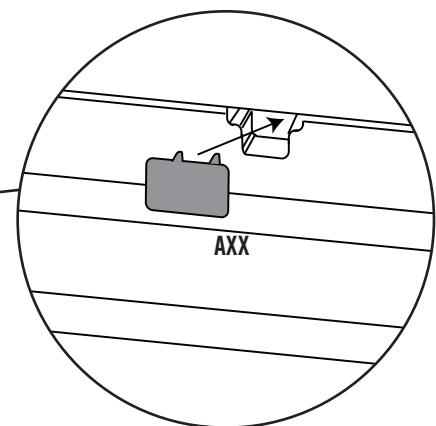

SEC 9 SHUTTER INSTALLATION

HARDWARE REQUIRED

Hardware shown at actual size (*Unless noted otherwise)




ADS (x16)
1/4" x 3/4" Phillips Pan-Head Screw

METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION


PLASTIC PARTS REQUIRED

Part shown at 10% of actual size

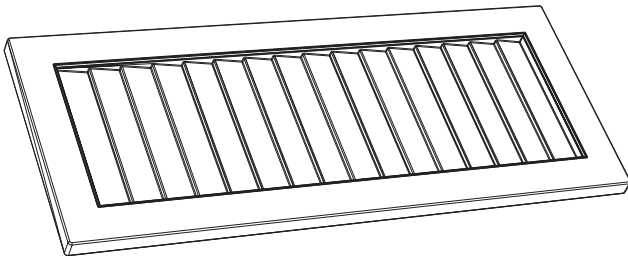

AYI (x4)
Shutter


TOOLS IDENTIFIER



Phillips Screwdriver




Tape Measure



Electric Drill



(ARA) 1/4" Drill Bit



Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



NO HARDWARE REQUIRED FOR THIS PAGE

SEC 9

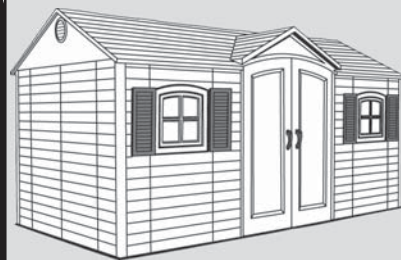


SEC

9.1

SHUTTER INSTALLATION


Below is a map of potential screw hole locations. You will use these locations in the next step. Some sheds will have small bumps molded into the plastic at the locations shown. If there are no bumps, measure carefully before drilling in the next step. The left-side holes are found in the first and third grooves, counting from the left wall seam. The right side holes are in the first and third grooves, counting from the right wall seam.

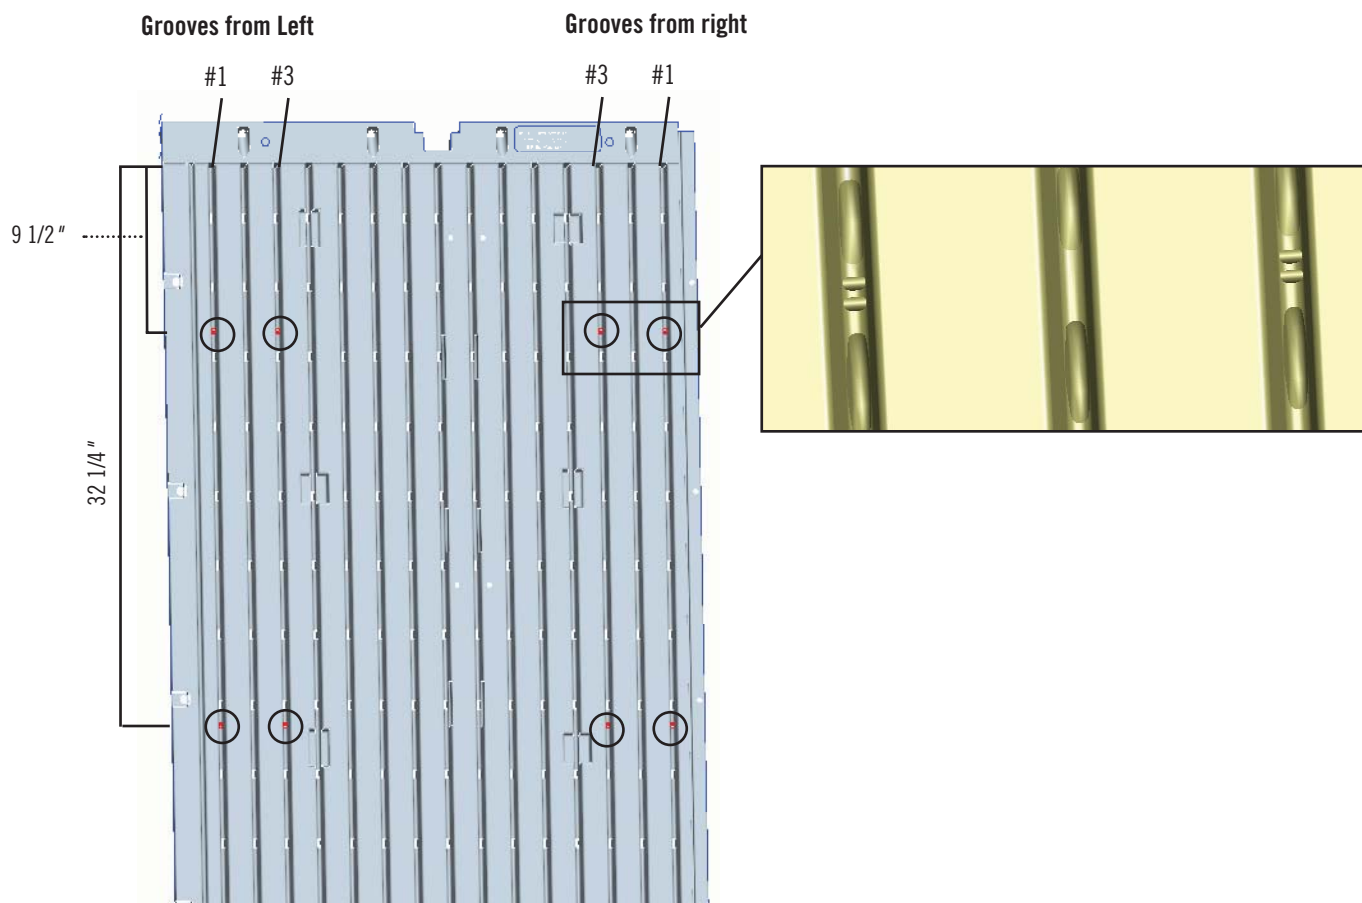




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE

1/4" Drill Bit



NO HARDWARE REQUIRED FOR THIS PAGE


SEC 9

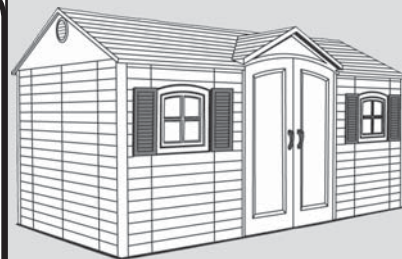

SEC

9.2

Use a 1/4" Drill Bit to drill holes from the inside of the shed at the locations shown. Refer to previous step for measurements.

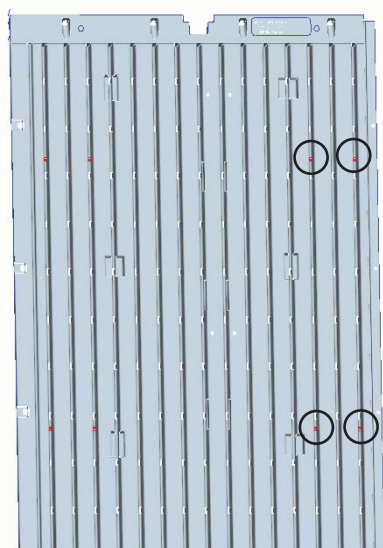

Left Wall Panel



Window Panel located here



Right Wall Panel




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADS (x8)

SEC 9

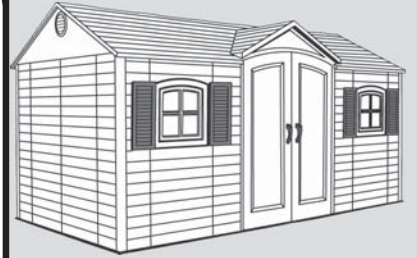


SEC

9.3

Look at the diagrams below and the holes at the top and the bottom of the shutter to determine which set you should use.

Have one person line up the correct holes in the back of the shutters, with the holes that you pre-drilled. A second person, inside the shed will insert a **1/4" x 3/4" Phillips Pan-Head Screw (ADS)** through the shed and into the **Shutter (AYI)**. Do this for each of your pre-drilled holes.

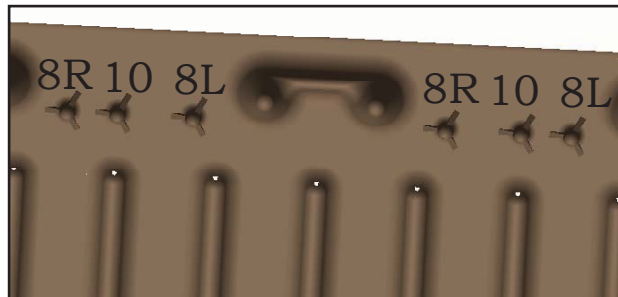

Back of Shutter

Use hole #2 (the far left hole in each grouping) for this shutter.

Use hole #1 (the far right hole in each grouping) for this shutter.




Outside of Shed

SEC 10 PEGBOARD STRIP INSTALLATION


HARDWARE REQUIRED

Hardware shown at actual size




ADW (x10)
#10" x 3/4" Pan-Head Screw


Hardware shown at 50% of actual size

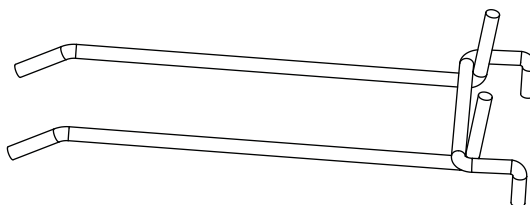


AIG (x1)
4" Double-Arm Hook




AIJ (x2)
Toolholder

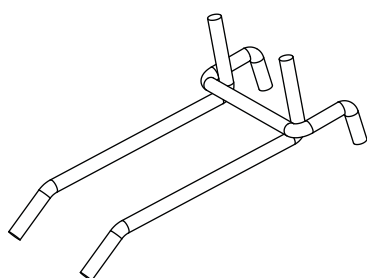

AIF (x1)
2" Double-Arm Hook



AIH (x3)
J-Hook




AII (x3)
L-Hook

METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION

PLASTIC PARTS REQUIRED

Parts shown at 15% of actual size




AFU (x2)
Pegboard Strip

TOOLS REQUIRED



Phillips Screwdriver





Safety Glasses



Level



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADW (x10)

SEC 10



SEC


10.1

PEGBOARD STRIP INSTALLATION

Using a level, position the **Pegboard Strip (AFU)** in any desired location along a Wall Panel wall. Screw the Pegboard Strip to the Wall using five (5) **#10 x 3/4" Phillips Pan-Head Screws (ADW)**. See Note. Repeat this step for second Pegboard Strip.



Note: The Pegboard Strip is screwed directly into the plastic. Line up the Strip anywhere on Wall so holes are over plastic (and not over a groove in the Wall).

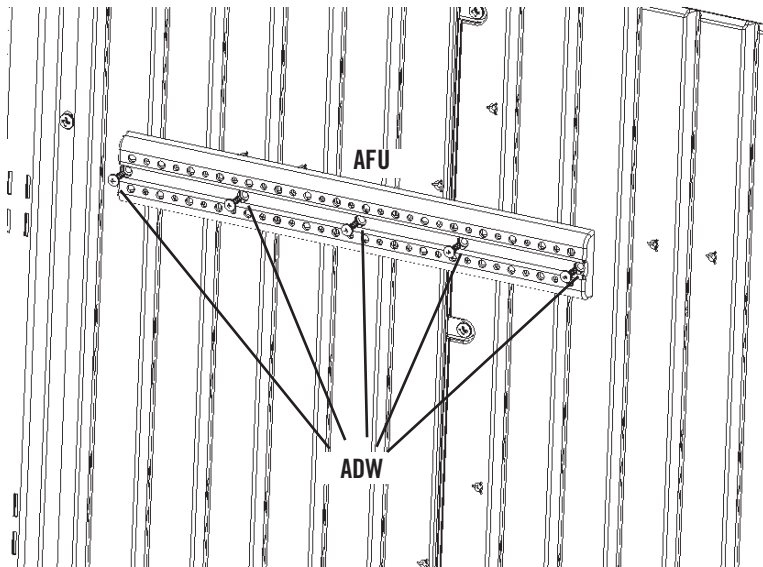

Note: Ensure the Pegboard Strip is level before inserting Screws.

SEC


10.2

Insert **Hooks (AIF, AIG, AIH, AII, and AIJ)**.

SEC 11 SHELF INSTALLATION

HARDWARE REQUIRED


Hardware shown at actual size




ADZ (x42)
1/4" x 5/8" Pan-Head Screw

METAL PARTS REQUIRED

Part shown at 8% of actual size



67 3/4"



AFM (x4)
Wall/Shelf Support Channel

Part shown at 15% of actual size




AIY (x4)
10" Shelf Bracket

PLASTIC PARTS REQUIRED

Part shown at 8% of actual size




AFV (x2)
90" Shelf




AFZ (x4)
Corner Shelf

TOOLS REQUIRED






Phillips Screwdriver



Safety Glasses




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x16)

SEC 11


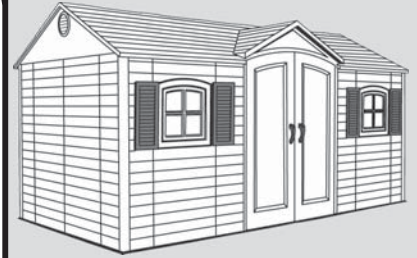


SEC

11.1



SHELF SUPPORT CHANNEL INSTALLATION

Insert a **Shelf Support Channel (AFM)** into the groove in the Wall Panels directly below the Right Truss notch, align the four holes in the Wall/Shelf Support Channel with those along the groove and secure with four (4) **1/4" x 5/8" Pan-Head Screws (ADZ)**. Insert a second Shelf Support Channel in the slot directly to the right of the Left Truss Notch and secure with four (4) 1/4" x 5/8" Pan-Head Screws.

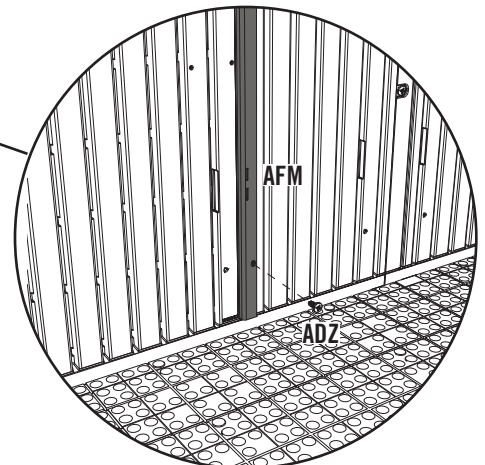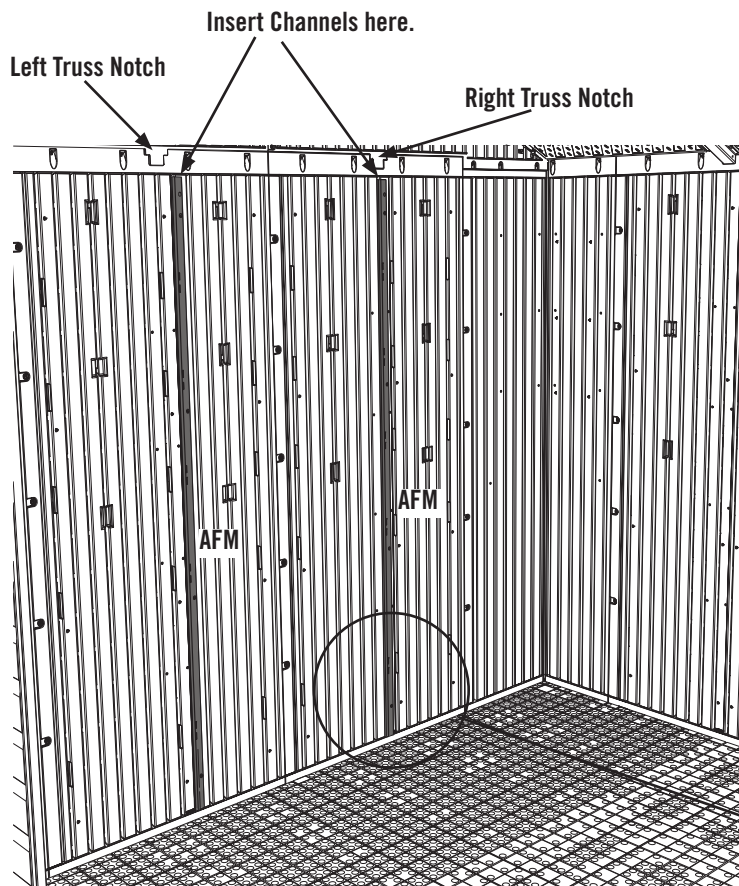




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x12)

SEC 11

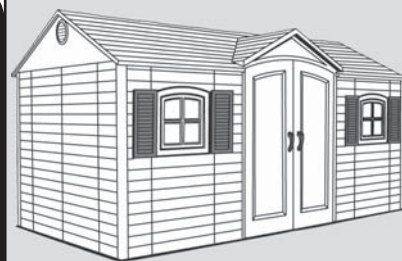


SEC

11.2

90" SHELF INSTALLATION

Set a **Shelf Support Bracket (AIY)** into the slots of each of the Shelf Support Channels. The slots must be at the same height.

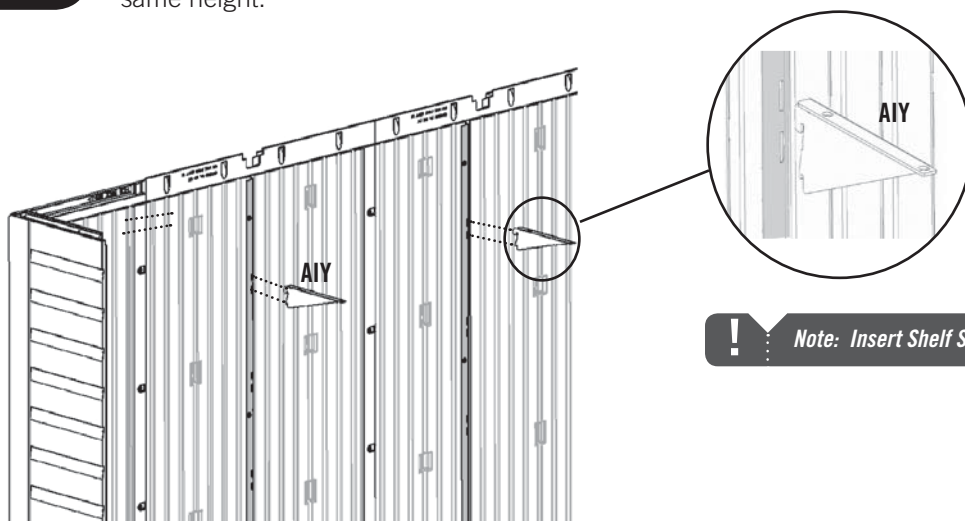


Note: Insert Shelf Support Bracket at an angle.


SEC

11.3

Fold up flaps on the end of **90" Shelf (AFV)**. Set Shelf on Brackets with indentations toward wall, and secure with six (6) **1/4" x 5/8" Phillips Pan-Head Screws (ADZ)**. Repeat this section for the other side of the shed.

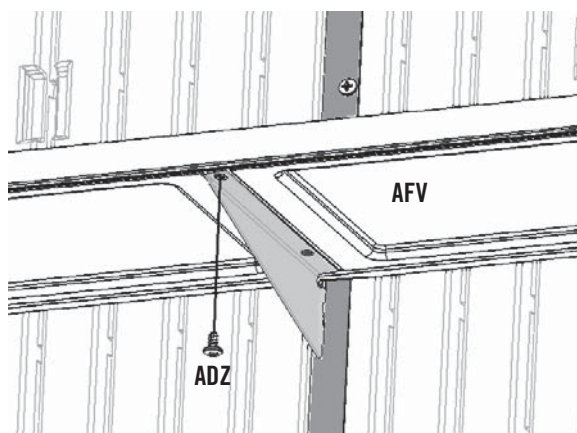

Upward view

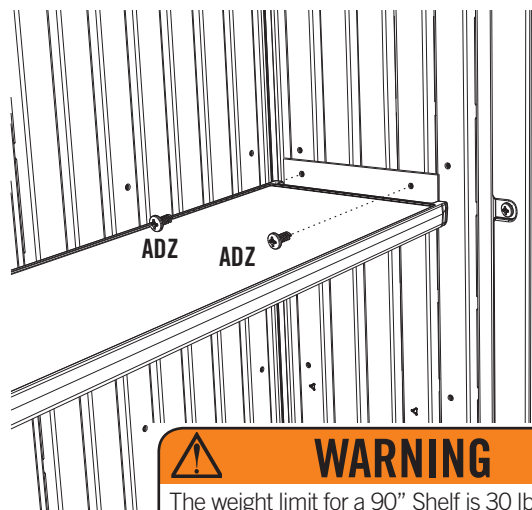

WARNING



The weight limit for a 90" Shelf is 30 lb. per 30" section of Wall Panel. Failure to heed this warning could result in property damage and/or personal injury.



Note: There are only holes for screws along front side of the Shelf (front is labeled "Front" on underside of Shelf).




TOOLS AND HARDWARE REQUIRED FOR THIS PAGE



ADZ (x16)

SEC. 11

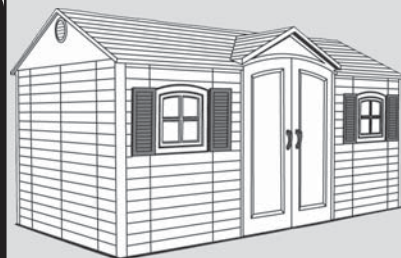


SEC

11.4

CORNER SHELF INSTALLATION

Fold up edges of a **Corner Shelf (AFZ)**. Line-up holes in the Corner Shelf with a set of pre-made holes in any Corner Panel as shown. Secure with four (4) $\frac{1}{4}$ " x $\frac{5}{8}$ " **Phillips Pan-Head Screws (ADZ)**. Repeat this step for the rest of the **Corner Shelves**.

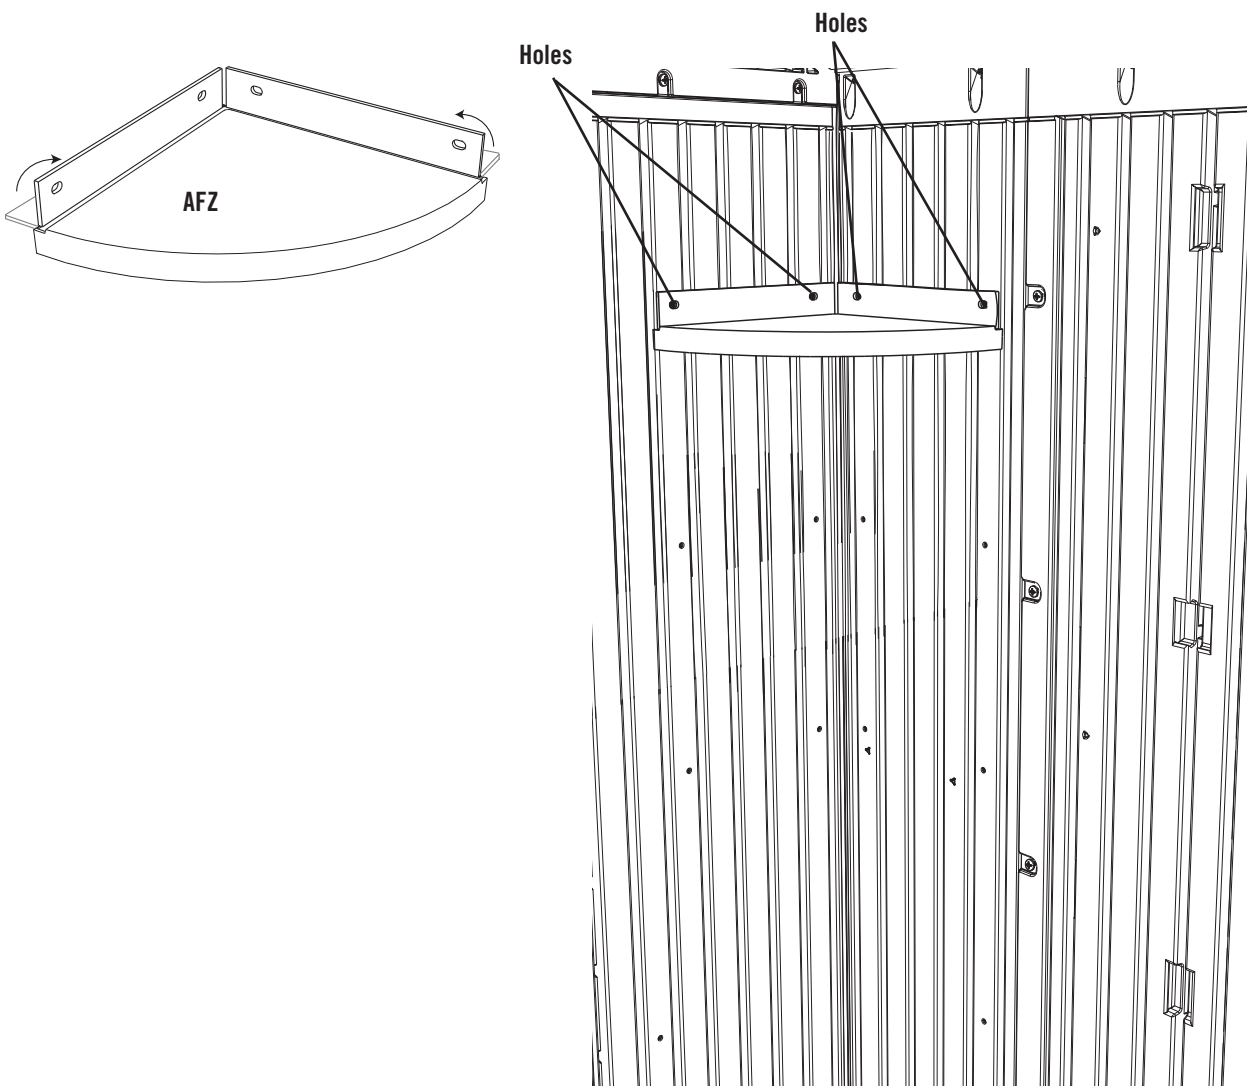

WARNING

The total weight placed on a Corner Shelf cannot exceed 10 lb. (4.5 kg).

SEC. 12 DOOR ALIGNMENT & SHED ANCHORING

HARDWARE REQUIRED

NO HARDWARE REQUIRED FOR THIS SECTION


METAL PARTS REQUIRED

NO METAL PARTS REQUIRED FOR THIS SECTION


PLASTIC PARTS REQUIRED

NO PLASTIC PARTS REQUIRED FOR THIS SECTION

TOOLS REQUIRED



Rubber Mallet





Safety Glasses



AIX (x4)
Wood Shim (Provided)



TOOLS AND HARDWARE REQUIRED FOR THIS PAGE




AIX (x4)

Wood Shim (Not actual size)

NO HARDWARE REQUIRED FOR THIS PAGE

SEC 12

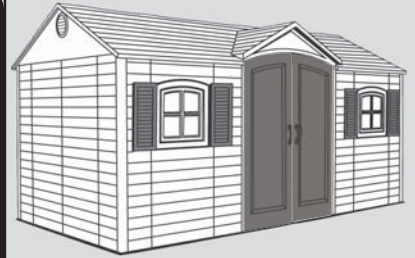

SEC

12.1

DOOR ALIGNMENT

In some cases, the shed doors may not completely line up at the tops (Fig. 1). When this happens, identify which side is higher and use a **Wooden Shim (AIX)** to slightly raise the back corner of the high side until doors line up (Fig. 2). If doors need further adjustment, insert another shim under the front corner opposite of the first shim. If the doors still need further adjustment, stack additional shims (one at a time) alternating between the back and front shims. After doors are aligned, cut off any portion of wood shim that is still exposed. From inside the shed, drive a 1" nail through the floor into the shim to hold it in place. **Tighten all anchoring hardware now.**

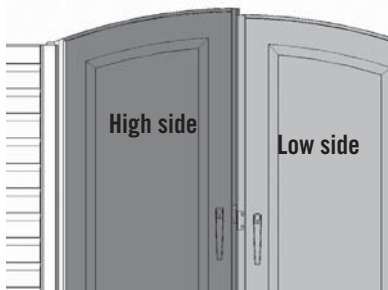


Fig. 1


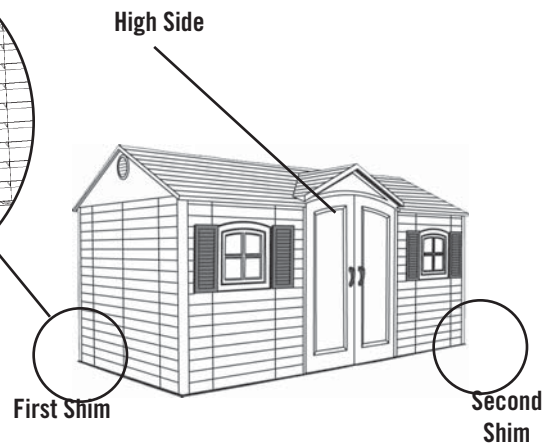


Fig. 2

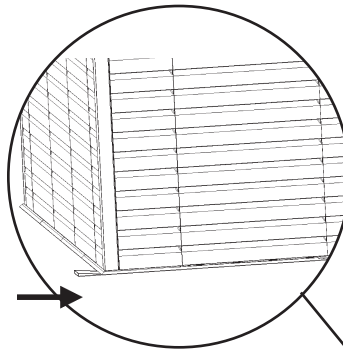

Note: Shim should be placed at the corner, running directly under one wall.

LIFETIME OUTDOOR SHED EQUIPMENT

10-YEAR LIMITED FACTORY WARRANTY

THE MANUFACTURER RESERVES THE RIGHT TO MAKE SUBSTITUTIONS TO WARRANTY CLAIMS IF PARTS ARE UNAVAILABLE OR OBSOLETE.

1. Lifetime outdoor sheds are warranted to the original purchaser to be free from defects in material or workmanship for a period of ten years from the date of original retail purchase. The word "defects" is defined as imperfections that impair the use of the product. Defects resulting from misuse, abuse or negligence will void this warranty. This warranty does not cover defects due to improper installation, alteration or accident. This warranty does not cover damage caused by vandalism, rusting, "acts of nature" or any other event beyond the control of the manufacturer.
2. This warranty is nontransferable and is expressly limited to the repair or replacement of defective product. If the product is defective within the terms of this warranty, Lifetime Products, Inc. will repair or replace defective parts at no cost to the purchaser. Shipping charges to and from the factory are not covered and are the responsibility of the purchaser. Labor charges and related expenses for removal, installation or replacement of the shed or its components are not covered under this warranty.
3. This warranty does not cover scratching or scuffing of the product that may result from normal usage. In addition, defects resulting from intentional damage, negligence, unreasonable use or hanging from the truss will void this warranty.
4. Liability for incidental or consequential damages is excluded to the extent permitted by law. While every attempt is made to embody the highest degree of safety in all equipment, freedom from injury cannot be guaranteed. The user assumes all risk of injury resulting from the use of this product. All merchandise is sold on this condition, and no representative of the company may waive or change this policy.
5. This product is not intended for institutional or commercial use; Lifetime Products, Inc. does not assume any liability for such use. Institutional or commercial use will void the warranty.
6. This warranty is expressly in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for use to extent permitted by Federal and state law. Neither Lifetime Products, Inc., nor any representative assumes any other liability in connection with this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

ALL WARRANTY CLAIMS MUST BE ACCOMPANIED BY A SALES RECEIPT.

REPORT PRODUCT DEFECTS IN WRITING TO:

Lifetime Products, Inc., PO Box 160010 Clearfield, UT 84016-0010
or call (800) 225-3865 M-F 7 a.m. to 5 p.m. MST.

Please include your dated sales receipt and photographs of damaged parts.

To register the product, visit our Web site at www.lifetime.com



www.lifetime.com

©2004 Lifetime Products, Inc.

PO Box 160010 • Freeport Center, Bldg. D-11 Clearfield, Utah 84016-0010
T: 800-225-3865 • F: 801-728-1907

ENHANCE YOUR LIFETIME® PURCHASE BY ADDING ACCESSORIES OR OTHER GREAT PRODUCTS

To purchase accessories or other Lifetime Products, visit us at:

www.lifetime.com

Or call: 1-800-424-3865

